



## Table of Contents

|  |           |  |           |
|--|-----------|--|-----------|
| <b>1 特長</b> .....                              | <b>1</b>  | <b>9 Application and Implementation</b> .....          | <b>19</b> |
| <b>2 アプリケーション</b> .....                        | <b>1</b>  | 9.1 Application Information.....                       | 19        |
| <b>3 概要</b> .....                              | <b>1</b>  | 9.2 Typical Applications.....                          | 19        |
| <b>4 Revision History</b> .....                | <b>2</b>  | <b>10 Power Supply Recommendations</b> .....           | <b>25</b> |
| <b>5 Device Comparison</b> .....               | <b>3</b>  | <b>11 Layout</b> .....                                 | <b>26</b> |
| <b>6 Pin Configuration and Functions</b> ..... | <b>4</b>  | 11.1 Layout Guidelines.....                            | 26        |
| <b>7 Specifications</b> .....                  | <b>5</b>  | 11.2 Layout Examples.....                              | 26        |
| 7.1 Absolute Maximum Ratings .....             | 5         | <b>12 Device and Documentation Support</b> .....       | <b>27</b> |
| 7.2 ESD Ratings .....                          | 5         | 12.1 Device Support.....                               | 27        |
| 7.3 Recommended Operating Conditions .....     | 5         | 12.2 Documentation Support.....                        | 27        |
| 7.4 Thermal Information .....                  | 5         | 12.3 Receiving Notification of Documentation Updates.. | 27        |
| 7.5 Electrical Characteristics .....           | 6         | 12.4 サポート・リソース.....                                    | 27        |
| 7.6 Typical Characteristics.....               | 8         | 12.5 Trademarks.....                                   | 27        |
| <b>8 Detailed Description</b> .....            | <b>14</b> | 12.6 Electrostatic Discharge Caution.....              | 27        |
| 8.1 Overview.....                              | 14        | 12.7 Glossary.....                                     | 27        |
| 8.2 Functional Block Diagram.....              | 14        | <b>13 Mechanical, Packaging, and Orderable</b>         |           |
| 8.3 Feature Description.....                   | 15        | <b>Information</b> .....                               | <b>27</b> |
| 8.4 Device Functional Modes.....               | 18        |  |           |

## 4 Revision History

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

| Changes from Revision * (February 2021) to Revision A (April 2021) | Page |
|--|------|
| • ドキュメントのステータスを「事前情報」から「量産データ」に変更.....                             | 1    |

## 5 Device Comparison


表 5-1. OPA607-Q1 vs OPA2607-Q1

| DEVICE     | NO. OF CHANNELS | PACKAGE LEADS |              |
|------------|-----------------|---------------|--------------|
|            |                 | VSSOP (DGK)   | SOT-23 (DBV) |
| OPA607-Q1  | 1               | —             | 5            |
| OPA2607-Q1 | 2               | 8             | —            |

表 5-2. OPAX607-Q1 vs Other Automotive Op-Amps from TI

| DEVICE                     | INPUT   | OFFSET DRIFT<br>( $\mu\text{V}/^\circ\text{C}$ , TYP) | MINIMUM<br>STABLE GAIN<br>(V/V) | $I_Q$ / CHANNEL<br>(mA, TYP) | GBW<br>(MHz) | SLEW RATE<br>(V/ $\mu\text{s}$ ) | VOLTAGE<br>NOISE<br>(nV/ $\sqrt{\text{Hz}}$ ) |
|----------------------------|---------|---|---------------------------------|------------------------------|--------------|----------------------------------|---|
| <a href="#">OPAx365-Q1</a> | CMOS    | 1   | 1                               | 4.6                          | 50           | 25                               | 4.5   |
| <a href="#">OPAx607-Q1</a> | CMOS    | 0.3   | 6                               | 0.9                          | 50           | 24                               | 3.8   |
| <a href="#">OPAx836-Q1</a> | Bipolar | 1.1   | 1                               | 0.95                         | 110          | 240                              | 4.6   |


## 6 Pin Configuration and Functions

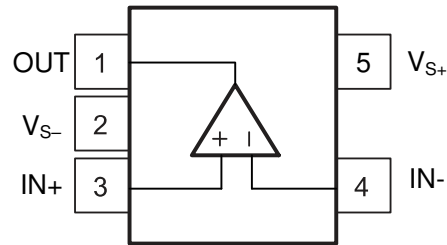

**FIG 6-1. DBV Package  
5-Pin SOT-23  
Top View**

### Pin Functions – Single Channel

| PIN             |     | I/O | DESCRIPTION   |
|-----------------|-----|-----|---|
| NAME            | DBV |     |   |
| IN–             | 4   | I   | Non Inverting Input                                     |
| IN+             | 3   | I   | Inverting Input   |
| OUT             | 1   | O   | Output  |
| V <sub>S–</sub> | 2   | —   | Negative supply or ground (for single-supply operation) |
| V <sub>S+</sub> | 5   | —   | Positive supply   |

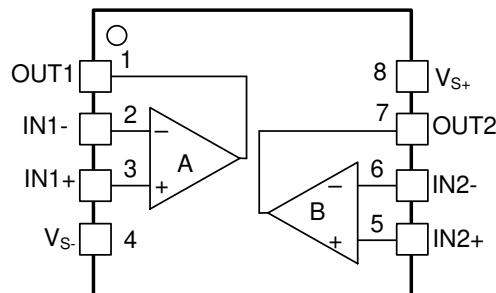

**FIG 6-2. OPA2607-Q1 DGK  
8-Pin, VSSOP  
Top View**

### Pin Functions – Dual Channel

| PIN             |     | I/O | DESCRIPTION  |
|-----------------|-----|-----|--|
| NAME            | DGK |     |  |
| IN1–            | 2   | I   | Inverting input, channel 1                                       |
| IN1+            | 3   | I   | Noninverting input, channel 1                                    |
| IN2–            | 6   | I   | Inverting input, channel 2                                       |
| IN2+            | 5   | I   | Noninverting input, channel 2                                    |
| OUT1            | 1   | O   | Output, channel 1  |
| OUT2            | 7   | O   | Output, channel 2  |
| V <sub>S–</sub> | 4   | —   | Negative (lowest) supply or ground (for single-supply operation) |
| V <sub>S+</sub> | 8   | —   | Positive (highest) supply  |

## 7 Specifications

### 7.1 Absolute Maximum Ratings

Over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                       |   | MIN                                     | MAX              | UNIT |
|-----------------------|---|---|------------------|------|
| $(V_{S+}) - (V_{S-})$ | Supply voltage, $V_S$                     |   | 6                | V    |
| $V_{IN+}, V_{IN-}$    | Input voltage                             | $(V_{S-}) - 0.5$                        | $(V_{S+}) + 0.5$ | V    |
| $V_{ID}$              | Differential input voltage <sup>(4)</sup> |   | ±5               | V    |
| $I_I$                 | Continuous input current <sup>(2)</sup>   |   | ±10              | mA   |
| $I_O$                 | Continuous output current <sup>(3)</sup>  |   | ±20              | mA   |
|                       | Continuous power dissipation              | See <a href="#">Thermal Information</a> |                  |      |
| $T_J$                 | Maximum junction temperature              |   | 150              | °C   |
| $T_A$                 | Operating free-air temperature            | –40                                     | 150              | °C   |
| $T_{stg}$             | Storage temperature                       | –65                                     | 150              | °C   |

- (1) Stresses above these ratings may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those specified is not supported.
- (2) Input terminals are diode-clamped to the power-supply rails. Input signals that can swing more than 0.5 V beyond the supply rails should be current limited to 10 mA or less.
- (3) Short-circuit to ground, one amplifier per package.
- (4) Long term drift of offset voltage (> 1mV) if a differential input in excess of ≈ 2V is applied continuously between the IN+ and IN- pins at elevated temperatures.

### 7.2 ESD Ratings

|             |                         |   | VALUE | UNIT |
|-------------|-------------------------|---|-------|------|
| $V_{(ESD)}$ | Electrostatic discharge | Human-body model (HBM), per AEC Q100-002 <sup>(1)</sup> | ±2000 | V    |
|             |                         | Charged-device model (CDM), per AEC Q100-011            | ±1000 |      |

- (1) AEC Q100-002 indicates that HBM stressing shall be in accordance with ANSI/ESDA/JEDEC JS-001 Specification

### 7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|       |                                      | MIN  | NOM | MAX   | UNIT |
|-------|--------------------------------------|------|-----|-------|------|
| $V_S$ | Supply voltage $(V_{S+}) - (V_{S-})$ | 2.2  |     | 5.5   | V    |
|       |                                      | ±1.1 |     | ±2.75 |      |
| $T_A$ | Ambient operating temperature        | –40  | 25  | 125   | °C   |

### 7.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |  | OPA607-Q1   |              | UNIT |
|-------------------------------|--|-------------|--------------|------|
|                               |  | DBV (SOT23) | DGK (VSSOP8) |      |
|                               |  | 5 PINS      | 8 PINS       |      |
| $R_{\theta JA}$               | Junction-to-ambient thermal resistance       | 196.5       | 179          | °C/W |
| $R_{\theta JC(top)}$          | Junction-to-case (top) thermal resistance    | 118.7       | 71           | °C/W |
| $R_{\theta JB}$               | Junction-to-board thermal resistance         | 64.5        | 101          | °C/W |
| $\psi_{JT}$                   | Junction-to-top characterization parameter   | 41.1        | 13.7         | °C/W |
| $\psi_{JB}$                   | Junction-to-board characterization parameter | 64.2        | 100          | °C/W |

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 7.5 Electrical Characteristics

At  $T_A = 25^\circ\text{C}$ ,  $V_S = 2.2\text{ V}$  to  $5.5\text{ V}$ ,  $G = 6\text{ V/V}$ <sup>(3)</sup>,  $R_F = 5\text{ k}\Omega$ ,  $C_F = 2.5\text{ pF}$ ,  $V_{CM} = (V_S / 2) - 0.5\text{ V}$ ,  $C_L = 10\text{ pF}$ ,  $R_L = 10\text{ k}\Omega$  connected to  $(V_S / 2) - 0.5\text{ V}$  and PD connected to  $(V_{S+})$  (unless otherwise noted)<sup>(1)</sup>

| PARAMETER                                 |  | TEST CONDITIONS   | MIN                | TYP             | MAX                      | UNIT             |
|---|--|---|--------------------|-----------------|--------------------------|------------------|
| OFFSET VOLTAGE                            |  |   |                    |                 |                          |                  |
| V <sub>OS</sub>                           | Input offset voltage                             |   |                    | ±0.1            | ±0.6                     | mV               |
|   |  | T <sub>A</sub> = −40°C to +125°C <sup>(2)</sup>                           |                    | ±0.1            | ±0.7                     |                  |
| dV <sub>OS</sub> /dT                      | Input offset voltage drift <sup>(2)</sup>        | T <sub>A</sub> = −40°C to +125°C  |                    | ±0.3            | ±1.5                     | μV/°C            |
| PSRR                                      | Power-supply rejection ratio                     | V <sub>S</sub> = 2.2 V to 5.5 V   | 95                 | 110             |                          | dB               |
|   |  | T <sub>A</sub> = −40°C to +125°C  | 95                 |                 |                          |                  |
| INPUT VOLTAGE RANGE                       |  |   |                    |                 |                          |                  |
| V <sub>CM</sub>                           | Common-mode voltage range                        |   | (V <sub>S−</sub> ) |                 | (V <sub>S+</sub> ) − 1.1 | V                |
| CMRR                                      | Common-mode rejection ratio                      | (V <sub>S−</sub> ) < V <sub>CM</sub> < (V <sub>S+</sub> ) − 1.1 V         | 90                 | 100             |                          | dB               |
|   |  | T <sub>A</sub> = −40°C to +125°C  | 86                 |                 |                          |                  |
| INPUT BIAS CURRENT                        |  |   |                    |                 |                          |                  |
| I <sub>B</sub>                            | Input bias current <sup>(2)</sup>                |   |                    | ±3              | ±10                      | pA               |
|   |  | T <sub>A</sub> = −40°C to 125°C   |                    | See Figure 7-27 |                          |                  |
| I <sub>OS</sub>                           | Input offset current <sup>(2)</sup>              |   |                    | ±3              | ±10                      |                  |
| NOISE                                     |  |   |                    |                 |                          |                  |
|   | Input voltage noise (peak-to-peak)               | f = 0.1 Hz to 10 Hz   |                    | 1.6             |                          | μV <sub>PP</sub> |
| e <sub>N</sub>                            | Input voltage noise density                      | f = 10 kHz, 1/f corner at 1 kHz   |                    | 3.8             |                          | nV/√Hz           |
| i <sub>N</sub>                            | Input current noise density                      | f = 1 kHz   |                    | 46              |                          | fA/√Hz           |
| INPUT IMPEDANCE                           |  |   |                    |                 |                          |                  |
| C <sub>IN</sub>                           | Differential                                     |   |                    | 11.5            |                          | pF               |
|   | Common-mode                                      |   |                    | 5.5             |                          |                  |
| OPEN-LOOP GAIN                            |  |   |                    |                 |                          |                  |
| A <sub>OL</sub>                           | Open-loop voltage gain                           | (V <sub>S−</sub> )+400 mV<V <sub>OUT</sub> <(V <sub>S+</sub> )−400 mV     | 110                | 130             |                          | dB               |
|   |  | T <sub>A</sub> = −40°C to +125°C  | 100                |                 |                          |                  |
|   | Phase margin                                     |   |                    | 65              |                          | °                |
| AC Characteristics (V <sub>S</sub> = 5 V) |  |   |                    |                 |                          |                  |
| SSBW                                      | Small-signal bandwidth                           | V <sub>OUT</sub> = 20 mVpp  |                    | 10              |                          | MHz              |
| GBW                                       | Gain-bandwidth product                           | G = 20 V/V  |                    | 50              |                          |                  |
| SR  | Slew rate  | 3-V output step (10-90%)  |                    | 24              |                          | V/μs             |
| t <sub>S</sub>                            | Settling time                                    | To 0.1%, 3-V step, G = 40   |                    | 1               |                          | μs               |
|   |  | To 0.01%, 3-V step, G = 40  |                    | 1.8             |                          |                  |
|   | Overdrive recovery time                          | V <sub>IN+</sub> × Gain > V <sub>S</sub>                                  |                    | 0.25            |                          | μs               |
| THD+N                                     | Total Harmonic Distortion + Noise <sup>(4)</sup> | V <sub>OUT</sub> = 2 V <sub>PP</sub> , f = 1 kHz ,R <sub>L</sub> = 10 kΩ  |                    | -103            |                          | dB               |
|   |  | V <sub>OUT</sub> = 2 V <sub>PP</sub> , f = 20 kHz ,R <sub>L</sub> = 10 kΩ |                    | -91.5           |                          |                  |
|   |  | V <sub>OUT</sub> = 2 V <sub>PP</sub> , f = 1 kHz ,R <sub>L</sub> = 1 kΩ   |                    | -96             |                          |                  |
|   |  | V <sub>OUT</sub> = 2 V <sub>PP</sub> , f = 20 kHz ,R <sub>L</sub> = 1 kΩ  |                    | -72.8           |                          |                  |
| HD2                                       | Second-order harmonic distortion                 | V <sub>OUT</sub> = 2 V <sub>PP</sub> , f = 20 kHz                         |                    | -105            |                          | dBc              |
| HD3                                       | Third-order harmonic distortion                  | V <sub>OUT</sub> = 2 V <sub>PP</sub> , f = 20 kHz                         |                    | -95             |                          |                  |

## 7.5 Electrical Characteristics (continued)

At  $T_A = 25^\circ\text{C}$ ,  $V_S = 2.2\text{ V to }5.5\text{ V}$ ,  $G = 6\text{ V/V}$ <sup>(3)</sup>,  $R_F = 5\text{ k}\Omega$ ,  $C_F = 2.5\text{ pF}$ ,  $V_{CM} = (V_S / 2) - 0.5\text{ V}$ ,  $C_L = 10\text{ pF}$ ,  $R_L = 10\text{ k}\Omega$  connected to  $(V_S / 2) - 0.5\text{ V}$  and PD connected to  $(V_{S+})$  (unless otherwise noted)<sup>(1)</sup>

| PARAMETER           |  | TEST CONDITIONS                                 | MIN | TYP | MAX  | UNIT          |
|---------------------|--|---|-----|-----|------|---------------|
| <b>OUTPUT</b>       |  |   |     |     |      |               |
|                     | Output voltage swing from supply rails |   |     | 8   | 12   | mV            |
|                     |  | $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ |     |     | 12   |               |
| $I_{SC}$            | Output Short-circuit current           |   |     | 60  |      | mA            |
| $Z_O$               | Open-loop output impedance             | $f = 1\text{ MHz}$                              |     | 500 |      | $\Omega$      |
| <b>POWER SUPPLY</b> |  |   |     |     |      |               |
| $I_Q$               | Quiescent current per amplifier        | $I_O = 0\text{ mA}$                             |     | 900 | 1100 | $\mu\text{A}$ |
|                     |  | $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ |     |     | 1200 |               |

- (1) Parameters with minimum or maximum specification limits are 100% production tested at  $25^\circ\text{C}$ , unless otherwise noted. Over temperature limits are based on characterization and statistical analysis.
- (2) Specified by design or/and characterization; not production tested.
- (3) All Gains (G) mentioned are in V/V unless otherwise noted.
- (4) Lowpass-filter bandwidth is 92kHz for  $f = 20\text{ kHz}$  and 20 kHz for  $f = 1\text{ kHz}$ .

## 7.6 Typical Characteristics

At  $T_A = +25^\circ\text{C}$ ,  $V_S = 5.5\text{ V}$ ,  $R_L = 10\text{ k}\Omega$ ,  $R_F = 5\text{ k}\Omega$ ,  $C_F = 2.5\text{ pF}$ ,  $V_{CM} = \text{midsupply} - 0.5\text{ V}$ ,  $G = 6\text{ V/V}$  (unless otherwise noted).

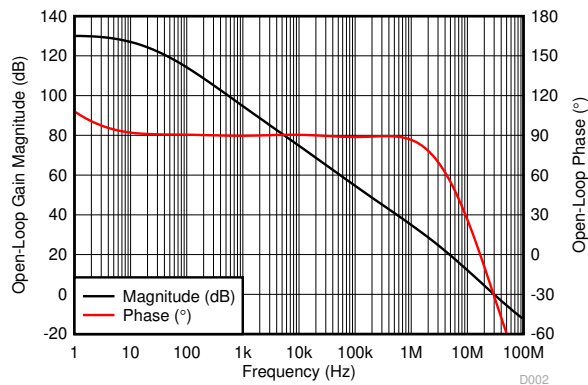


FIG 7-1. Open Loop Gain and Phase vs Frequency

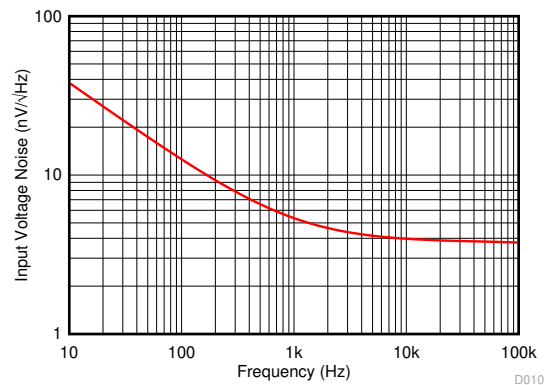


FIG 7-2. Input Voltage Noise Density vs Frequency

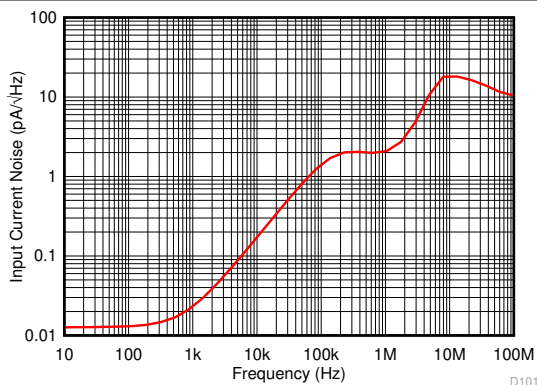


FIG 7-3. Input Current Noise Density vs Frequency

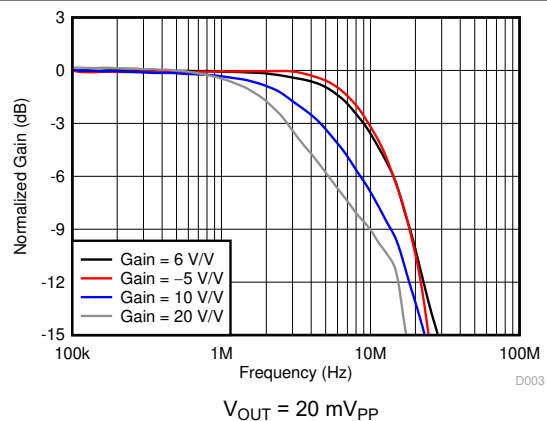


FIG 7-4. Small-Signal Frequency Response vs Gain

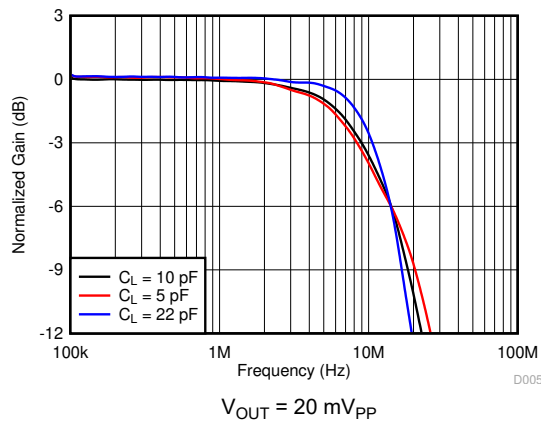


FIG 7-5. Small-Signal Frequency Response vs Capacitive Load


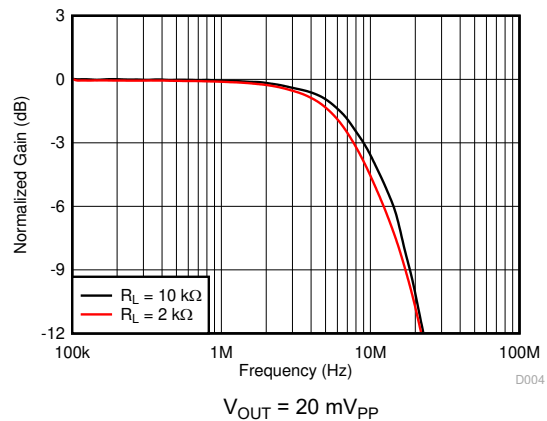


FIG 7-6. Small-Signal Frequency Response vs Output Load




## 7.6 Typical Characteristics (continued)


At  $T_A = +25^\circ\text{C}$ ,  $V_S = 5.5\text{ V}$ ,  $R_L = 10\text{ k}\Omega$ ,  $R_F = 5\text{ k}\Omega$ ,  $C_F = 2.5\text{ pF}$ ,  $V_{CM} = \text{midsupply} - 0.5\text{ V}$ ,  $G = 6\text{ V/V}$  (unless otherwise noted).

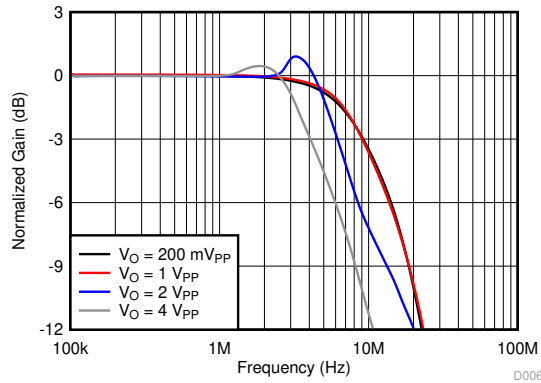


7-7. Large-Signal Frequency Response vs Output Voltage

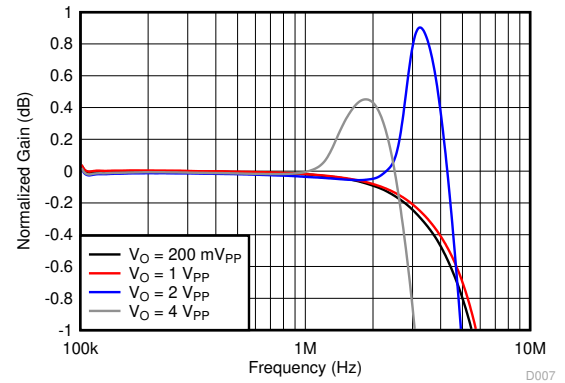


7-8. Large-Signal Response Flatness vs Frequency

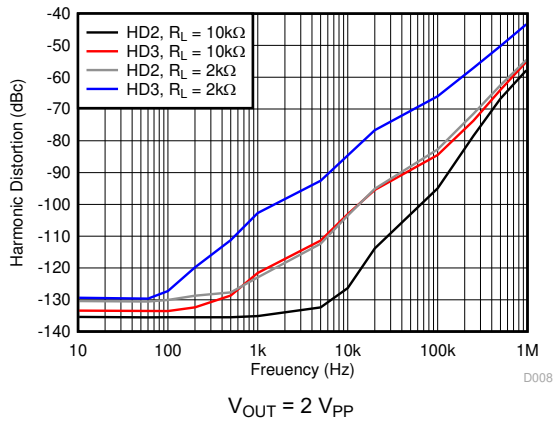


7-9. Harmonic Distortion vs Frequency

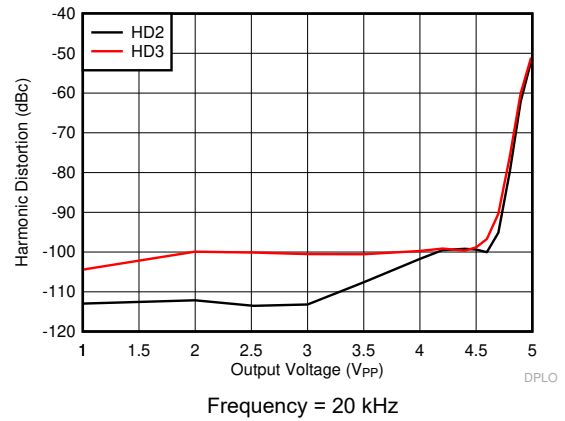

7-10. Harmonic Distortion vs Output Voltage

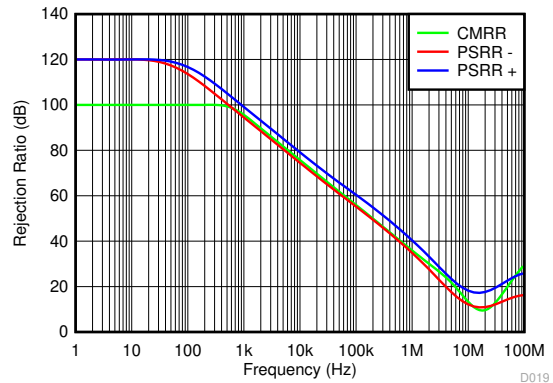

7-11. Rejection Ratio vs frequency

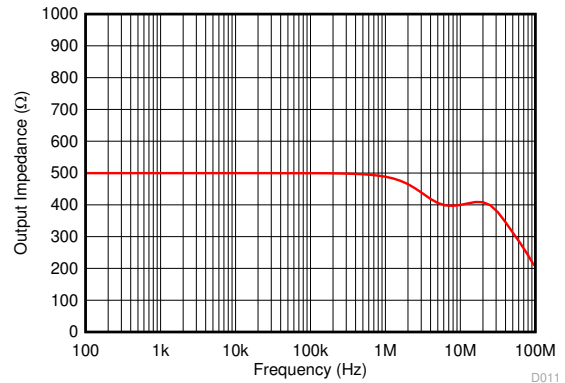

7-12. Open Loop Output Impedance vs Frequency

## 7.6 Typical Characteristics (continued)

At  $T_A = +25^\circ\text{C}$ ,  $V_S = 5.5\text{ V}$ ,  $R_L = 10\text{ k}\Omega$ ,  $R_F = 5\text{ k}\Omega$ ,  $C_F = 2.5\text{ pF}$ ,  $V_{CM} = \text{midsupply} - 0.5\text{ V}$ ,  $G = 6\text{ V/V}$  (unless otherwise noted).



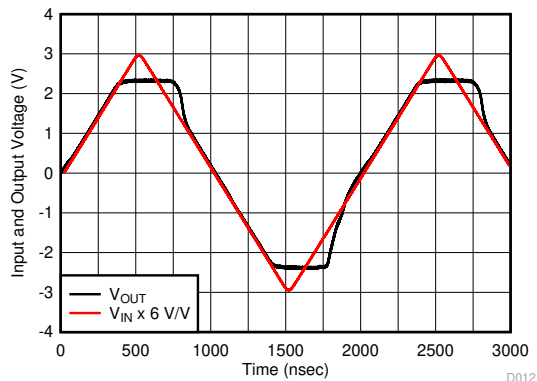


FIG 7-13. Output Overdrive Recovery

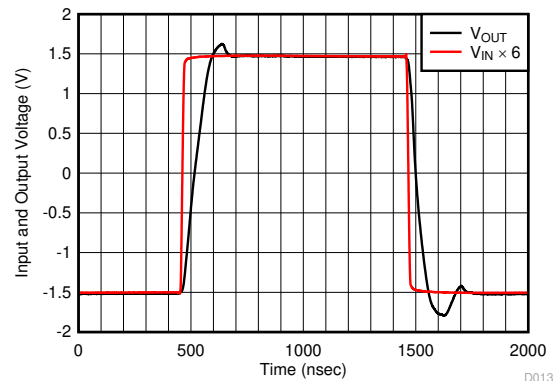

$T_{RISE} = 1\text{ }\mu\text{sec}$ ,  $T_{FALL} = 0.7\text{ }\mu\text{sec}$

FIG 7-14. Large-Signal Transient Response

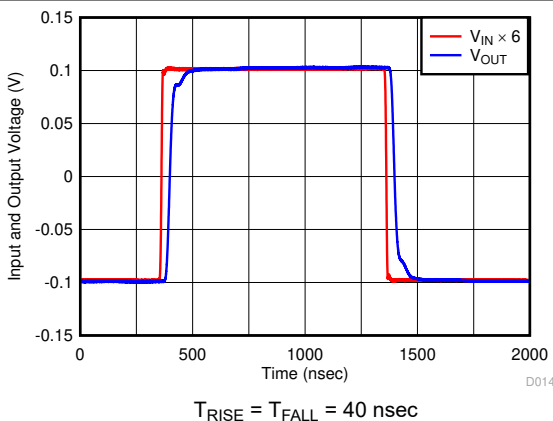

$T_{RISE} = T_{FALL} = 40\text{ nsec}$

FIG 7-15. Small-Signal Transient Response


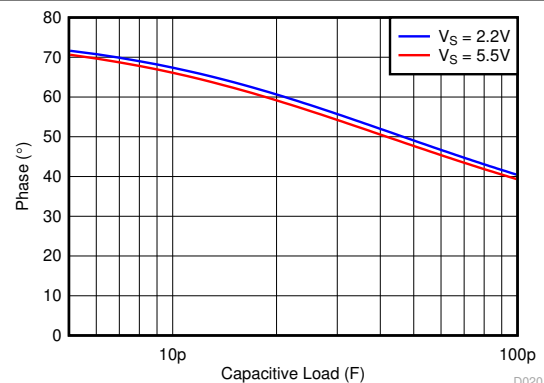


FIG 7-16. Phase Margin vs Capacitive Load

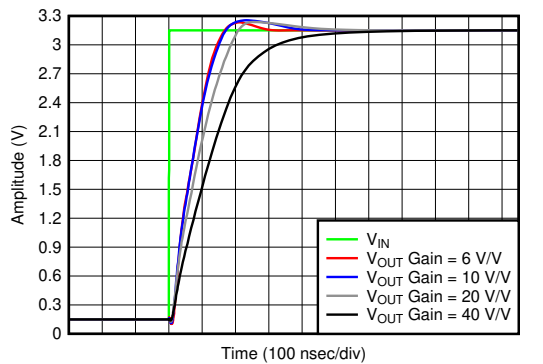

Simulated

FIG 7-17. Step Settling Time


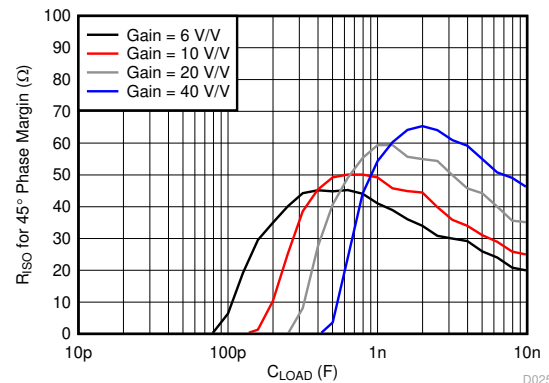



FIG 7-18. Recommended Isolation Resistor vs Capacitive Load

## 7.6 Typical Characteristics (continued)


At  $T_A = +25^\circ\text{C}$ ,  $V_S = 5.5\text{ V}$ ,  $R_L = 10\text{ k}\Omega$ ,  $R_F = 5\text{ k}\Omega$ ,  $C_F = 2.5\text{ pF}$ ,  $V_{CM} = \text{midsupply} - 0.5\text{ V}$ ,  $G = 6\text{ V/V}$  (unless otherwise noted).

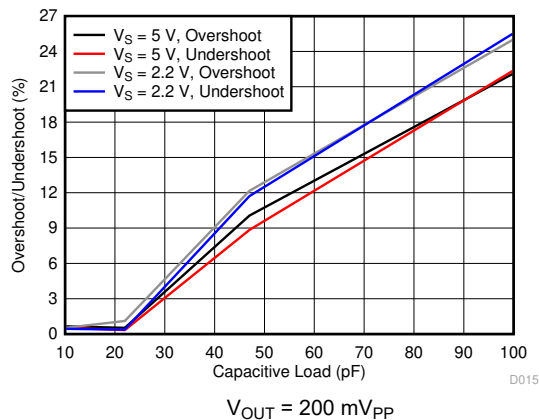


**7-19. Overshoot vs Capacitive Load**

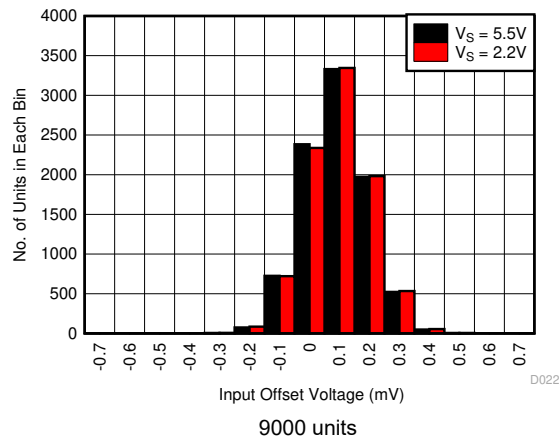


**7-20. Input Offset Voltage Distribution**

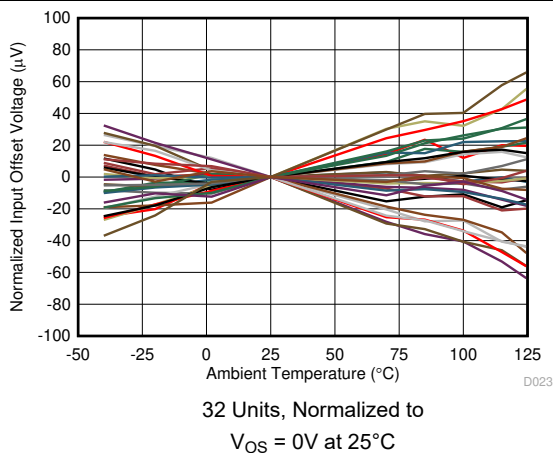


**7-21. Input Offset Voltage vs Temperature**

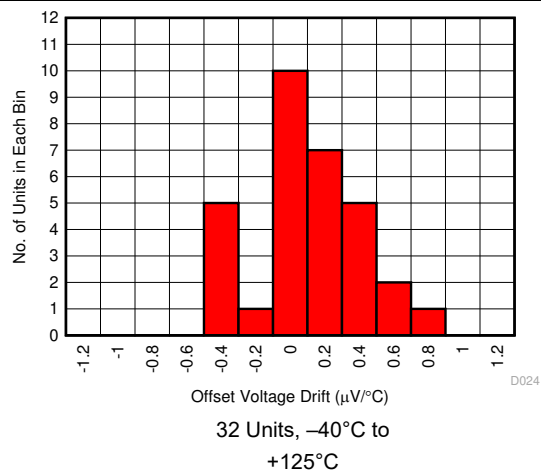

**7-22. Input Offset Drift Distribution**

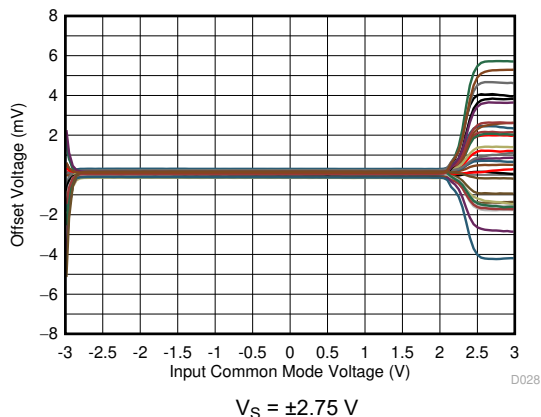


**7-23. Input Offset vs Common Mode Voltage**

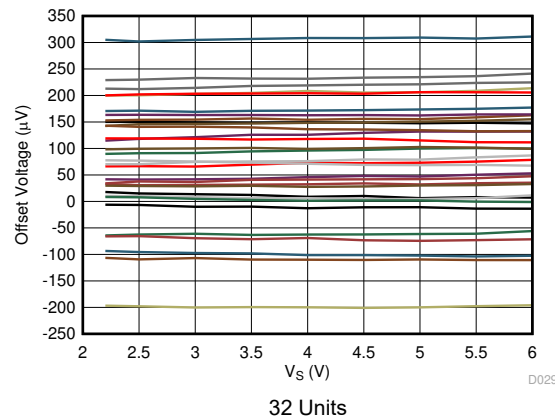


**7-24. Input Offset vs Supply**

## 7.6 Typical Characteristics (continued)


At  $T_A = +25^\circ\text{C}$ ,  $V_S = 5.5\text{ V}$ ,  $R_L = 10\text{ k}\Omega$ ,  $R_F = 5\text{ k}\Omega$ ,  $C_F = 2.5\text{ pF}$ ,  $V_{CM} = \text{midsupply} - 0.5\text{ V}$ ,  $G = 6\text{ V/V}$  (unless otherwise noted).

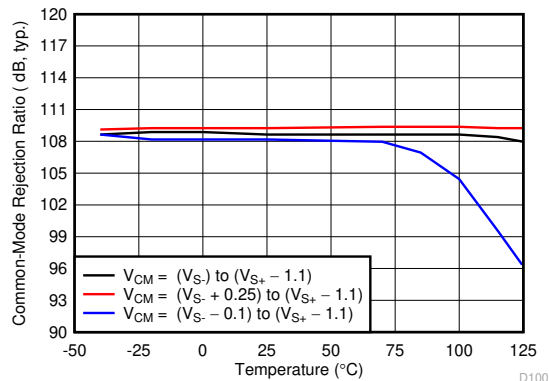


7-25. Common Mode Rejection Ratio vs Temperature

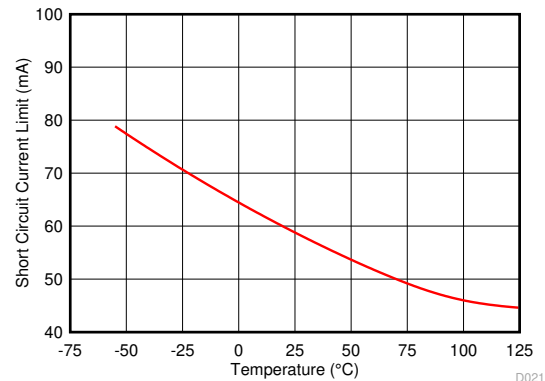


7-26. Short-Circuit Current vs Temperature

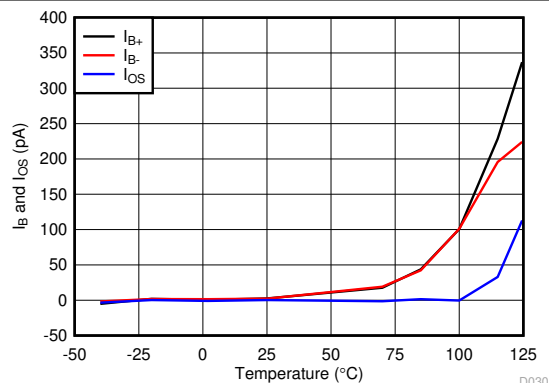


7-27. Input Bias and Offset Current vs Temperature

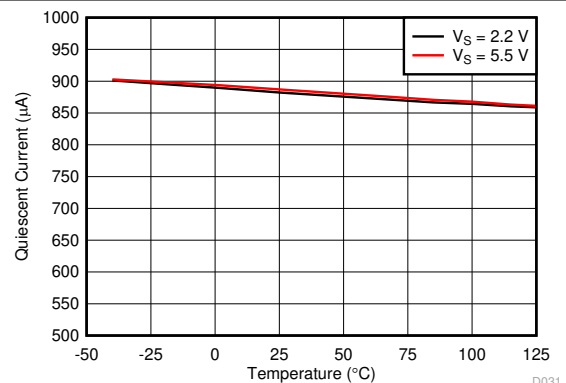

7-28. Quiescent Current vs Temperature

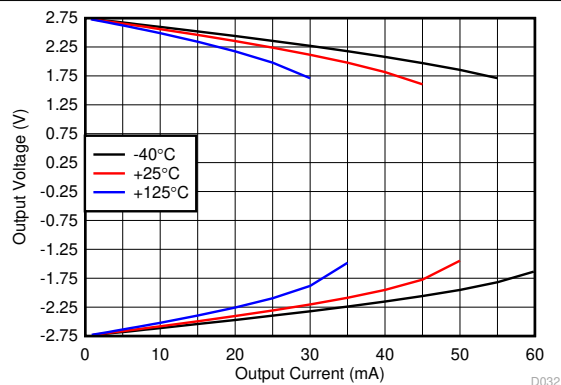


7-29. Output Voltage vs Output Current Sourcing and Sinking

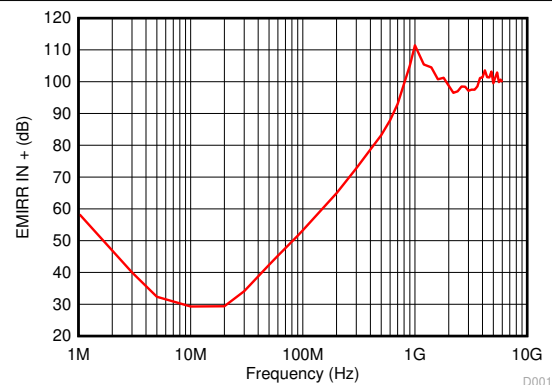

7-30. Electromagnetic Interference Rejection Ratio Referred to Noninverting Input (EMIRR+) vs Frequency

## 7.6 Typical Characteristics (continued)

At  $T_A = +25^\circ\text{C}$ ,  $V_S = 5.5\text{ V}$ ,  $R_L = 10\text{ k}\Omega$ ,  $R_F = 5\text{ k}\Omega$ ,  $C_F = 2.5\text{ pF}$ ,  $V_{CM} = \text{midsupply} - 0.5\text{ V}$ ,  $G = 6\text{ V/V}$  (unless otherwise noted).

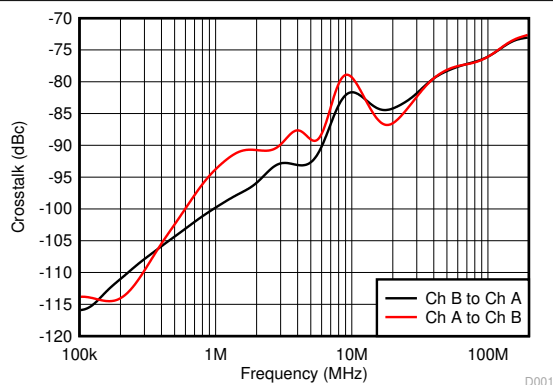


**7-31. Crosstalk vs Frequency**

## 8 Detailed Description

### 8.1 Overview

The OPAx607-Q1 devices are low-noise, rail-to-rail output (RRO) operational amplifiers (op amp). The devices operate from a supply voltage of 2.2 V to 5.5 V. The input common-mode voltage range also extends down to the negative rail allowing the OPAx607-Q1 to be used in most single-supply applications. Rail-to-rail output swing significantly increases dynamic range, especially in low-supply, voltage-range applications, which results in complete usage of the full-scale range of the consecutive analog-to-digital converters (ADCs). The decoupled architecture allows for a favorable tradeoff of low-quiescent current for a very-high gain-bandwidth product (GBW) and low-distortion performance in high-gain applications.

### 8.2 Functional Block Diagram

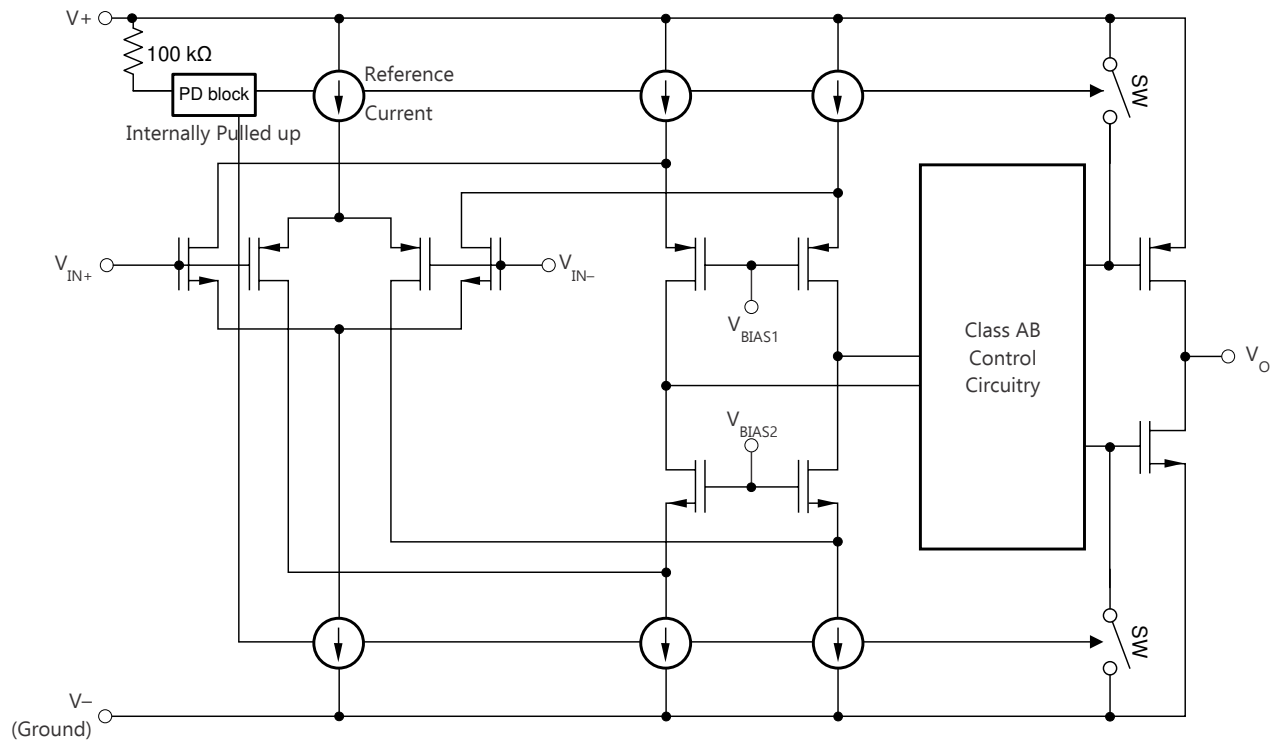


## 8.3 Feature Description

### 8.3.1 Operating Voltage

The OPAx607-Q1 operational amplifiers are fully specified and assured for operation from 2.2 V to 5.5 V, applicable from  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ . The OPAx607-Q1 devices are completely operational with asymmetric, symmetric and single supply voltages applied across the supply pins. The total voltage (that is,  $(V_{S+}) - (V_{S-})$ ) must be less than the supply voltage mentioned in [セクション 7.1](#).


### 8.3.2 Rail-to-Rail Output and Driving Capacitive Loads

Designed as a low-power, low-voltage operational amplifier, the OPAx607-Q1 devices are capable of delivering a robust output drive. For resistive loads of 10 k $\Omega$ , the output swings to within a few millivolts of either supply rail, regardless of the applied power-supply voltage. Different load conditions change the ability of the amplifier to swing close to the rails. The OPAx607-Q1 devices drive up to a nominal capacitive load of 47 pF on the output with no special consideration and without the need of a series isolation resistor  $R_{ISO}$  while still being able to achieve  $45^{\circ}$  of phase margin. When driving capacitive loads greater than 47 pF, TI recommends using  $R_{ISO}$  as shown in [図 8-1](#) in series with the output as close to the device as possible. Refer to [図 7-18](#) for looking up different values of  $R_{ISO}$  required for  $C_L$  to achieve  $45^{\circ}$  phase margin. Without  $R_{ISO}$ , the external capacitance ( $C_L$ ) interacts with the output impedance ( $Z_O$ ) of the amplifier, resulting in stability issues. Inserting  $R_{ISO}$  isolates  $C_L$  from  $Z_O$  and restores the phase margin. [図 8-1](#) shows the test circuit.

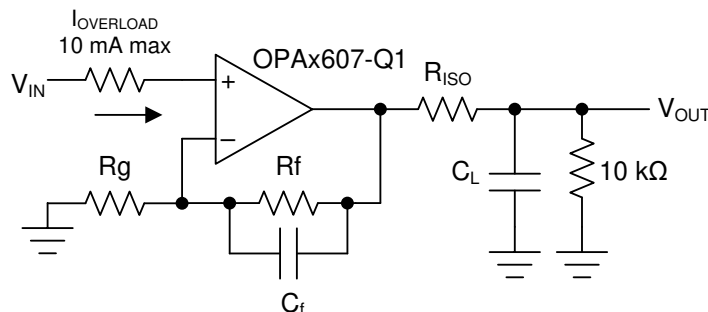


**図 8-1. Input Current Protection and Driving Capacitive Loads**

[図 8-2](#) and [図 8-3](#) show the phase margin achieved with varying  $R_{ISO}$  with different values of  $C_L$ .

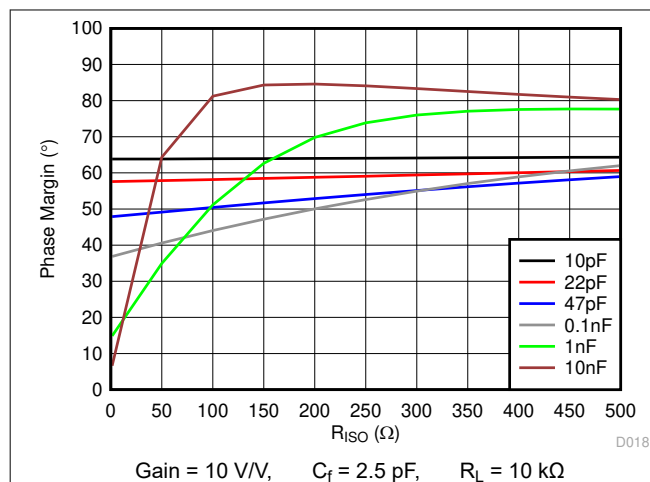

**図 8-2. Phase Margin vs. Series Isolation Resistor**

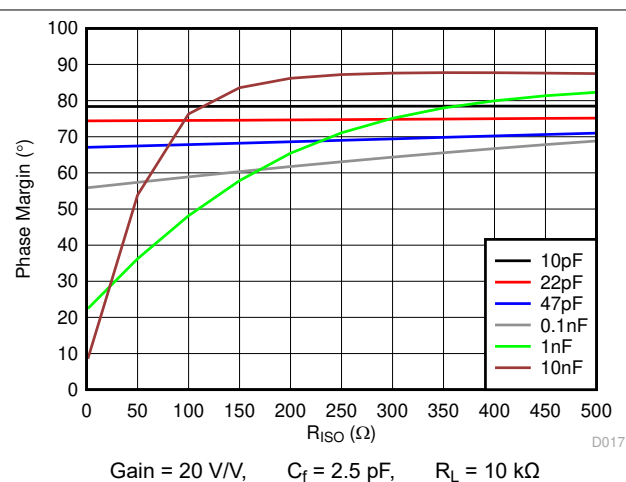


**図 8-3. Phase Margin vs. Series Isolation Resistor**

### 8.3.3 Input and ESD Protection

When the primary design goal is a linear amplifier with high CMRR, do not exceed the op amp input common-mode voltage range ( $V_{CM}$ ). This CMRR is used to set the common-mode input range specifications in [セクション 7.1](#). The typical  $V_{CM}$  specifications for the OPAx607-Q1 devices are from the negative rail to 1.1 V below the positive rail. Assuming the op amp is in linear operation, the voltage difference between the input pins is small (ideally 0 V) and the input common-mode voltage can be analyzed at either input pin; the other input pin is assumed to be at the same potential. The voltage at  $V_{IN+}$  is easy to evaluate. In a noninverting configuration ([図 8-1](#)) the input signal,  $V_{IN+}$ , must not exceed the  $V_{CM}$  rating. However, in an inverting amplifier configuration,  $V_{IN+}$  must be connected to the voltage within  $V_{CM}$ . The input signal applied at  $V_{IN-}$  can be any voltage, such that the output voltage swings with a headroom of 10 mV from either of the supply rails.

The input voltage limits have fixed headroom to the power rails and track the power-supply voltages. For single 5-V supply, the linear input voltage range is 0 V to 3.9 V and with a 2.2-V supply this range is 0 V to 1.1 V. The headroom to each power-supply rail is the same in either case: 0 V and 1.1 V. A weak NMOS input pair from  $V_{IN+}$  to  $V_{IN+} - 1.1$  V ensures that an output phase reversal issue does not occur when the  $V_{CM}$  is violated.

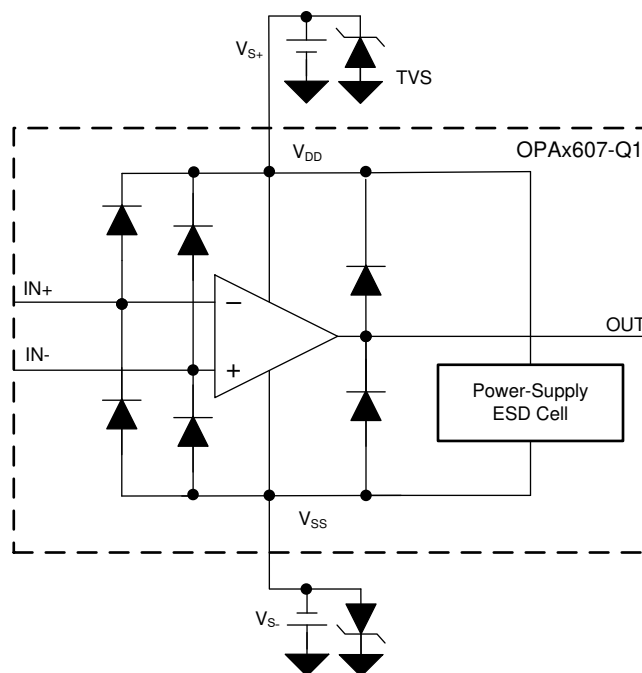

**図 8-4. Internal ESD Structure**


The OPAx607-Q1 devices also incorporate internal electrostatic discharge (ESD) protection circuits on all pins. For the input and output pins, this protection primarily consists of current-steering diodes connected between the input and power-supply pins. These ESD protection diodes provides input overdrive protection, as long as the current is limited with a series resistor to 10 mA, as stated in [セクション 7.1](#). [図 8-1](#) shows a series input resistor can be added to the driven input to limit the input current.



### 8.3.4 Decompensated Architecture with Wide Gain-Bandwidth Product

Amplifiers such as the OPAX607-Q1 devices are not unity-gain stable and are referred to as *decompensated amplifiers*. The decompensated architecture typically allows for higher GBW, higher slew rate, and lower noise compared to a unity-gain stable amplifier with similar quiescent currents. The increased available bandwidth reduces the rise time and the settling time of the op amp, allowing for sampling at faster rates in an ADC-based signal chain.

As shown in Figure 8-5, the dominant pole  $f_d$  is moved to the frequency  $f_1$  in the case of a decompensated op amp. The solid  $A_{OL}$  plot is the open-loop gain plot of a traditional unity-gain stable op amp. The change in internal compensation in a decompensated amp such as the OPAX607-Q1, increase the bandwidth for the same amount of power. That is, the decompensated op amp has an increased bandwidth to power ratio when compared to a unity-gain stable op amp of equivalent architecture. Besides the advantages in the above mentioned parameters, an increased slew rate and a better distortion (HD2 and HD3) value is achieved because of the higher available loop-gain, compared to its unity-gain counterpart. The most important factor to consider is ensuring that the op amp is in a noise gain (NG) greater than  $G_{min}$ . A value of NG lower than  $G_{min}$  results in instability, as shown in Figure 8-5, because the  $1/\beta$  curve intersects the  $A_{OL}$  curve at 40 dB/decade. This method of analyzing stability is called the *rate of closure method*. See the [precision lab training videos](#) from TI for a better understanding on device stability and for different techniques of ensuring stability.

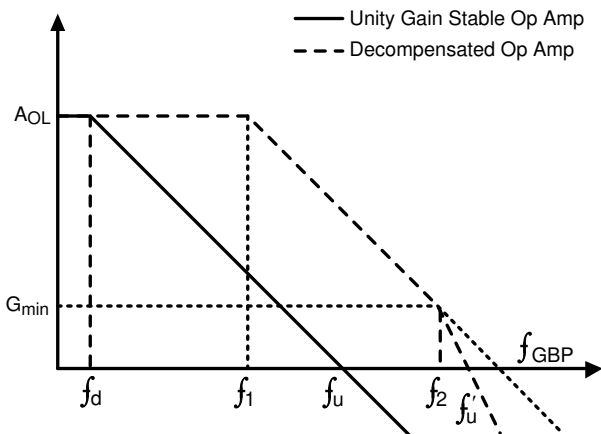

**Figure 8-5. Gain vs Frequency Characteristics for a Unity-Gain Stable Op Amp and a Decompensated Op Amp**


The OPAX607-Q1 devices are stable in a noise gain of 6 V/V (15.56 dB) or higher in conventional gain circuits; see Figure 8-6. The device has 9 MHz of small-signal bandwidth (SSBW) in this gain configuration with approximately 65° of phase margin. The high GBW and low voltage noise of the OPAX607-Q1 devices make them suitable for general-purpose, high-gain applications.

## 8.4 Device Functional Modes

The Automotive grade of the OPAx607-Q1 family has only one functional modes: normal operating mode. The PD mode exists only in some of the packages made available in the industrial grade of the OPAx607-Q1 family.

### 8.4.1 Normal Operating Mode

The OPAx607-Q1 devices are operational when the power-supply voltage is between 2.2 V ( $\pm 1.1$  V) and 5.5 V ( $\pm 2.75$  V). Most newer systems use a single power supply to improve efficiency and simplify the power tree design. The OPAx607-Q1 devices can be used with a single-supply power ( $V_{S-}$  connected to GND) with no change in performance from split supply, as long as the input and output pins are biased within the linear operating region of the device. The valid input and output voltage ranges are given in [セクション 7.5](#). The outputs nominally swing rail-to-rail with approximately 10-mV headroom required for linear operation. The inputs can typically swing up to the negative rail (typically ground) and to within 1.1 V from the positive supply. [図 8-6](#) shows changing from a  $\pm 2.5$ -V split supply to a 5-V single-supply.

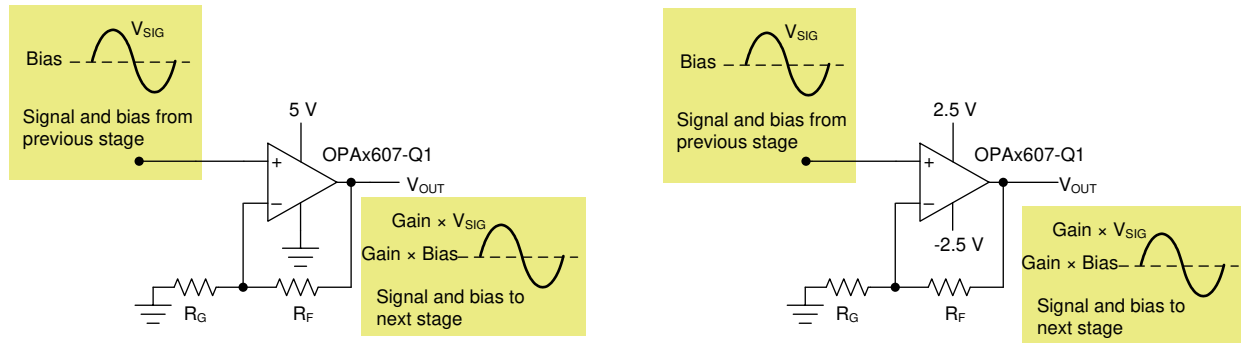

**图 8-6. Single-Supply and Dual-Supply Operation**

## 9 Application and Implementation

### Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.


### 9.1 Application Information

The OPAx607-Q1 devices feature a 50-MHz GBW with 900  $\mu\text{A}$  of supply current, providing good AC performance at low-power consumption. The low input noise voltage of  $3.8 \text{ nV}/\sqrt{\text{Hz}}$ , the approximate pA of bias current, and a typical input offset voltage of 0.1 mV make the device very suitable for both AC and DC applications.

### 9.2 Typical Applications

#### 9.2.1 100-k $\Omega$ Gain Transimpedance Design

The high GBW and low input voltage and current noise for the OPAx607-Q1 devices make it an excellent wideband transimpedance amplifier for moderate to high transimpedance gains.

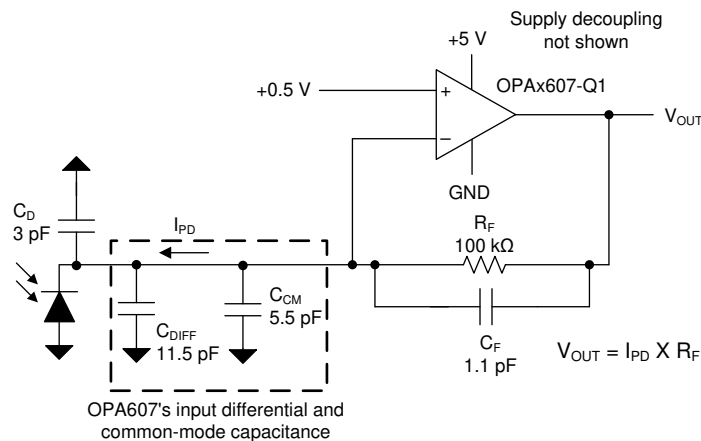

**图 9-1. Wideband, High-Sensitivity, Transimpedance Amplifier**

#### 9.2.1.1 Design Requirements

Design a high-bandwidth, high-transimpedance-gain amplifier with the design requirements shown in 表 9-1.

**表 9-1. Design Requirements**

| TARGET BANDWIDTH (MHz) | TRANSIMPEDANCE-GAIN (k $\Omega$ ) | PHOTODIODE CAPACITANCE (pF) |
|------------------------|-----------------------------------|-----------------------------|
| 2                      | 100                               | 3                           |

### 9.2.1.2 Detailed Design Procedure


Designs that require high bandwidth from a large area detector with relatively high transimpedance-gain benefit from the low input voltage noise of the OPAX607-Q1 devices. Use the Excel™ calculator available at [What You Need To Know About Transimpedance Amplifiers – Part 1](#) to help with the component selection based on total input capacitance and  $C_{TOT}$ .  $C_{TOT}$  is referred as  $C_{IN}$  in the calculator.  $C_{TOT}$  is the sum of  $C_D$ ,  $C_{DIFF}$ , and  $C_{CM}$  which is 20 pF. Using this value of  $C_{TOT}$ , and the targeted closed-loop bandwidth ( $f_{-3dB}$ ) of 2 MHz and transimpedance gain of 100 kΩ results in amplifier GBW of approximately 50 MHz and a feedback capacitance ( $C_F$ ) of 1.1 pF as shown in [Figure 9-2](#). These results are for a Butterworth response with a  $Q = 0.707$  and a phase margin of approximately 65° which corresponds to 4.3% overshoot.

| Calculator II                            |        |      |
|--|--------|------|
| Closed-loop TIA Bandwidth ( $f_{-3dB}$ ) | 2.00   | MHz  |
| Feedback Resistance ( $R_F$ )            | 100.00 | kOhm |
| Input Capacitance ( $C_{IN}$ )           | 20.00  | pF   |
| Opamp Gain Bandwidth Product (GBP)       | 50.27  | MHz  |
| Feedback Capacitance ( $C_F$ )           | 1.110  | pF   |

**Figure 9-2. Results of Inputting Design Parameters in the TIA Calculator**


The OPA607-Q1's 50 MHz GBW, is suitable for the above design requirements. If the required feedback capacitance  $C_F$  comes out to be a very low value capacitor to be practically achievable, a T-Network capacitor circuit as shown below can be used. A very low capacitor value ( $C_{EQ}$ ) can be achieved between Port<sub>1</sub> and Port<sub>2</sub> using standard value capacitors in a T-Network circuit as shown in [Figure 9-3](#).

$$C_{EQ} = \frac{C_1 \times C_2}{C_1 + C_2 + C_T} \quad (1)$$




**Figure 9-3. T-Network**

### 9.2.1.3 Application Curves

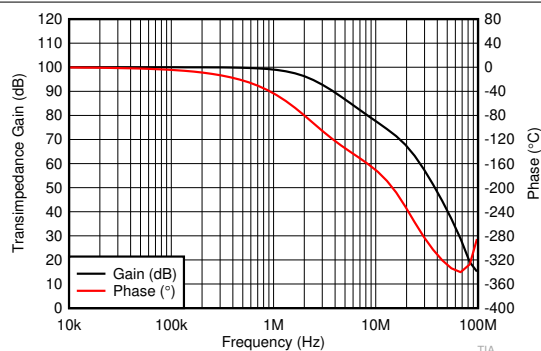

**Figure 9-4. Simulated Closed-Loop Bandwidth of TIA**

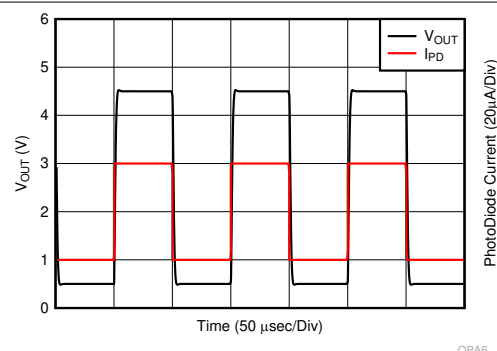


**Figure 9-5. Simulated Time Domain Response**

## 9.2.2 Noninverting Gain of 3 V/V

The OPAx607-Q1 devices are normally stable in noise gain configurations (see [SBOA066](#)) of greater than 6 V/V when conventional feedback networks are used, which is discussed in [セクション 8.3.4](#). The OPAx607-Q1 devices can be configured in noise gains of less than 6 V/V by using capacitors in the feedback path and between the inputs to maintain the desired gain at lower frequencies and increase the gain greater than 6 V/V at higher frequencies such that the amplifier is stable. Configuration (a) in [図 9-6](#) shows OPAx607-Q1 devices configured in a gain of 3 V/V by using capacitors and resistors to shape the noise gain and achieve a phase margin of approximately 56° that is very close to the phase margin achieved for the conventional 6 V/V configuration (b) in [図 9-6](#).

The key benefit of using a decompensated amplifier (such as the OPAx607-Q1) below the minimum stable gain, is that it takes advantage of the low noise and low distortion performance at quiescent powers smaller than comparable unity-gain stable architectures. By reducing the 100-pF input capacitor, higher closed-loop bandwidth can be achieved at the expense of increased peaking and reduced phase margin. Ensure that low parasitic capacitance layout techniques on the IN– pin are as small as 1 pF to 2 pF of parasitic capacitance on the inverting input, which will require tweaking the noise-shaping component values to get a flat frequency response and the desired phase margin. Configurations in [図 9-6](#) does not take into account this parasitic capacitance but it must be considered for practical purposes. Details on the benefits of decompensated architectures are discussed in [Using a decompensated op amp for improved performance](#). The *one-capacitor, externally compensated type* method is used for noise gain shaping in the below circuit.

In a difference amplifier circuit, typically used for low side current sensing applications, the (noise gain) = (signal gain + 1).

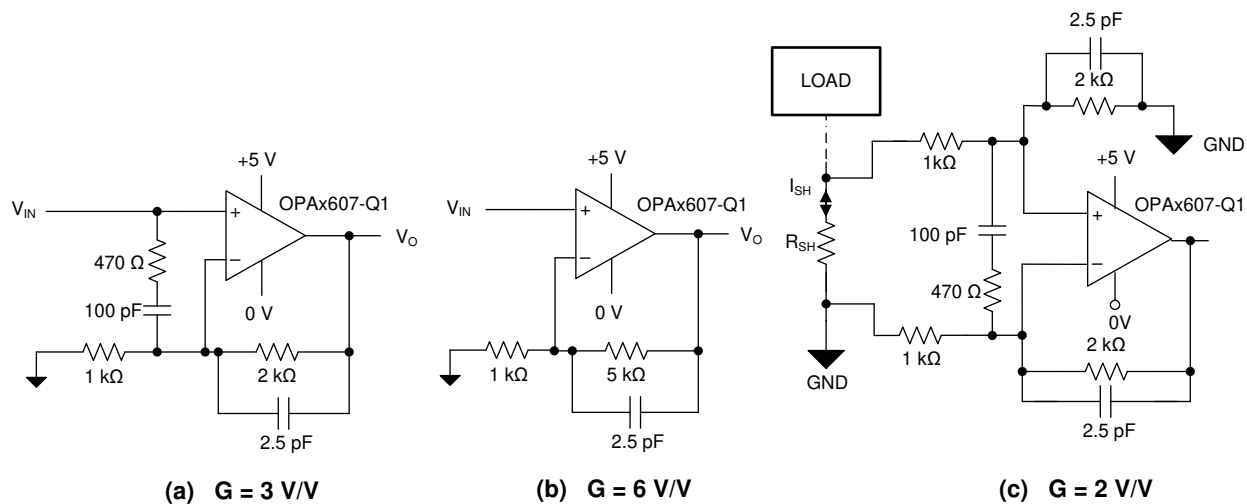

**図 9-6. Noninverting Gain of 3 V/V, 6 V/V Configurations, and Difference Amplifier in Signal Gain of 2 V/V**

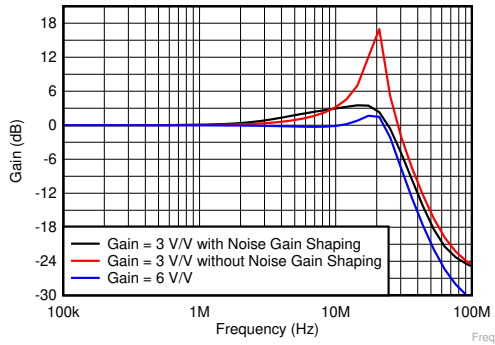


Figure 9-7. Small-Signal Frequency Response in Gains of 3V/V (a) and 6V/V (b)

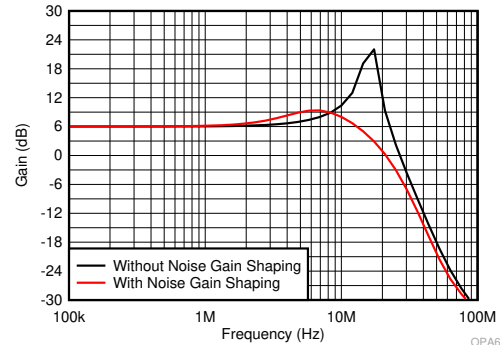


Figure 9-8. Small-Signal Frequency Response of Difference Amplifier (c) With and Without Noise Gain Shaping

### 9.2.3 High-Input Impedance (Hi-Z), High-Gain Signal Front-End

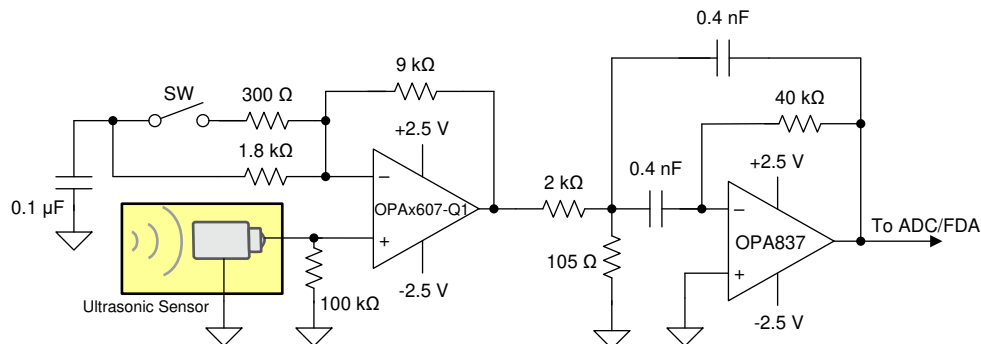


Figure 9-9. Hi-Z, High-Gain Front-End Circuit

#### 9.2.3.1 Design Requirements

The objective is to design a high-input impedance, high-dynamic range, signal-conditioning front-end. An example application for such a front-end circuit is the receive signal chain in an ultrasonic-based end equipment (EE) such as fish finders, printers and flow meters. Table 9-2 lists the design requirements for this application.

Table 9-2. Design Parameters



| PARAMETER                     | DESIGN REQUIREMENT |
|-------------------------------|--------------------|
| Amplifier supply              | ±2.5 V             |
| Input signal frequency        | 200 kHz            |
| Minimum voltage               | 300 $\mu$ Vrms     |
| Minimum SNR at 300 $\mu$ Vrms | 40 dB              |

### 9.2.3.2 Detailed Design Procedure

To achieve a SNR of greater than 40 dB for signals from 300  $\mu$ Vrms to 30 mV the front-end stage has two gain settings: 6 V/V and 31 V/V. The SW (switch, relay, or analog mux) can be dynamically toggled to ensure maximum sensitivity to the receiving signal. The OPAX607-Q1 devices prove to be an attractive solution for this front-end signal chain because of the right balance of low noise and high input impedance. The ultrasonic sensors (for example, piezo crystal) have high output impedance. The OPAX607-Q1 devices have an input bias current of 20 pA (maximum). This small bias current results in reduced distortion and signal loss across the source impedance when compared with a bipolar amplifier with input bias currents in the range of a few hundreds of nano-amperes. The OPAX607-Q1's high-gain front-end is followed by a narrowband band-pass filter that is tuned to a 200-kHz center frequency. The narrowband filter is designed using the OPA837. OPA837 can be used as a variable gain mux / PGA as shown in TIDA-01565. In this application section the OPA837-based band-pass filter was designed using the techniques mentioned in the [Filter Design in Thirty Seconds application report](#).

Figure 9-11 shows the frequency response of circuit in Figure 9-9. As shown in Figure 9-11, the frequency response is a high-Q factor band-pass filter centered around 200 kHz. Designing such a high-Q band-pass filter helps eliminate white band noise along with other interferences present in the circuitry, resulting in a high SNR signal chain. The OPAX607-Q1's front-end combined with the OPA837-based band-pass filter help to achieve a total gain of 33 dB (44 V/V) or 50 dB (316 V/V) based on the SW (switch) position.

### 9.2.3.3 Application Curves

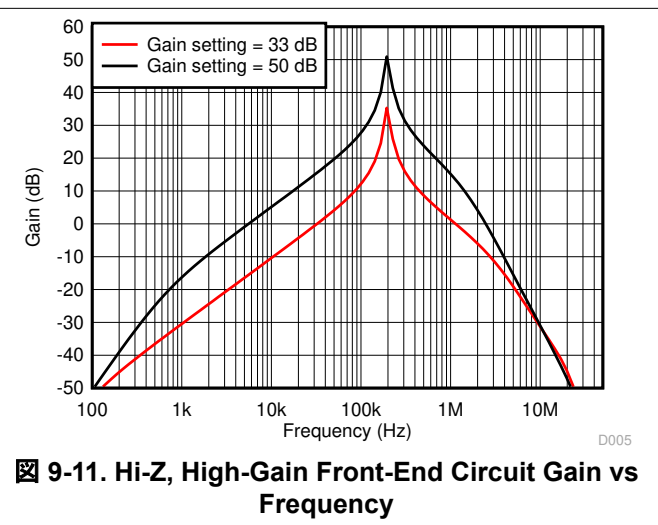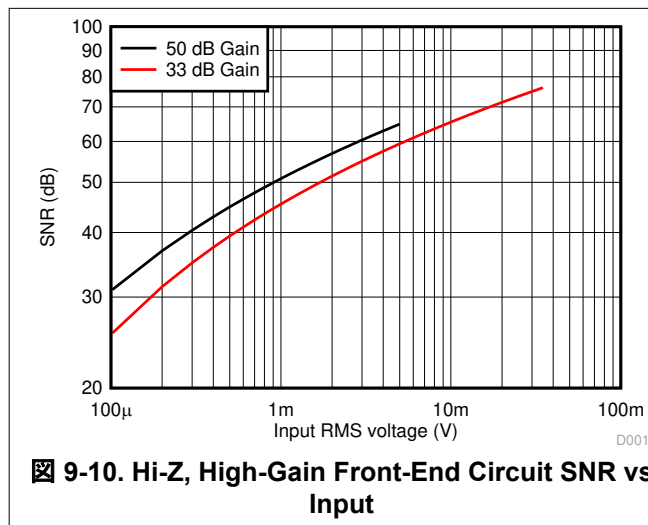

## 9.2.4 Low-Cost, Low Side, High-Speed Current Sensing

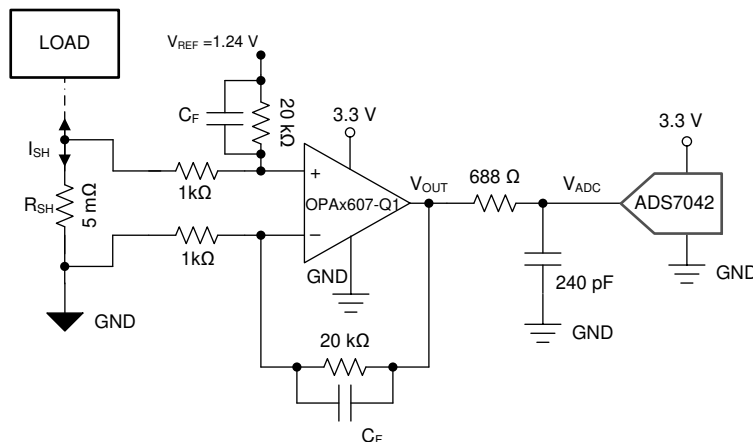


图 9-12. Low Side Current Sensing

### 9.2.4.1 Design Requirements

The objective is to design a high-speed, high-gain bidirectional current-sensing circuit for power systems and motor drive systems. セクション 9.2.4.2 lists the design requirements of this application.

表 9-3. Design Parameters

| PARAMETER                                       | DESIGN REQUIREMENT |
|---|--------------------|
| Amplifier and ADC supply                        | 3.3 V              |
| Peak current to be measured from load to ground | 20 A               |
| Peak current to be measured from ground to load | 12 A               |
| Required Accuracy of current measurement        | 0.1%               |
| Signal-Setting time at ADC input                | < 1 μs             |
| Current sensing direction                       | Bidirectional      |

### 9.2.4.2 Detailed Design Procedure

The aim of this application section is to measure bidirectional current with relatively high accuracy in a low-side-sensing-based, high-frequency switching system.

As shown in 图 9-12, a single op amp of high bandwidth is capable of sensing current in a high gain configuration as well as have the required effective bandwidth to drive the consecutive SAR ADC input. The SAR ADC can be a standalone ADC or integrated inside a Micro-controller.

$$V_{OUT} = (20 \text{ k}\Omega / 1 \text{ k}\Omega \times V_{DIFF}) + V_{REF}, \text{ where } V_{DIFF} = I_{SH} \times R_{SH} \quad (2)$$

The reference voltage is 1.24 V. When the  $I_{SH}$  flowing across  $R_{SH}$  equals zero, the  $V_{OUT}$  of the difference amplifier sits ideal at 1.24 V.

When the current ( $I_{SH}$ ) flows from LOAD to GND, the output of the OPAx607-Q1 increase above 1.24 V with a value equal to  $20 \times V_{SH}$  and when the current flows from GND to LOAD (in the opposite direction) the output of the OPAx607-Q1 decrease below 1.24 V with a value proportional to  $20 \times V_{SH}$ .

One of the main challenges in a high speed current sensing design is to choose an op amp of with sufficient GBW that can drive a SAR ADC, while still being able to gain the signal by the required amount. The 0.1% and 0.01% settling of OPAx607-Q1 can found in セクション 7.5. Another key care about is to ensure the op amp output rises in less than 1 μs so as to feed the output to a comparator for short-circuit protection. This comparator based short circuit protection loop is extremely fast and enables to turn off the switching devices very quickly. This requirement makes a low cost high speed part like the OPAx607-Q1 very desirable in a current-sensing circuit. Equation of the rise time as a function of bandwidth is shown below.





$$t_R \text{ (10\% to 90\%)} = 0.35 \text{ Hz / BW} \quad (3)$$

For an ADC like ADS7042 running at a sampling rate of 500 kSPS of a clock of 12.5 MHz, the effective bandwidth of the op amp required to drive such an ADC is approximately 2.7 MHz. See the [TI precision lab](#) videos on driving SAR ADCs to understand the underlying calculation. The OPAx607-Q1 has a GBW of 50 MHz. With a gain of 20 V/V, the closed loop bandwidth turns out to approximately 2.5 MHz, making this device the most suitable, cost-optimized amplifier for this application. The RC charge bucket (240  $\Omega$  and 688 pF in [Figure 9-12](#)) designed at the input of the SAR ADC is derived from the calculations provided in the SAR ADC precision lab videos. The fundamental concept behind the design of this charge bucket filter is to ensure that the sample and hold capacitor is charged to the required final voltage within the acquisition window of the ADC.

As shown in [Figure 9-14](#), a DC accuracy of higher than 0.05% is achieved with the OPAx607-Q1. The simulations are captured with and without voltage offset calibration. Frequency response shown in [Figure 9-13](#) indicate different signal bandwidth at  $V_{OUT}$ ,  $V_{ADC}$  and with and without  $C_F$  of 220 pF.

### 9.2.4.3 Application Curves

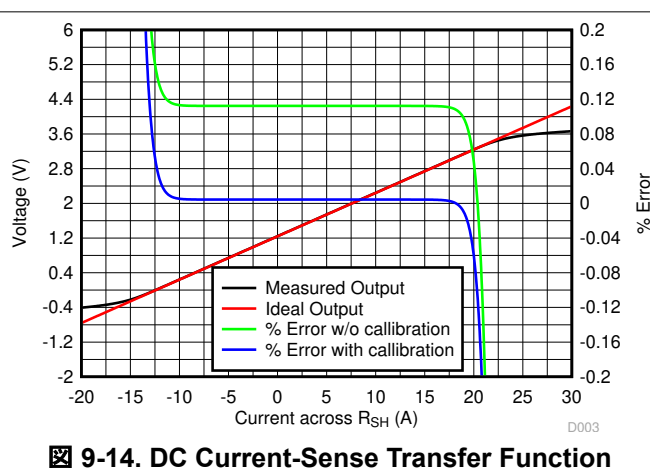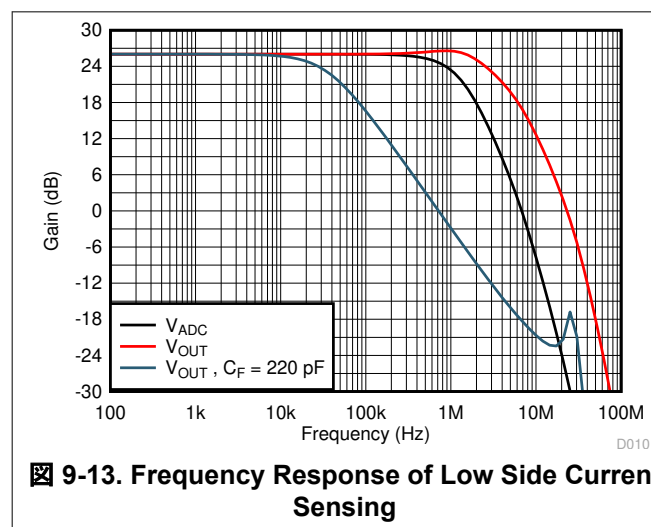

## 10 Power Supply Recommendations

The OPAx607-Q1 devices are specified for operation from 2.2 V to 5.5 V ( $\pm 1.1$  V to  $\pm 2.75$  V), applicable from  $-40^\circ\text{C}$  to  $+125^\circ\text{C}$ . Place 0.1- $\mu\text{F}$  bypass capacitors close to the power-supply pins to reduce errors coupling in from noisy or high-impedance power supplies.

### CAUTION

Supply voltages larger than 6 V can permanently damage the device (see [セクション 7.1](#)).

For more detailed information on bypass capacitor placement, see [セクション 11.1](#).


## 11 Layout

### 11.1 Layout Guidelines


For best operational performance of the device, use good printed circuit board (PCB) layout practices, including:

- Noise can propagate into analog circuitry through the power-supply pins of the circuit as a whole and of the operational amplifier. Bypass capacitors are used to reduce the coupled noise by providing low-impedance power sources local to the analog circuitry.
  - Connect low-equivalent series resistance (ESR), 0.1- $\mu$ F ceramic bypass capacitors between each supply pin and ground, placed as close to the device as possible. A single bypass capacitor from V+ to ground is applicable for single-supply applications.
- Separate grounding for analog and digital portions of the circuitry is one of the simplest and most effective methods of noise suppression. One or more layers on multilayer PCBs are usually devoted to ground planes. A ground plane helps distribute heat and reduces electromagnetic interference (EMI) noise pickup. Make sure to physically separate digital and analog grounds, paying attention to the flow of the ground current.
- To reduce parasitic coupling, run the input traces as far away from the supply or output traces as possible. If these traces cannot be kept separate, crossing the sensitive trace perpendicularly is much better than crossing in parallel with the noisy trace.
- Place the external components as close to the device as possible. Keeping  $R_F$  and  $R_G$  close to the inverting input minimizes parasitic capacitance; see [Figure 11-1](#) and [Figure 11-2](#).
- Keep the length of input traces as short as possible. Always remember that the input traces are the most sensitive part of the circuit.
- Consider a driven, low-impedance guard ring around the critical traces. A guard ring can significantly reduce leakage currents from nearby traces that are at different potentials.

### 11.2 Layout Examples

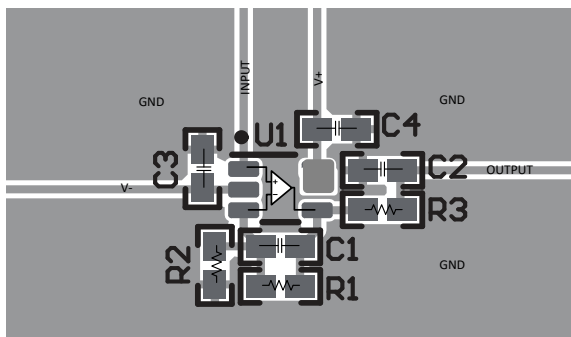

**Figure 11-1. Operational Amplifier Board Layout for a Noninverting Configuration**

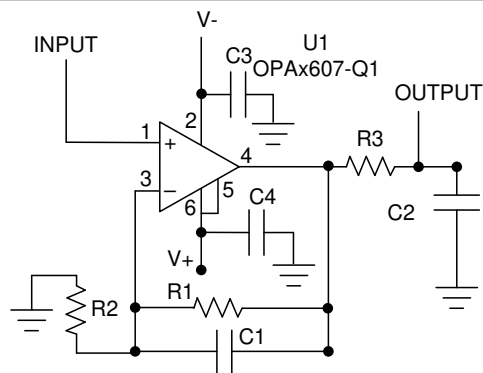

**Figure 11-2. Layout Example Schematic**

## 12 Device and Documentation Support

### 12.1 Device Support

#### 12.1.1 Development Support

- Texas Instruments, [precision lab videos](#)

### 12.2 Documentation Support

#### 12.2.1 Related Documentation

For related documentation see the following:

- Texas Instruments, [ADS7042 Ultra-Low Power, Ultra-Small Size, 12-Bit, 1-MSPS, SAR ADC data sheet](#)
- Texas Instruments, [Filter Design in Thirty Seconds application report](#)
- Texas Instruments, [OPA2834 50-MHz, 170-μA, Negative-Rail In, Rail-to-Rail Out, Voltage-Feedback Amplifier data sheet](#)
- Texas Instruments, [OPAx836 Very-Low-Power, Rail-to-Rail Out, Negative Rail In, Voltage-Feedback Operational Amplifiers data sheet](#)
- Texas Instruments, [Ultrasonic Sensing Subsystem Reference Design For Gas Flow Measurement design guide](#)

### 12.3 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 12.4 サポート・リソース

TI E2E™ サポート・フォーラムは、エンジニアが検証済みの回答と設計に関するヒントをエキスパートから迅速かつ直接得ることができる場所です。既存の回答を検索したり、独自の質問をしたりすることで、設計に必要な支援を迅速に得ることができます。

リンクされているコンテンツは、該当する貢献者により、現状のまま提供されるものです。これらは TI の仕様を構成するものではなく、必ずしも TI の見解を反映したものではありません。TI の[使用条件](#)を参照してください。

### 12.5 Trademarks

Excel™ is a trademark of Microsoft Corporation.

TI E2E™ is a trademark of Texas Instruments.

すべての商標は、それぞれの所有者に帰属します。

### 12.6 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 12.7 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

## 13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2) | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| OPA2607QDGKRQ1   | ACTIVE        | VSSOP        | DGK                | 8    | 2500           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 2FST                    | <a href="#">Samples</a> |
| OPA607QDBVRQ1    | ACTIVE        | SOT-23       | DBV                | 5    | 3000           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 6QBV                    | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF OPA2607-Q1, OPA607-Q1 :**

- Catalog : [OPA2607](#), [OPA607](#)

**NOTE:** Qualified Version Definitions:

- Catalog - TI's standard catalog product

**DGK0008A****PACKAGE OUTLINE****VSSOP - 1.1 mm max height**

SMALL OUTLINE PACKAGE



4214862/A 04/2023

**NOTES:**

PowerPAD is a trademark of Texas Instruments.

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-187.

# EXAMPLE BOARD LAYOUT

DGK0008A

™ VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE



LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 15X



SOLDER MASK DETAILS

4214862/A 04/2023

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
9. Size of metal pad may vary due to creepage requirement.

# EXAMPLE STENCIL DESIGN

DGK0008A

™ VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE



SOLDER PASTE EXAMPLE  
SCALE: 15X

4214862/A 04/2023

NOTES: (continued)

11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
12. Board assembly site may have different recommendations for stencil design.






# EXAMPLE BOARD LAYOUT


DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

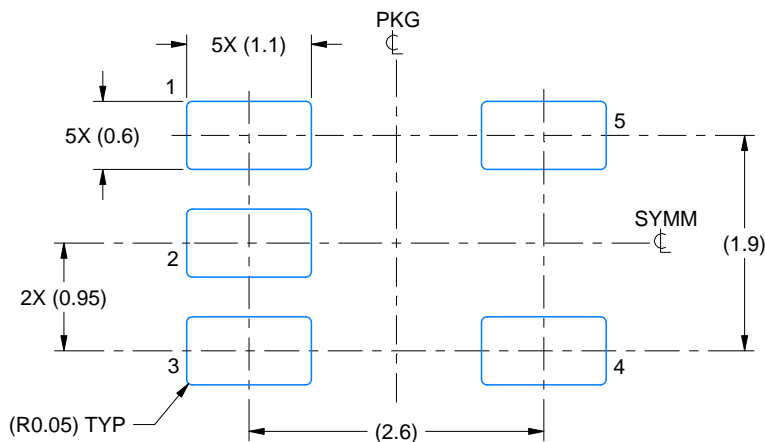

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:15X

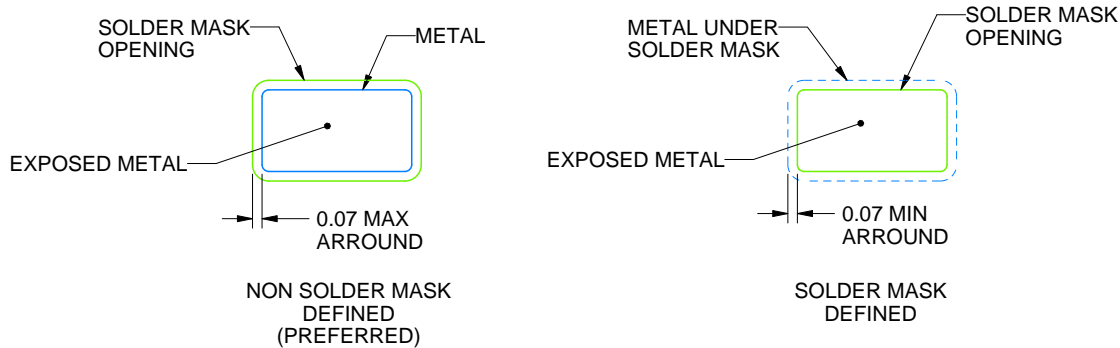

SOLDER MASK DETAILS

4214839/J 02/2024

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR



SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE:15X

4214839/J 02/2024

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

## 重要なお知らせと免責事項

TI は、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス・デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとし、

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、[TI の販売条件](#)、または [ti.com](#) やかかる TI 製品の関連資料などのいずれかを通じて提供する適用可能な条項の下で提供されています。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。

お客様がいかなる追加条項または代替条項を提案した場合でも、TI はそれらに異議を唱え、拒否します。

郵送先住所 : Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2024, Texas Instruments Incorporated