



OPA355-Q1 200MHz、シャットダウン機能付きCMOSオペアンプ

1 特長

- 車載アプリケーションに対応
- 下記内容でAEC-Q100認定済み
 - デバイス温度グレード 1: 動作時周囲温度 $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
 - デバイスHBM ESD分類レベル2
 - デバイスCDM ESD分類レベルC4B
- ユニティ・ゲイン帯域幅: 450MHz
- 広い帯域幅: 200MHz GBW
- 高いスルー・レート: $360\text{V}/\mu\text{s}$
- 低ノイズ: $5.8\text{nV}/\sqrt{\text{Hz}}$
- 非常に優れたビデオ性能
 - 差動ゲイン: 0.02%
 - 差動位相: 0.05° (0.1dB)
 - ゲイン・フラットネス: 75MHz
- 入力範囲にグラウンドを含む
- レール・ツー・レール出力(100mV以内)
- 低い入力バイアス電流: 3pA
- 低いシャットダウン時電流: 3.4 μA
- イネーブル/ディセーブル時間: 100ns/30ns
- サーマル・シャットダウン
- 単一電源動作電圧範囲: 2.5V $\sim$ 5.5V
- MicroSIZEパッケージ

2 アプリケーション

- 車載用
- アクティブ・フィルタ
- 高速積分器
- A/Dコンバータ(ADC)入力バッファ
- D/Aコンバータ(DAC)出力アンプ

3 概要

OPA355-Q1デバイスは高速の電圧帰還CMOSオペアンプで、広い帯域幅を必要とするアプリケーション用に設計されています。OPA355-Q1デバイスはユニティ・ゲイン安定で、大きな出力電流を駆動できます。さらに、OPA355-Q1デバイスにはデジタル・シャットダウン(イネーブル)機能があります。この機能により、アイドル時の省電力を実現し、出力をハイ・インピーダンス状態にして出力多重化をサポートします。差動ゲインは0.02%、差動位相は 0.05° です。静止電流はチャンネルごとに8.3mAです。


OPA355-Q1デバイスは、最低2.5V ($\pm 1.25\text{V}$)、最高5.5V ($\pm 2.75\text{V}$)のシングル電源またはデュアル電源で動作するよう最適化されています。OPA355-Q1デバイスの同相入力範囲はグラウンドより100mV下、V+より1.5V上まで伸びています。出力スイングはレールから100mV以内で、広いダイナミック・レンジに対応しています。

OPA355-Q1デバイスは単一のSOT-23-6パッケージで供給され、 $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$ の拡張温度範囲で動作が規定されています。

製品情報⁽¹⁾

型番	パッケージ	本体サイズ(公称)
OPA355-Q1	SOT-23 (6)	2.90mm $\times$ 1.60mm

(1) 提供されているすべてのパッケージについては、データシートの末尾にある注文情報を参照してください。



目次

1	特長	1	8.2	Functional Block Diagram	12
2	アプリケーション	1	8.3	Feature Description	12
3	概要	1	8.4	Device Functional Modes	13
4	改訂履歴	2	9	Application and Implementation	14
5	Device Comparison Table	3	9.1	Application Information	14
5.1	Device Comparison Table	3	9.2	Typical Applications	14
6	Pin Configuration and Functions	3	10	Power Supply Recommendations	19
7	Specifications	4	11	Layout	19
7.1	Absolute Maximum Ratings	4	11.1	Layout Guidelines	19
7.2	ESD Ratings	4	11.2	Layout Example	19
7.3	Recommended Operating Conditions	4	12	デバイスおよびドキュメントのサポート	20
7.4	Thermal Information	4	12.1	商標	20
7.5	Electrical Characteristics	5	12.2	静電気放電に関する注意事項	20
7.6	Typical Characteristics	7	12.3	Glossary	20
8	Detailed Description	12	13	メカニカル、パッケージ、および注文情報	20
8.1	Overview	12			

4 改訂履歴

Revision B (June 2014) から Revision C に変更

Page

• Deleted "C55" marking on pinout drawing in <i>Pin Configuration and Functions</i> section	3
• Added Pin Functions table to <i>Pin Configuration and Functions</i> section	3
• Deleted storage temperature range from <i>ESD Ratings</i> table and moved to <i>Absolute Maximum Ratings</i> table	4
• Changed title of <i>Handling Ratings</i> table to <i>ESD Ratings</i> table	4
• Added <i>Recommended Operating Conditions</i> table	4
• 追加 <i>Functional Block Diagram</i>	12
• 削除 "Independent enable pins are available for each channel, which provide maximum design flexibility" from <i>Enable Function</i> section	12
• 削除 <i>Input and ESD Protection</i> subsection in <i>Feature Description</i> section	13
• 追加 <i>Device Functional Modes</i> section	13
• 追加 <i>Typical Applications</i> section to <i>Application and Implementation</i> section	14
• 追加 <i>Design Requirements</i> subsection to <i>Typical Applications</i> section	14
• 追加 <i>Detailed Design Procedure</i> subsection to <i>Typical Application</i> section	14
• 追加 application curves to the <i>Typical Application</i> section	16
• 追加 <i>High-Impedance Sensor Interface</i> , <i>Driving ADCs</i> , and <i>Active Filter</i> subsections to <i>Typical Application</i> section	16
• 追加 <i>Power Supply Recommendations</i> section	19
• 追加 layout example image to <i>Layout</i> section	19

Revision A (December 2013) から Revision B に変更

Page


• デバイスのステータスを「製品プレビュー」から「量産データ」に変更	1
--	---

5 Device Comparison Table

5.1 Device Comparison Table

OPA355-Q1 RELATED PRODUCTS	FEATURES
OPA356	200-MHz, Rail-to-Rail Output, CMOS, No Shutdown
OPAx350	38-MHz, Rail-to-Rail Input and Output, CMOS
OPAx631	75-MHz, Rail-to-Rail Output
OPAx634	150-MHz, Rail-to-Rail Output
THS412x	Differential Input and Output, 3.3-V Supply

6 Pin Configuration and Functions

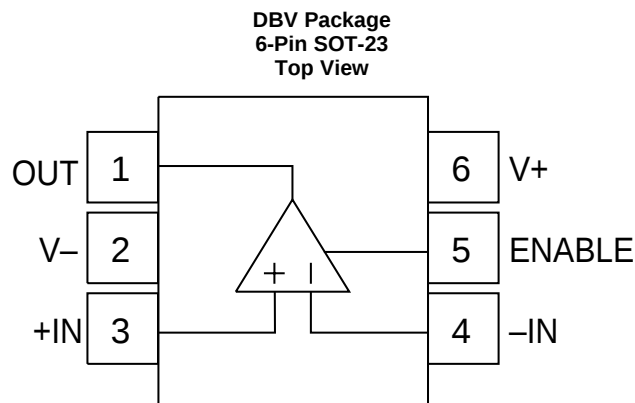

Pin 1 of the SOT-23-6 is determined by orienting the package marking as indicated in the diagram.

Pin Functions

PIN		I/O	DESCRIPTION
NAME	NO.		
ENABLE	5	—	Amplifier power down. Low = disabled, high = normal operation (pin must be driven) .
IN+	3	I	Noninverting input pin
IN–	4	I	Inverting input pin
OUT	1	O	Output pin
V+	6	—	Positive power supply
V–	2	—	Negative power supply

7 Specifications

7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

		MIN	MAX	UNIT
Supply voltage	V+ to V–		7.5	V
Signal input terminals	Voltage	(V–) – 0.5	(V+) + 0.5	V
	Current		10	mA
Output short circuit ⁽²⁾		Continuous		
Operating temperature		–55	150	°C
Junction temperature			160	°C
Lead temperature (soldering, 10 seconds)			300	°C
Storage temperature range, T _{stg}		–65	150	°C

- (1) Stresses above *Absolute Maximum Ratings* may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those specified is not implied.
- (2) Short-circuit to ground, one amplifier per package.

7.2 ESD Ratings

			MIN	MAX	UNIT
V _(ESD) Electrostatic discharge	Human body model (HBM), per AEC Q100-002 ⁽¹⁾			2000	V
	Charged device model (CDM), per AEC Q100-011	Corner pins (1, 3, 4, and 6)		750	
		Other pins		500	

- (1) AEC Q100-002 indicates HBM stressing is done in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

	MIN	NOM	MAX	UNIT
V _S Total supply voltage	2.7		5.5	V
T _A Ambient temperature	–40	25	125	°C

7.4 Thermal Information

THERMAL METRIC ⁽¹⁾		OPA355-Q1	UNIT
		DBV (SOT-23)	
		6 PINS	
R _{θJA}	Junction-to-ambient thermal resistance	187.3	°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance	126.5	°C/W
R _{θJB}	Junction-to-board thermal resistance	32.6	°C/W
ψ _{JT}	Junction-to-top characterization parameter	24.1	°C/W
ψ _{JB}	Junction-to-board characterization parameter	32.1	°C/W
R _{θJC(bot)}	Junction-to-case (bottom) thermal resistance	N/A	°C/W

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

7.5 Electrical Characteristics

$V_S = 2.7\text{ V}$ to 5.5 V (single-supply). At $T_A = 25^\circ\text{C}$, $R_F = 604\ \Omega$, $R_L = 150\ \Omega$, and connected to $V_S / 2$, (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
OFFSET VOLTAGE							
V _{OS}	Input offset voltage	V _S = 5 V	T _A = 25°C	±2		±9	mV
			T _A = −40°C to +125°C			±15	
DV _{OS} /dT	Input offset voltage vs temperature	T _A = 25°C					μV/°C
		T _A = −40°C to +125°C		±7			
PSRR	Input offset voltage vs power supply	V _S = 2.7 to 5.5 V, V _{CM} = V _S / 2 − 0.15 V	T _A = 25°C	±80		±350	μV/V
			T _A = −40°C to +125°C				
INPUT BIAS CURRENT							
I _B	Input bias current	T _A = 25°C		3		±50	pA
		T _A = −40°C to +125°C				±50	
I _{OS}	Input offset current	T _A = 25°C		±1			pA
		T _A = −40°C to +125°C					
NOISE							
e _n	Input noise voltage density	f = 1 MHz	T _A = 25°C	5.8			nV/√Hz
			T _A = −40°C to +125°C				
i _n	Current noise density	f = 1 MHz	T _A = 25°C	50			fA/√Hz
			T _A = −40°C to +125°C				
INPUT VOLTAGE RANGE							
V _{CM}	Common-mode voltage range	T _A = 25°C		(V−) − 0.1	(V+) − 1.5		V
		T _A = −40°C to +125°C					
CMRR	Common-mode rejection ratio	V _S = 5.5 V −0.1 V < V _{CM} < 4 V	T _A = 25°C	66	80		dB
			T _A = −40°C to +125°C	66			
INPUT IMPEDANCE							
	Differential	T _A = 25°C		10 ¹³ 1.5			Ω pF
		T _A = −40°C to +125°C					
	Common-mode	T _A = 25°C		10 ¹³ 1.5			Ω pF
		T _A = −40°C to +125°C					
OPEN-LOOP GAIN							
	Open-loop gain	V _S = 5 V 0.3 V < V _O < 4.7 V	T _A = 25°C	84	92		dB
			T _A = −40°C to +125°C	80			
FREQUENCY RESPONSE							
f _{−3dB}	Small-signal bandwidth	G = 1, V _O = 100 mVp-p, R _F = 0 Ω, T _A = 25°C		450			MHz
		G = 2, V _O = 100 mVp-p, R _L = 50 Ω, T _A = 25°C		100			MHz
		G = 2, V _O = 100 mVp-p, R _L = 150 Ω, T _A = 25°C		170			MHz
		G = 2, V _O = 100 mVp-p, R _L = 1 kΩ, T _A = 25°C		200			MHz
GBW	Gain-bandwidth product	G = 10, R _L = 1 kΩ, T _A = 25°C		200			MHz
f _{0.1 dB}	Bandwidth for 0.1-dB gain flatness	G = 2, V _O = 100 mVp-p, R _F = 560 Ω, T _A = 25°C		75			MHz
SR	Slew rate	V _S = 5 V, G = 2, 4-V output step, T _A = 25°C		300 / −360			V/μs
	Rise and fall time	G = 2, V _O = 200 mVp-p, 10% to 90% T _A = 25°C		2.4			ns
		G = 2, V _O = 2 Vp-p, 10% to 90% T _A = 25°C		8			ns
	Settling time	V _S = 5 V, G = 2, 2-V output step, 0.1% T _A = 25°C		30			ns
		V _S = 5 V, G = 2, 2-V output step, 0.01% T _A = 25°C		120			ns
	Overload recovery time	V _I × G = V _S , T _A = 25°C		8			ns

Electrical Characteristics (continued)

$V_S = 2.7\text{ V}$ to 5.5 V (single-supply). At $T_A = 25^\circ\text{C}$, $R_F = 604\ \Omega$, $R_L = 150\ \Omega$, and connected to $V_S / 2$, (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
Harmonic distortion	G = 2, f = 1 MHz, V _O = 2 Vp-p, R _L = 200 Ω T _A = 25°C (second harmonic)				–81		dBc
	G = 2, f = 1 MHz, V _O = 2 Vp-p, R _L = 200 Ω T _A = 25°C (third harmonic)				–93		dBc
Differential gain error		NTSC, R _L = 150 Ω, T _A = 25°C		0.02%			
Differential phase error		NTSC, R _L = 150 Ω, T _A = 25°C		0.05			°
OUTPUT							
Voltage output swing from rail	V _S = 5 V, R _L = 150 Ω, A _{OL} > 84 dB				0.2	0.3	V
	V _S = 5 V, R _L = 1 kΩ				0.1		V
I _O	Output current (continuous) ⁽¹⁾			±60			mA
	Output current (peak) ⁽¹⁾	V _S = 5 V, T _A = 25°C		±100			mA
		V _S = 3 V, T _A = 25°C		±80			
	Closed-loop output impedance		f < 100 kHz		0.02		
POWER SUPPLY							
V _S	Specified voltage range	T _A = 25°C		2.7		5.5	V
	Operating voltage range	T _A = 25°C		2.5 to 5.5			V
I _Q	Quiescent current (per amplifier)	V _S = 5 V, enabled; I _O = 0	T _A = 25°C	8.3		11	mA
			T _A = –40°C to +125°C	14			
SHUTDOWN							
Logic-LOW threshold ⁽²⁾ (disabled)		T _A = 25°C				0.8	V
Logic-HIGH threshold ⁽²⁾ (enabled)		T _A = 25°C		2			V
Enable time		T _A = 25°C		100			ns
Disable time		T _A = 25°C		30			ns
Shutdown current (per amplifier)		V _S = 5 V, disabled, T _A = 25°C		3.4			μA
THERMAL SHUTDOWN							
Junction temperature	Shutdown, T _A = 25°C				160		°C
	Reset from shutdown, T _A = 25°C				140		°C
Specified range		T _A = 25°C		–40		125	°C
Operating range		T _A = 25°C		–55		150	°C
Storage range		T _A = 25°C		–65		150	°C

(1) See the *Output Voltage Swing vs Output Current* (Figure 21 and Figure 23) in the *Typical Characteristics* section.

(2) Logic LOW and HIGH levels are CMOS logic compatible. They are referenced to V_- .

7.6 Typical Characteristics

$T_A = 25^\circ\text{C}$, $V_S = 5\text{ V}$, $G = 2$, $R_F = 604\ \Omega$, and $R_L = 150\ \Omega$ connected to $V_S / 2$, (unless otherwise noted)

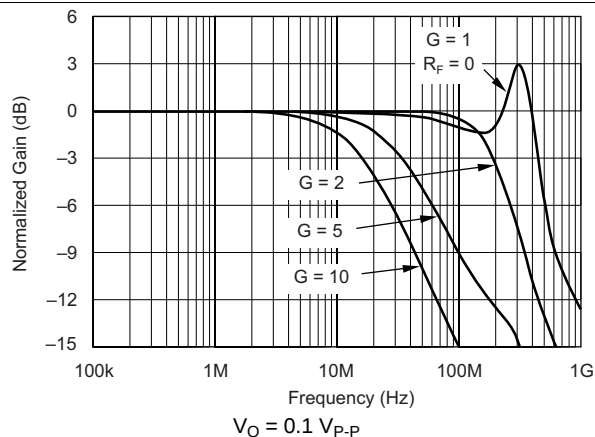


FIG 1. Noninverting Small-Signal Frequency Response

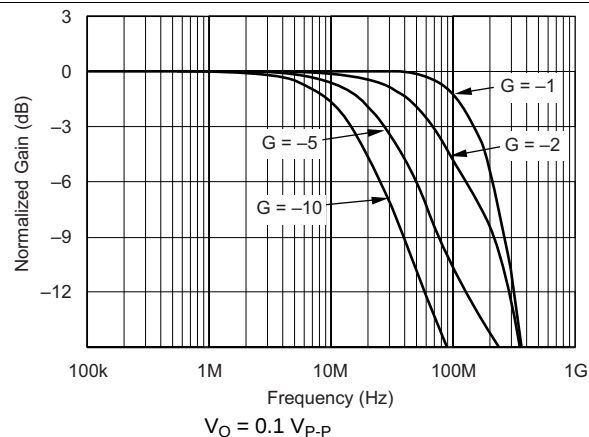


FIG 2. Inverting Small-Signal Frequency Response

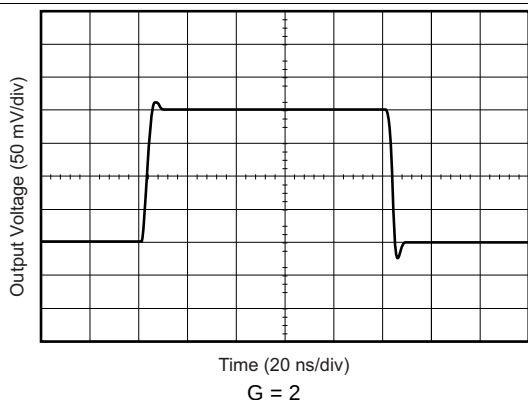


FIG 3. Noninverting Small-Signal Step Response

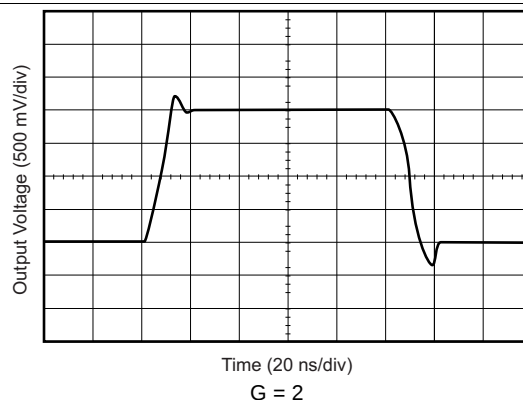


FIG 4. Noninverting Large-Signal Step Response

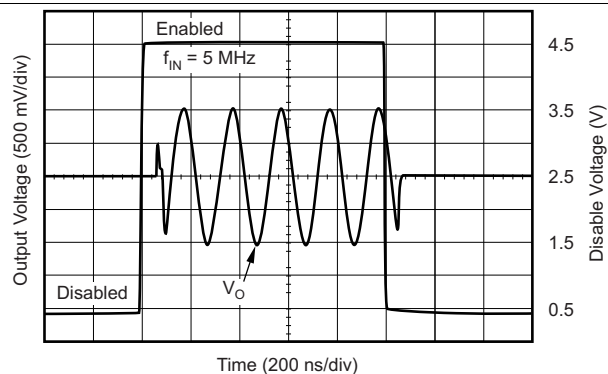


FIG 5. Large-Signal Disable and Enable Response

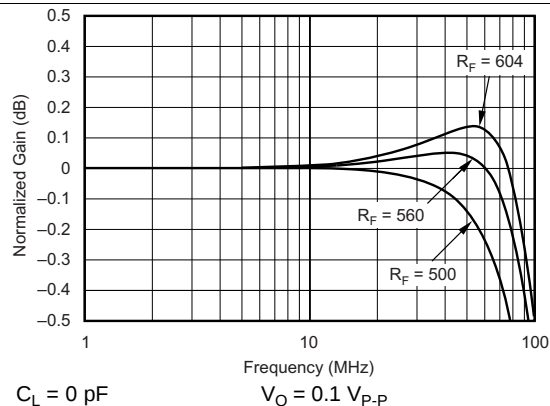


FIG 6. 0.1-dB Gain Flatness for Various R_F Values?

Typical Characteristics (continued)

$T_A = 25^\circ\text{C}$, $V_S = 5\text{ V}$, $G = 2$, $R_F = 604\ \Omega$, and $R_L = 150\ \Omega$ connected to $V_S / 2$, (unless otherwise noted)

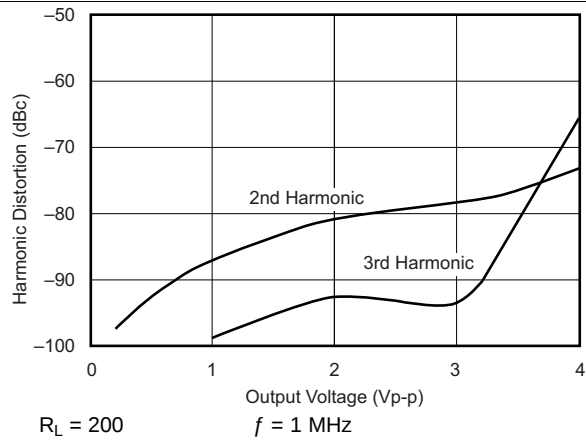


Figure 7. Harmonic Distortion vs Output Voltage

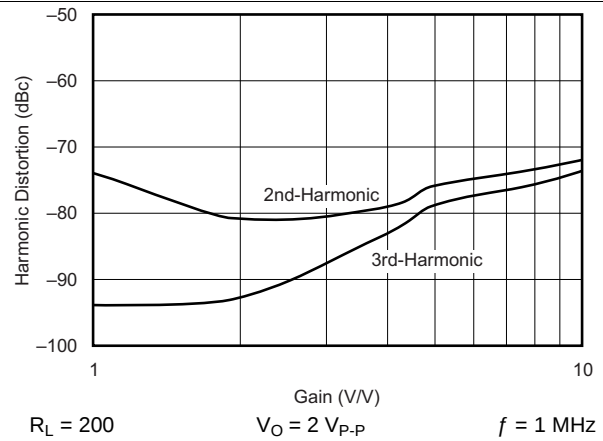


Figure 8. Harmonic Distortion vs Noninverting Gain

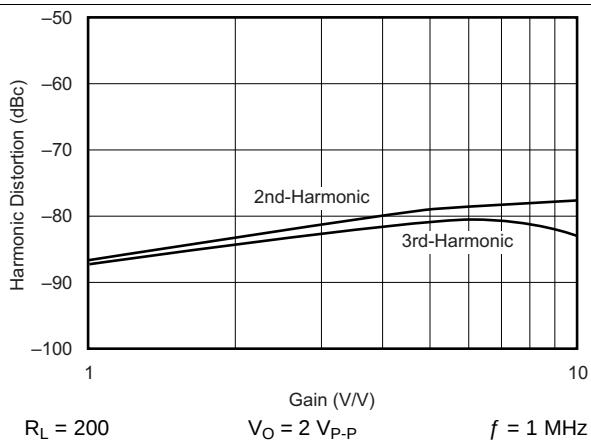


Figure 9. Harmonic Distortion vs Inverting Gain

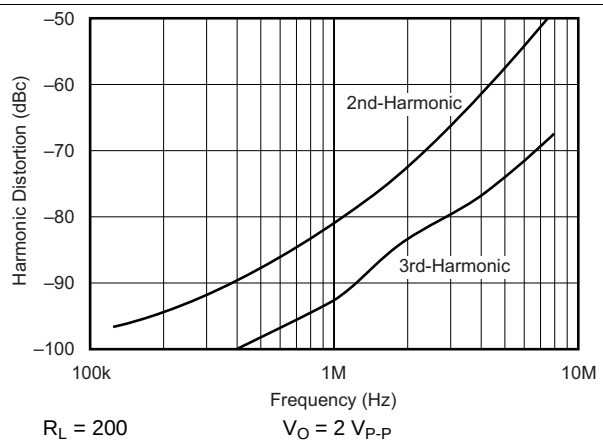


Figure 10. Harmonic Distortion vs Frequency

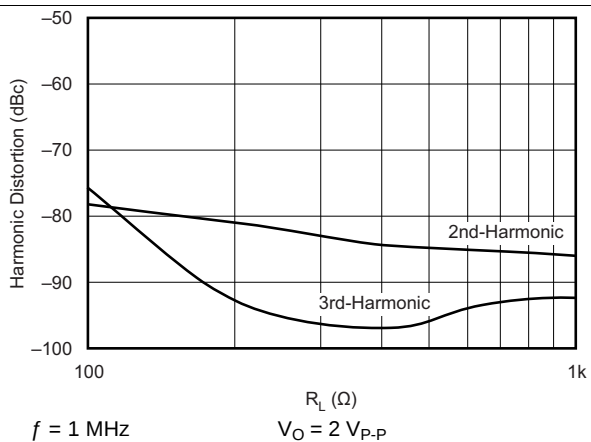


Figure 11. Harmonic Distortion vs Load Resistance

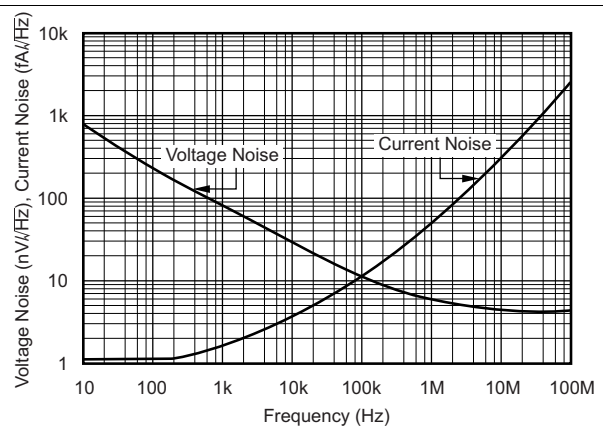


Figure 12. Input Voltage and Current Noise Spectral Density vs Frequency

Typical Characteristics (continued)

$T_A = 25^\circ\text{C}$, $V_S = 5\text{ V}$, $G = 2$, $R_F = 604\ \Omega$, and $R_L = 150\ \Omega$ connected to $V_S / 2$, (unless otherwise noted)

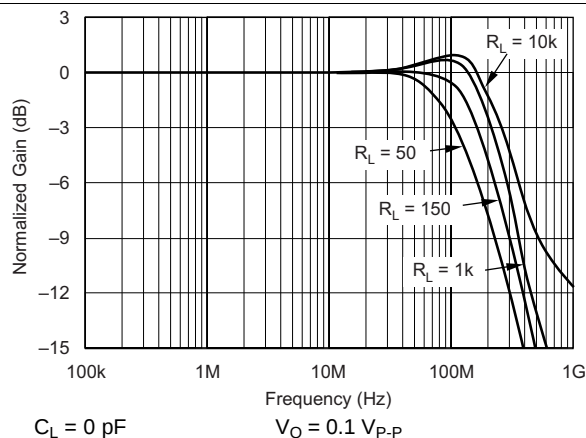


FIG 13. Frequency Response for Various R_L Values

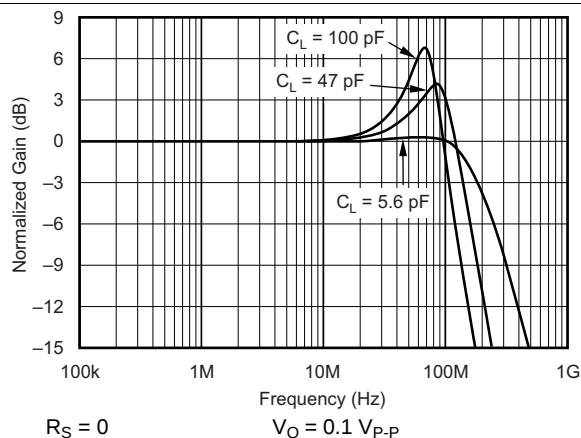


FIG 14. Frequency Response for Various C_L Values?

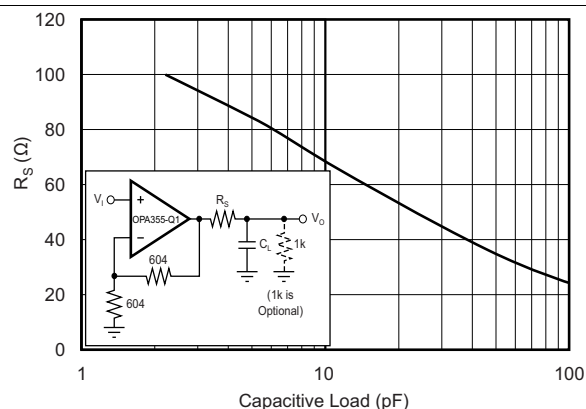


FIG 15. Recommended R_S Values vs Capacitive Load

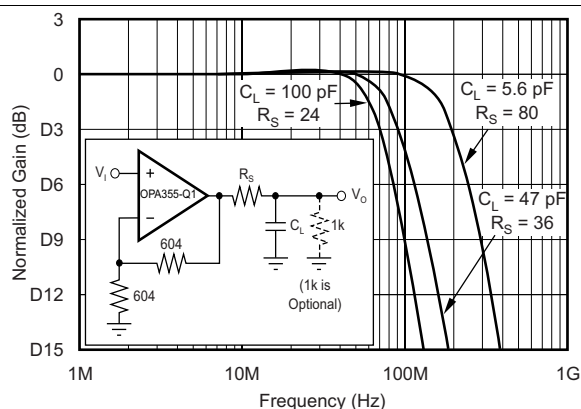


FIG 16. Frequency Response vs Capacitive Load

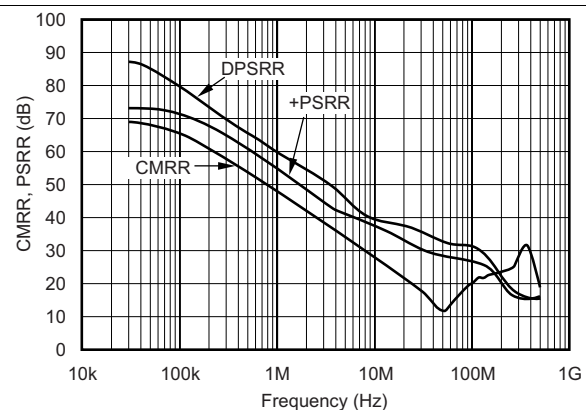


FIG 17. Common-Mode Rejection Ratio and Power-Supply Rejection Ratio vs Frequency

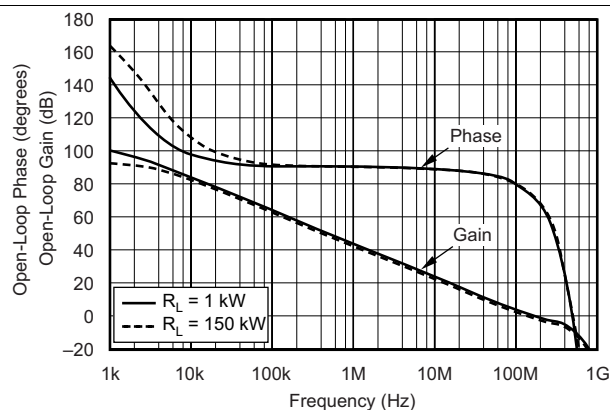


FIG 18. Open-Loop Gain and Phase

Typical Characteristics (continued)

$T_A = 25^\circ\text{C}$, $V_S = 5\text{ V}$, $G = 2$, $R_F = 604\ \Omega$, and $R_L = 150\ \Omega$ connected to $V_S / 2$, (unless otherwise noted)

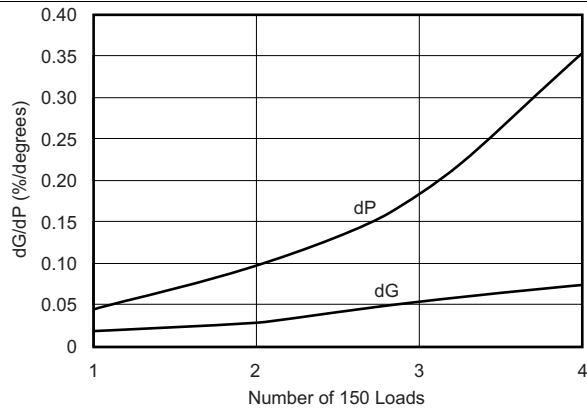


FIG 19. Composite Video Differential Gain and Phase

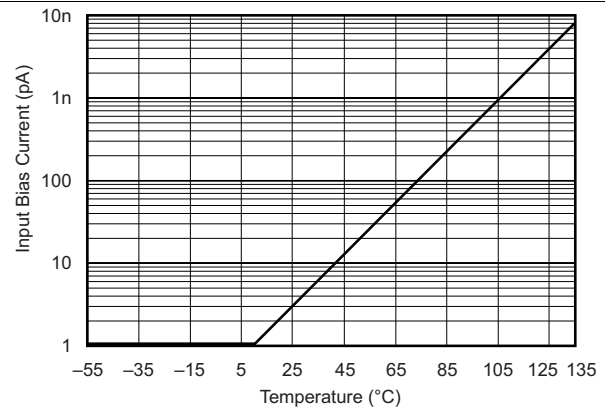


FIG 20. Input Bias Current vs Temperature

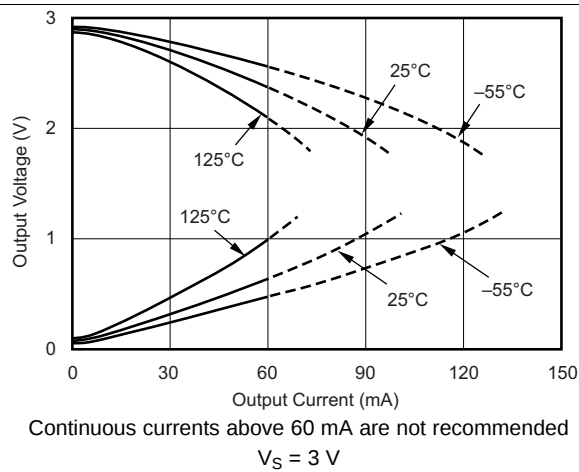


FIG 21. Output Voltage Swing vs Output Current

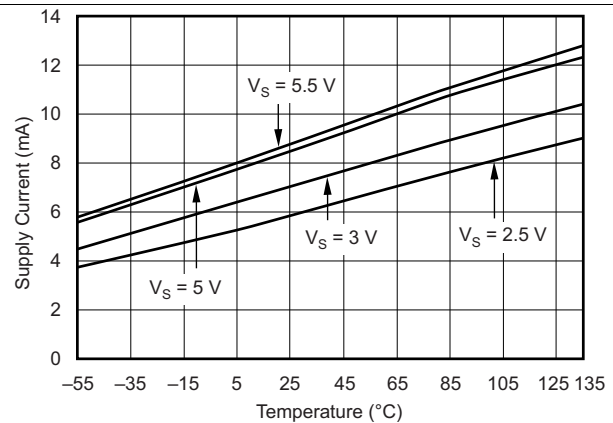


FIG 22. Supply Current vs Temperature

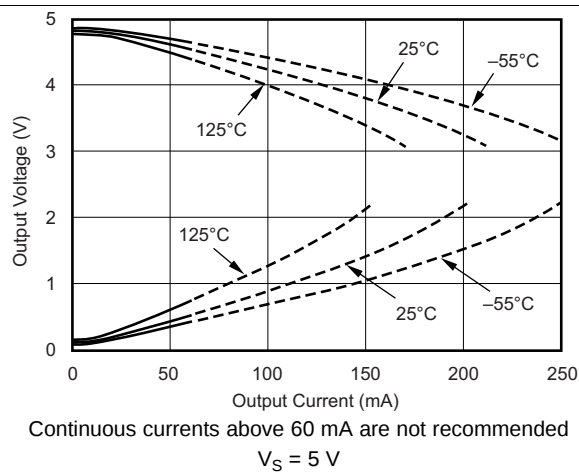


FIG 23. Output Voltage Swing vs Output Current

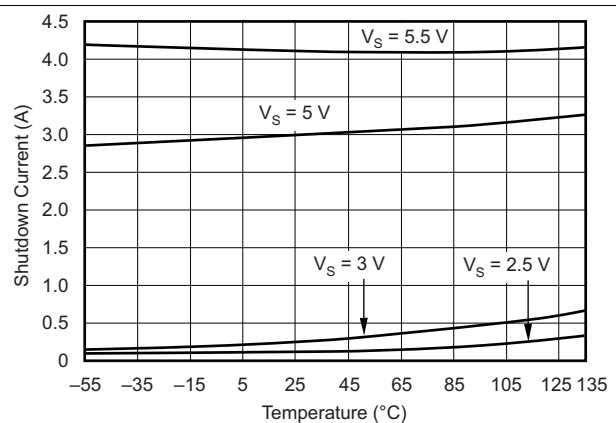


FIG 24. Shutdown Current vs Temperature

Typical Characteristics (continued)

$T_A = 25^\circ\text{C}$, $V_S = 5\text{ V}$, $G = 2$, $R_F = 604\ \Omega$, and $R_L = 150\ \Omega$ connected to $V_S / 2$, (unless otherwise noted)


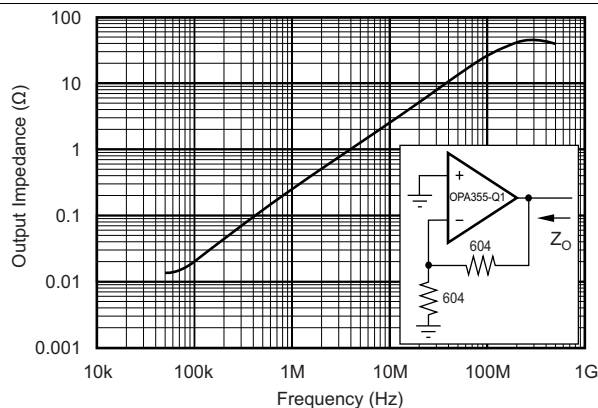


Figure 25. Closed-Loop Output Impedance vs Frequency

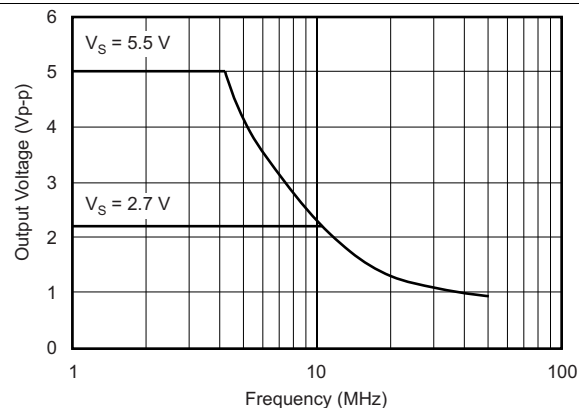

Maximum output voltage without slew-rate induced distortion

Figure 26. Maximum Output Voltage vs Frequency

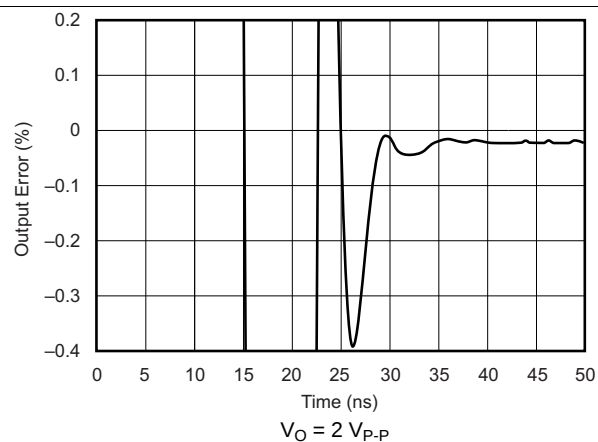


Figure 27. Output Settling Time to 0.1%

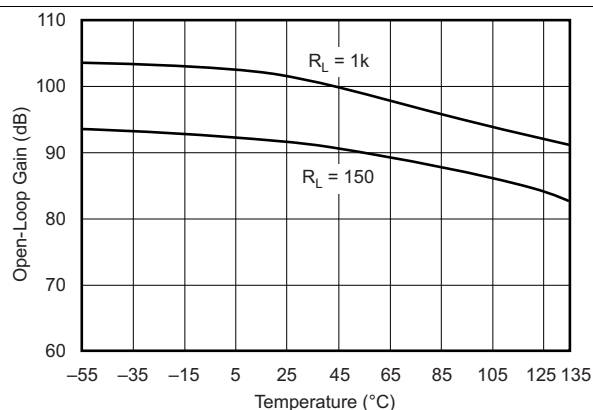


Figure 28. Open-Loop Gain vs Temperature

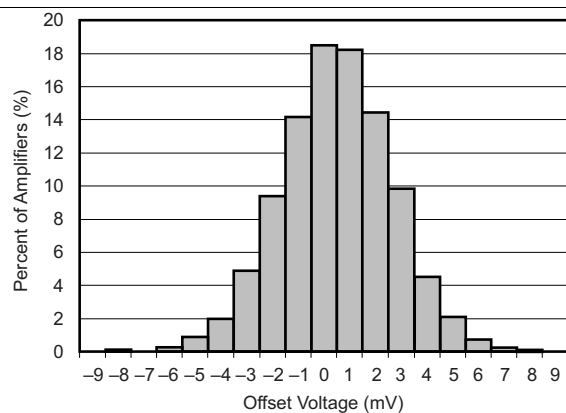


Figure 29. Offset Voltage Production Distribution

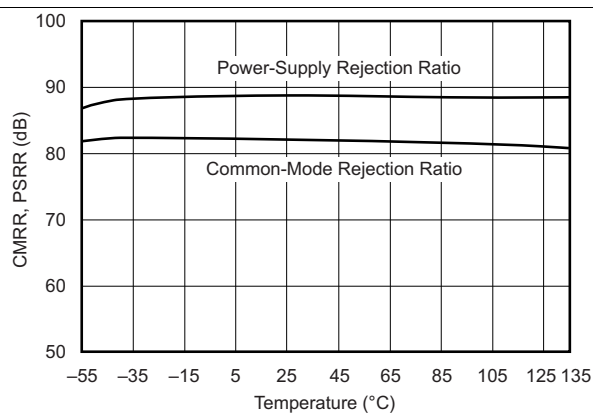



Figure 30. Common-Mode Rejection Ratio and Power-Supply Rejection Ratio vs Temperature

8 Detailed Description

8.1 Overview

The OPA355-Q1 operational amplifier is a high-speed, 300-V/ μ s, amplifier, making the device a great option for transimpedance applications. The device is unity-gain stable and can operate on a single-supply voltage (2.7 V to 5.5 V), or a split-supply voltage (± 1.35 V to ± 2.75 V), making the device highly versatile and simple to use. The OPA355-Q1 amplifier is specified from 2.7 V to 5.5 V and over the automotive temperature range of -40°C to $+125^{\circ}\text{C}$.

8.2 Functional Block Diagram

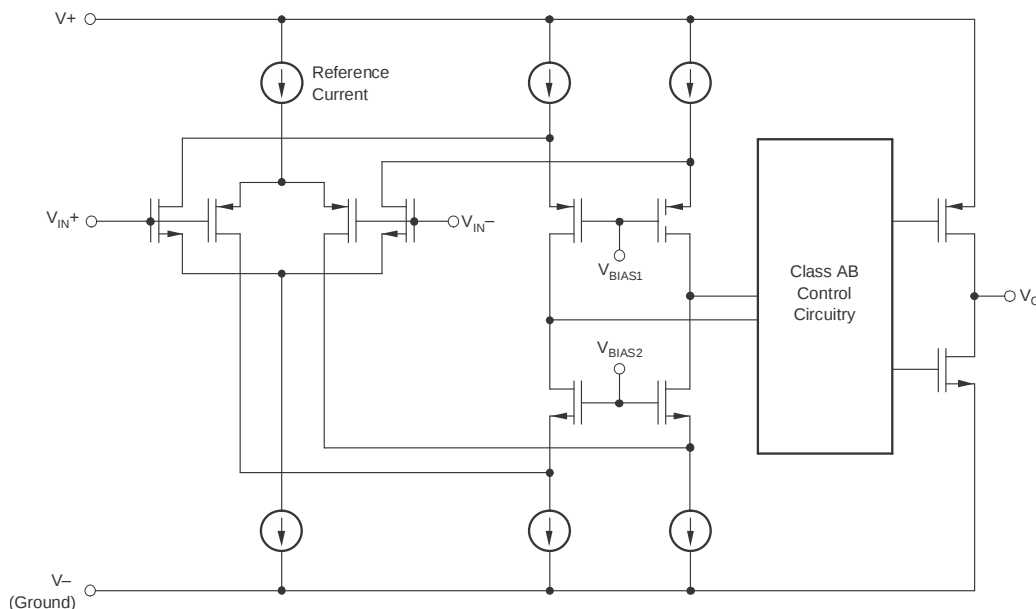

8.3 Feature Description

8.3.1 Operating Voltage

The OPA355-Q1 device is specified over a power-supply range of 2.7 V to 5.5 V (± 1.35 to ± 2.75 V). However, the supply voltage ranges from 2.5 to 5.5 V (± 1.25 to ± 2.75 V). Supply voltages higher than 7.5 V (absolute maximum) can permanently damage the amplifier.

Parameters that vary significantly over supply voltage or temperature are shown in the [Typical Characteristics](#) section of this data sheet.

8.3.2 Enable Function

The OPA355-Q1 device is enabled by applying a TTL high-voltage level to the enable pin. Conversely, a TTL low-voltage level disables the amplifier, which reduces the supply current from 8.3 mA to 3.4 μ A per amplifier. This pin voltage is referenced to a single-supply ground. When using a split-supply, such as ± 2.5 V, the enable and disable voltage levels are referenced to V^- . For portable battery-operated applications, this feature is used to greatly reduce the average current and as a result, extend battery life.

The enable input is modeled as a CMOS input gate with a 100-k Ω pullup resistor to V^+ . The enable pin assumes a logic high and the amplifier turns on if the enable pin is left open.

The enable time is 100 ns and the disable time is 30 ns, which allows the OPA355-Q1 device to operate as a *gated* amplifier, or to have the output multiplexed onto a common output bus. When disabled, the output assumes a high-impedance state.

Feature Description (continued)

8.3.3 Output Drive

The output stage supplies a high short-circuit current (typically over 200 mA). Therefore, an on-chip thermal shutdown circuit is provided to protect the OPA355-Q1 device from dangerously-high junction temperatures. At 160°C, the protection circuit shuts down the amplifier. Normal operation resumes when the junction temperature cools to below 140°C.

注

Running a continuous DC current in excess of ± 60 mA is not recommended. See the *Output Voltage Swing vs Output Current* graphs ([Figure 21](#) and [Figure 22](#)) in the [Typical Characteristics](#) section.

8.4 Device Functional Modes

The OPA355-Q1 device is powered on when the supply is connected. The device can operate as a single supply operational amplifier or dual supply amplifier depending on the application. The device can also be used with asymmetrical supplies as long as the differential voltage (V_- to V_+) is at least 1.8 V and no greater than 5.5 V (example: V_- set to -3.5 V and V_+ set to 1.5 V).

9 Application and Implementation

9.1 Application Information

The OPA355-Q1 device is a CMOS, high-speed, voltage-feedback, operational amplifier (op-amp) designed for general-purpose applications.

The amplifier features a 200-MHz gain bandwidth and 300-V/ μ s slew rate, but the device is unity-gain stable and operates as a 1-V/V voltage follower.


The input common-mode voltage range of the device includes ground, which allows the OPA355-Q1 to be used in virtually any single-supply application up to a supply voltage of 5.5 V.

9.2 Typical Applications

9.2.1 Transimpedance Amplifier

Wide gain bandwidth, low input bias current, low input voltage, and current noise make the OPA355-Q1 device a preferred wideband photodiode transimpedance amplifier. Low-voltage noise is important because photodiode capacitance causes the effective noise gain of the circuit to increase at high frequency.

The key elements to a transimpedance design, as shown in [Figure 31](#), are the expected diode capacitance ($C_{(D)}$), which must include the parasitic input common-mode and differential-mode input capacitance (4 pF + 5 pF), the desired transimpedance gain ($R_{(FB)}$), and the gain-bandwidth (GBW) for the OPA355-Q1 device (20 MHz). With these three variables set, the feedback capacitor value ($C_{(FB)}$) is set to control the frequency response. $C_{(FB)}$ includes the stray capacitance of $R_{(FB)}$, which is 0.2 pF for a typical surface-mount resistor.

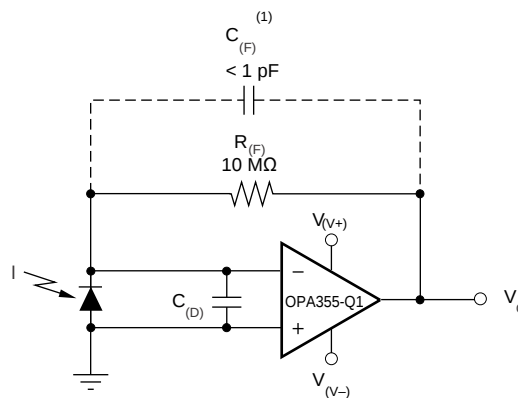

(1) $C_{(FB)}$ is optional to prevent gain peaking. $C_{(FB)}$ includes the stray capacitance of $R_{(FB)}$.

Figure 31. Dual-Supply Transimpedance Amplifier

9.2.1.1 Design Requirements

PARAMETER	VALUE
Supply voltage $V_{(V+)}$	2.5 V
Supply voltage $V_{(V-)}$	-2.5 V

9.2.1.2 Detailed Design Procedure

To achieve a maximally-flat, second-order Butterworth frequency response, the feedback pole must be set to:

$$\frac{1}{2 \times \pi \times R_{(FB)} \times C_{(FB)}} = \sqrt{\frac{GBW}{4 \times \pi \times R_{(FB)} \times C_{(D)}}} \quad (1)$$

Use [Equation 2](#) to calculate the bandwidth.

$$f_{(-3 \text{ dB})} = \sqrt{\frac{GBW}{2 \times \pi \times R_{(FB)} \times C_{(D)}}} \quad (2)$$

For other transimpedance bandwidths, consider the high-speed CMOS [OPA380](#) (90-MHz GBW), [OPA354](#) (100-MHz GBW), [OPA300](#) (180-MHz GBW), [OPA355](#) (200-MHz GBW), or [OPA656 and OPA657](#) (400-MHz GBW).

For single-supply applications, the +INx input can be biased with a positive DC voltage to allow the output to reach true zero when the photodiode is not exposed to any light, and respond without the added delay that results from coming out of the negative rail; this configuration is shown in [Figure 32](#). This bias voltage appears across the photodiode, providing a reverse bias for faster operation.

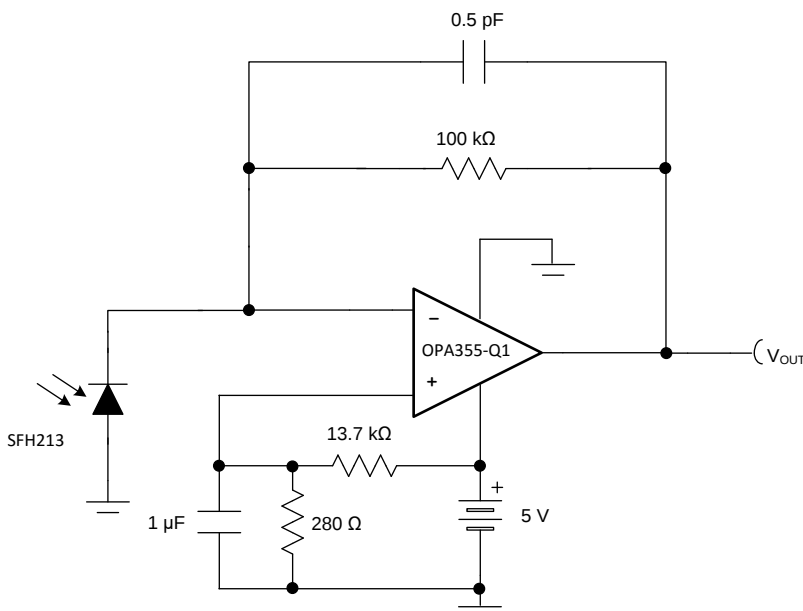


Figure 32. Single-Supply Transimpedance Amplifier

For additional information, see the [Compensate Transimpedance Amplifiers Intuitively](#) application bulletin.


9.2.1.2.1 Optimizing The Transimpedance Circuit

To achieve the best performance, select components according to the following guidelines:

1. For lowest noise, select $R_{(FB)}$ to create the total required gain. Using a lower value for $R_{(FB)}$ and adding gain after the transimpedance amplifier generally produces poorer noise performance. The noise produced by $R_{(FB)}$ increases with the square-root of $R_{(FB)}$, whereas the signal increases linearly. Therefore, signal-to-noise ratio improves when all the required gain is placed in the transimpedance stage.
2. Minimize photodiode capacitance and stray capacitance at the summing junction (inverting input). This capacitance causes the voltage noise of the op amp to amplify (increasing amplification at high frequency). Using a low-noise voltage source to reverse-bias a photodiode can significantly reduce the capacitance. Smaller photodiodes have lower capacitance. Use optics to concentrate light on a small photodiode.
3. Noise increases with increased bandwidth. Limit the circuit bandwidth to only that required. Use a capacitor across the $R_{(FB)}$ to limit bandwidth, even if not required for stability.
4. Circuit board leakage can degrade the performance of an otherwise well-designed amplifier. Clean the circuit board carefully. A circuit board guard trace that encircles the summing junction and is driven at the same voltage can help control leakage.

For additional information, see the [Noise Analysis of FET Transimpedance Amplifiers](#) and [Noise Analysis for High-Speed Op Amps](#) application bulletins).

9.2.1.3 Application Curve

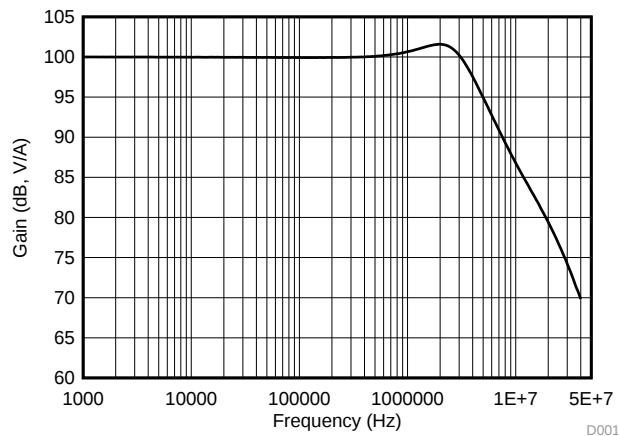


–3 dB bandwidth is 4.56 MHz

✎ 33. AC Transfer Function

9.2.2 High-Impedance Sensor Interface

Many sensors have high source impedances that may range up to 10 MΩ, or even higher. The output signal of sensors often must be amplified or otherwise conditioned by means of an amplifier. The input bias current of this amplifier can load the sensor output and cause a voltage drop across the source resistance, as shown in ✎ 34, where $V_{(+INx)} = V_S - I_{(BIAS)} \times R_{(S)}$. The last term, $I_{(BIAS)} \times R_{(S)}$, shows the voltage drop across $R_{(S)}$. To prevent errors introduced to the system as a result of this voltage, an op amp with very low input bias current must be used with high impedance sensors. This low current keeps the error contribution by $I_{(BIAS)} \times R_{(S)}$ less than the input voltage noise of the amplifier, so that it does not become the dominant noise factor. The OPA355-Q1 op amp features very low input bias current (typically 200 fA), and is therefore a preferred choice for such applications.

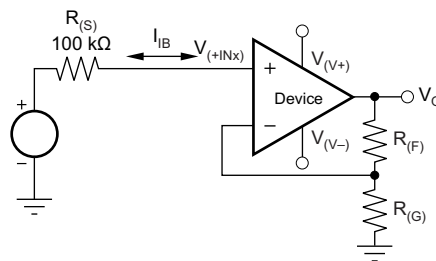


✎ 34. Noise as a Result of $I_{(BIAS)}$

9.2.3 Driving ADCs

The OPA355-Q1 op amps are designed for driving sampling analog-to-digital converters (ADCs) with sampling speeds up to 1 MSPS. The zero-crossover distortion input stage topology allows the OPA355-Q1 device to drive ADCs without degradation of differential linearity and THD.

The OPA355-Q1 device can be used to buffer the ADC switched input capacitance and resulting charge injection while providing signal gain. [Figure 35](#) shows the OPA355-Q1 device configured to drive the [ADS8326](#).

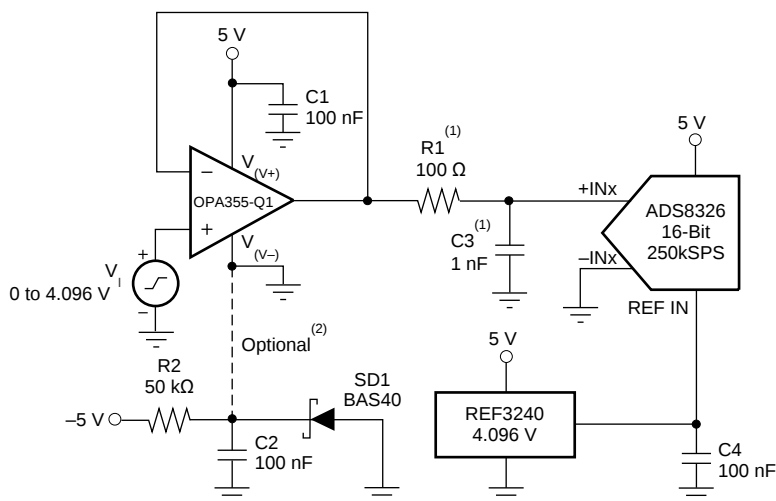

(1) Suggested value; may require adjustment based on specific application.

(2) Single-supply applications lose a small number of ADC codes near ground as a result of op amp output swing limitation. If a negative power supply is available, this simple circuit creates a -0.3 V supply to allow output swing to true ground potential.

Figure 35. Driving the ADS8326

9.2.4 Active Filter

The OPA355-Q1 device is designed for active filter applications that require a wide bandwidth, fast slew rate, low-noise, single-supply operational amplifier. [Figure 36](#) shows a 500 kHz, second-order, low-pass filter using the multiple-feedback (MFB) topology. The components are selected to provide a maximally-flat Butterworth response. Beyond the cutoff frequency, roll-off is -40 dB/dec . The Butterworth response is preferred for applications requiring predictable gain characteristics, such as the anti-aliasing filter used in front of an ADC.

One point to observe when considering the MFB filter is that the output is inverted, relative to the input. If this inversion is not required, or not desired, a noninverting output can be achieved through one of the following options:

1. Adding an inverting amplifier
2. Adding an additional second-order MFB stage
3. Using a noninverting filter topology, such as the Sallen-Key (see [Figure 37](#)).

MFB and Sallen-Key, low-pass and high-pass filter synthesis is quickly accomplished using TI's [FilterPro™](#) program. This software is available as a free download at www.ti.com.

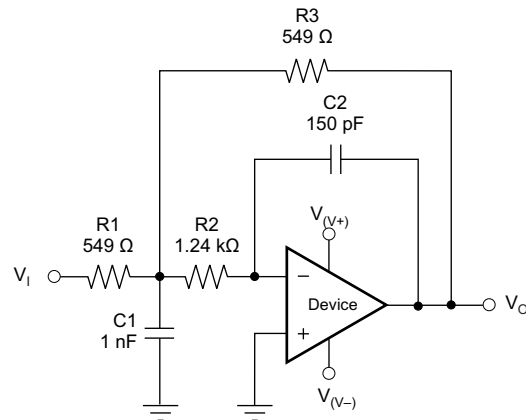


图 36. Second-Order Butterworth 500-kHz Low-Pass Filter

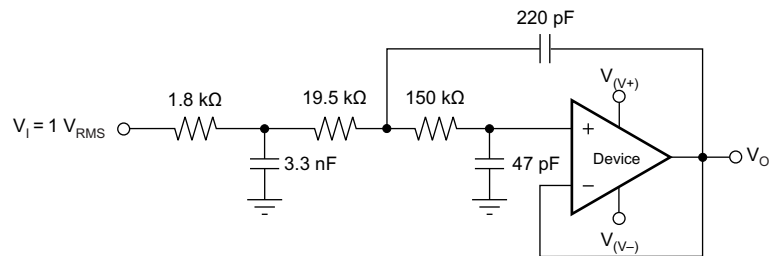


图 37. OPA355-Q1 Configured as a Three-Pole, 20-kHz, Sallen-Key Filter

10 Power Supply Recommendations

The OPA355-Q1 device is specified for operation from 2.7 to 5.5 V (± 1.35 to ± 2.75 V); many specifications apply from -40°C to $+125^{\circ}\text{C}$. Parameters that can exhibit significant variance with regard to operating voltage or temperature are shown in the [Typical Characteristics](#) section.

Place 0.1- μF bypass capacitors close to the power-supply pins to reduce errors coupling in from noisy or high-impedance power supplies. For more detailed information on bypass capacitor placement, see the [Layout Guidelines](#) section.

Power dissipation depends on power-supply voltage, signal and load conditions. With DC signals, power dissipation is equal to the product of output current times the voltage across the conducting output transistor, $V_S - V_O$. Minimize power dissipation by using the lowest possible power-supply voltage required to ensure the required output voltage swing.

For resistive loads, the maximum power dissipation occurs at a DC output voltage of one-half the power-supply voltage. Dissipation with AC signals is lower. Application bulletin AB-039, *Power Amplifier Stress and Power Handling Limitations* explains how to calculate or measure power dissipation with unusual signals and loads, and is available on www.ti.com.

Any tendency to activate the thermal protection circuit indicates excessive power dissipation or an inadequate heat sink. For reliable operation, limit junction temperature to 150°C maximum. To estimate the margin of safety in a complete design, increase the ambient temperature to trigger the thermal protection at 160°C . The thermal protection must trigger more than 35°C above the maximum expected ambient condition of the application.

11 Layout


11.1 Layout Guidelines

Good high-frequency printed-circuit board (PCB) layout techniques must be used for the OPA355-Q1. Generous use of ground planes, short direct-signal traces, and a preferred bypass capacitor located at the V+ pin ensures clean and stable operation. Large areas of copper help dissipate heat generated within the amplifier in normal operation.

Sockets are not recommended for use with any high-speed amplifier.

A 10-nF ceramic bypass capacitor is the minimum recommended value; adding a 1- μF or larger tantalum capacitor in parallel is beneficial when driving a low-resistance load. Providing adequate bypass capacitance is essential to achieving very low harmonic and intermodulation distortion.

11.2 Layout Example

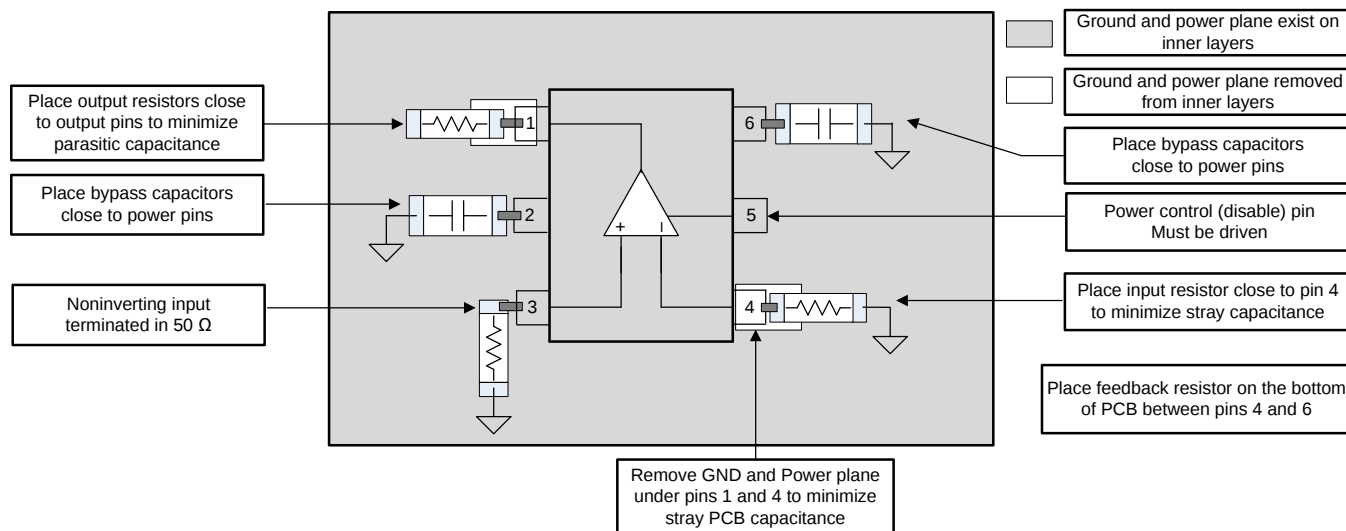

✎ 38. Layout Example

12 デバイスおよびドキュメントのサポート

12.1 商標

FilterPro is a trademark of Texas Instruments Incorporated.
All other trademarks are the property of their respective owners.

12.2 静電気放電に関する注意事項



これらのデバイスは、限定的なESD(静電破壊)保護機能を内蔵しています。保存時または取り扱い時は、MOSゲートに対する静電破壊を防止するために、リード線同士をショートさせておくか、デバイスを導電フォームに入れる必要があります。

12.3 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

13 メカニカル、パッケージ、および注文情報

以降のページには、メカニカル、パッケージ、および注文に関する情報が記載されています。この情報は、そのデバイスについて利用可能な最新のデータです。このデータは予告なく変更されることがあり、ドキュメントが改訂される場合もあります。本データシートのブラウザ版を使用されている場合は、画面左側の説明をご覧ください。

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
OPA355QDBVRQ1	ACTIVE	SOT-23	DBV	6	3000	RoHS & Green	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	SLN	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBsolete: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
OPA355QDBVRQ1	SOT-23	DBV	6	3000	178.0	9.0	3.23	3.17	1.37	4.0	8.0	Q3

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
OPA355QDBVRQ1	SOT-23	DBV	6	3000	445.0	220.0	345.0


DBV0006A



PACKAGE OUTLINE

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

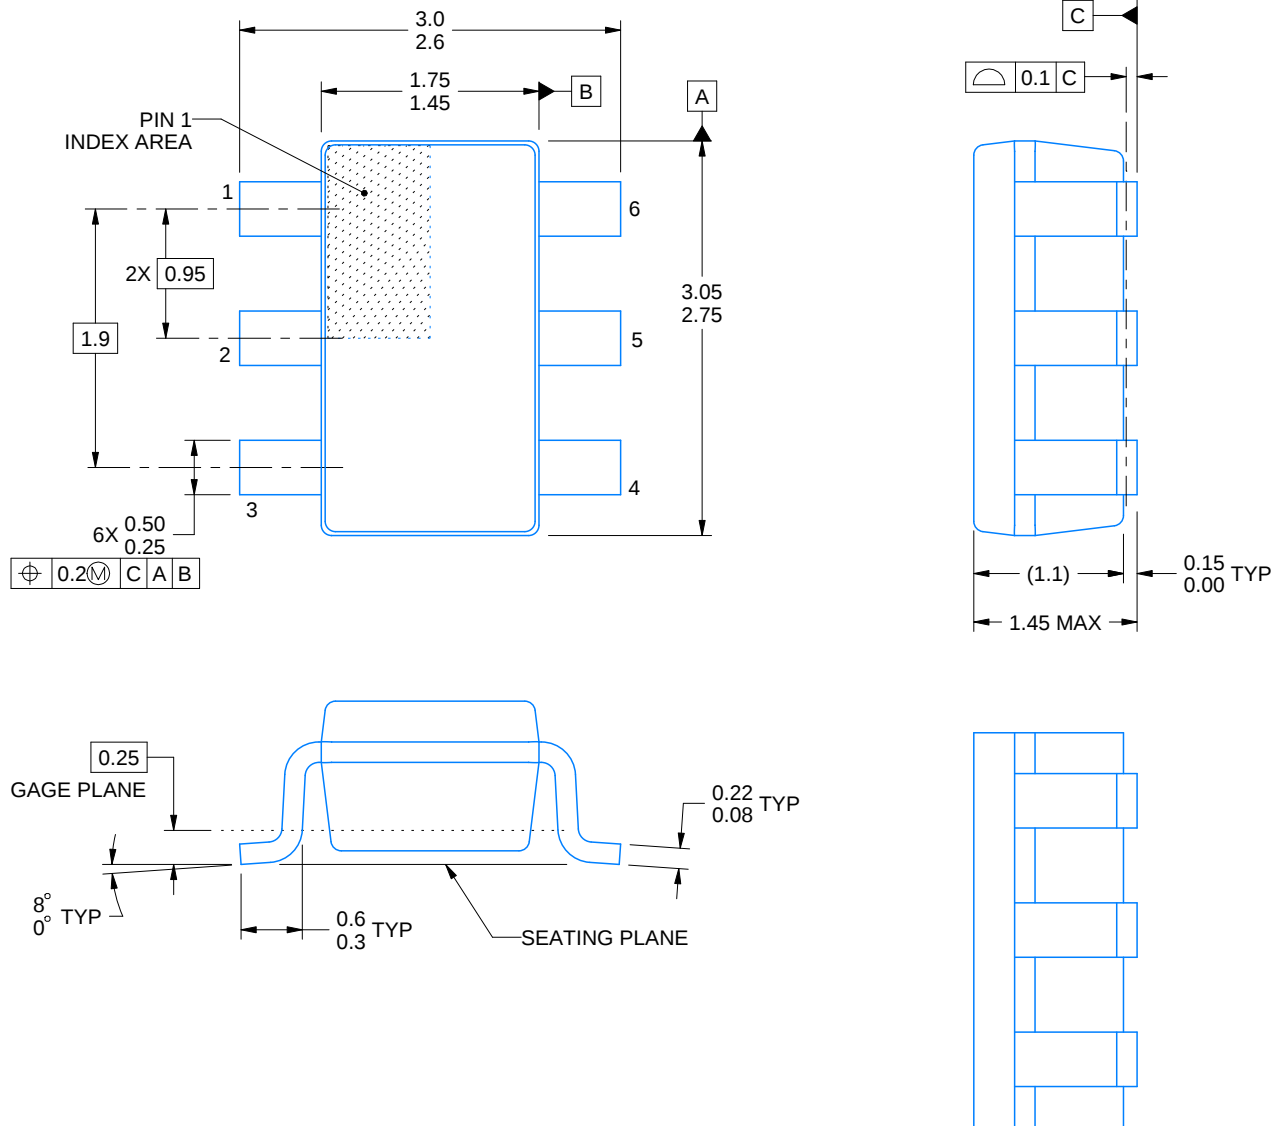

ALTERNATIVE PACKAGE SINGULATION VIEW

4214840/E 02/2024

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.25 per side.
4. Leads 1,2,3 may be wider than leads 4,5,6 for package orientation.
5. Reference JEDEC MO-178.

EXAMPLE BOARD LAYOUT


DBV0006A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

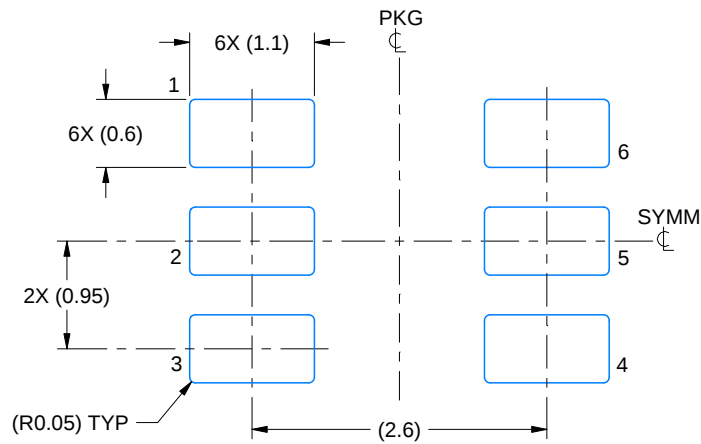

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:15X

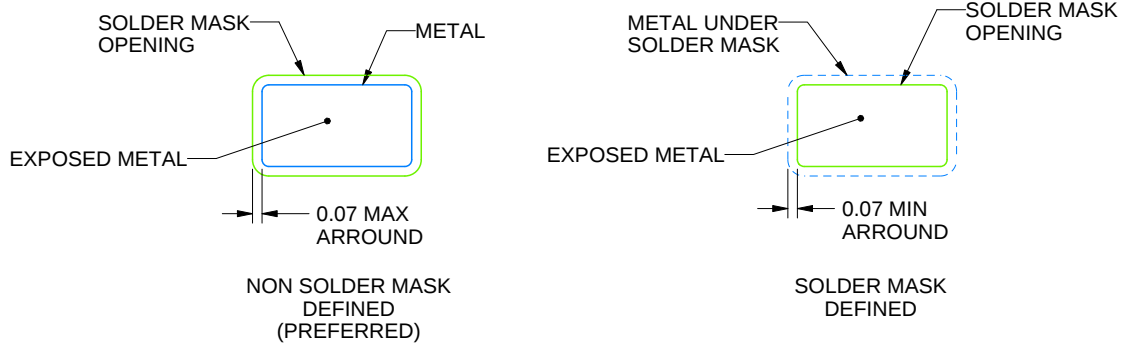

SOLDER MASK DETAILS

4214840/E 02/2024

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

DBV0006A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

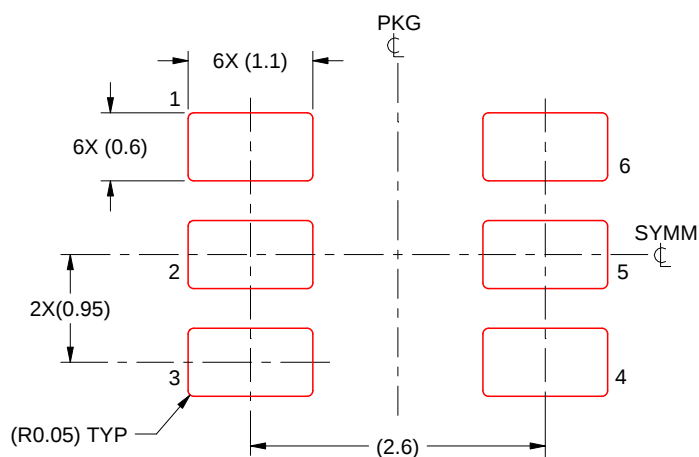

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:15X

4214840/E 02/2024

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

重要なお知らせと免責事項

TI は、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス・デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとし、TI は一切の責任を拒否します。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、[TI の販売条件](#)、または [ti.com](#) やかかる TI 製品の関連資料などのいずれかを通じて提供する適用可能な条項の下で提供されています。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。

お客様がいかなる追加条項または代替条項を提案した場合でも、TI はそれらに異議を唱え、拒否します。

郵送先住所：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2024, Texas Instruments Incorporated