



说明

该设计适用于被动进入被动启动 (PEPS) 汽车门禁系统, 该系统利用 低功耗®蓝牙 (BLE) 技术确定钥匙扣的位置。该设计展示了如何利用汽车 BLE 卫星节点计算 BLE 信号的到达角 (AoA), 并借助单个 BLE 无线微控制器与 LIN 收发器将 AoA 数据通过本地互连网络 (LIN) 进行传输。此外, 该设计表明, 仅利用两根偶极天线即可在精确计算 AoA 信息的同时减少印刷电路板 (PCB) 的解决方案尺寸。

资源

TIDA-01632

CC2640R2F-Q1

TLIN1029-Q1

TPS7B8233-Q1

SimpleLink™ 软件

设计文件夹

产品文件夹

产品文件夹

产品文件夹

软件开发套件 (SDK)

特性



- 利用仅配备两根偶极天线的 BLE 测量 AoA
- 通过 LIN 共享 BLE 连接信息、AoA 以及 RSSI 信息
- 小尺寸 45.72mm × 76.2mm (1.9" × 3.0") PCB 解决方案
- 低功耗 (< 25µA, 14V) 睡眠模式, 通过 LIN 远程唤醒
- 直流输入电压 4.65V-40V, 负载突降电压高达 45V
- 与 TI 实时定位系统 (RTLS) 软件工具箱兼容, 用于 BLE 钥匙扣的三角测量与三边测量

应用

- 被动进入被动启动 (PEPS)
- 远程免钥匙进入 (RKE)



咨询我们的 E2E™ 专家

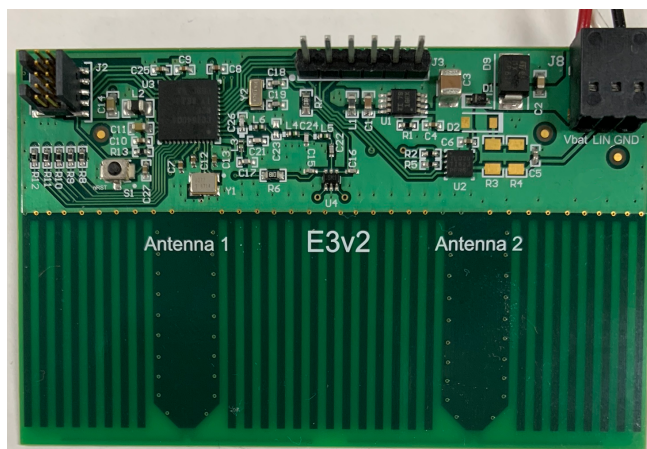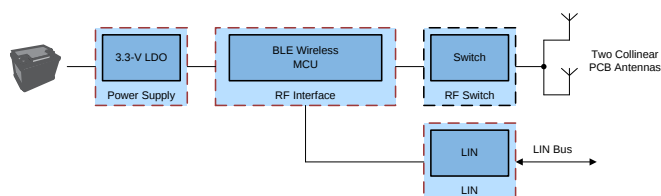

该 TI 参考设计末尾的重要声明表述了授权使用、知识产权问题和其他重要的免责声明和信息。

1 System Description

This automotive BLE car access satellite node reference design is targeted for PEPS car access systems that use angle of arrival (AoA) measurements from the signal of a BLE keyfob to help determine the location of the key around or inside the vehicle. These satellite nodes must be small enough to place around the outside of the vehicle, such as the B pillar or bumper, and yet also implement multiple antennas on the same PCB to accurately determine the AoA of a signal, thus creating a focus on PCB solution size. This design resolves the issue by using only two dipole antennas with a total PCB solution size (antennas + semiconductor devices) of 45.72 mm × 76.2 mm (1.9" × 3.0"). Furthermore, AoA data is accurately calculated and then transmitted via LIN using only a CC2640R2F-Q1 BLE MCU and TLIN1029-Q1 LIN transceiver. Lastly, these multiple BLE satellite nodes must operate when the vehicle engine is not running therefore, the total power consumption must be reduced. Accordingly, this reference design implements a single TPS7B82-Q1 ultra low-Iq LDO and leverages the wake over LIN feature the TLIN1029-Q1 offers.

The CC2640R2F-Q1 BLE MCU was chosen due to its flexibility, since it is a software defined radio with integrated memory, its ability to run a LIN slave protocol, its compliance to Bluetooth 5.0 standard and its automotive qualification. The CC2640R2F-Q1 handles the monitoring of a BLE connection (between the key fob and the central BLE module), the processing of the AoA and RSSI measurements and the LIN slave protocol.

The TLIN1029-Q1 LIN was chosen due to its ± 45 V DC fault protection, integrated transient protection, small 3-mm × 3-mm dual flat-pack no-lead (DFN) package, wake over LIN capabilities and automotive qualification. The TLIN1029-Q1 transceiver translates the logic level universal asynchronous receiver-transmitter (UART) signals from the CC2640R2F-Q1 to the battery level open-drain output of the LIN physical layer interface. In addition, the TLIN1029-Q1 waits in sleep mode for a wake signal from a LIN master and, once received, wakes the CC2640R2F-Q1 from standby mode.

The TPS7B82-Q1 LDO was chosen due to its ultra-low quiescent current at light loads (2.7 μ A typical and maximum of 5.0 μ A), its 8-pin micro small outline package (MSOP), and its automotive qualification. The TPS7B82-Q1 provides a regulated 3.3-V supply rail for the wireless MCU and logic level pull up voltage for the open-drain output of the LIN transceiver. The low quiescent current enables designers to have very low system quiescent current in low power modes while still having a regulated supply rail. This is important as BLE satellite nodes will have to operate even when the vehicle is turned off, therefore, the system is powered directly from the 12-V battery and must minimize power consumption as much as possible.

For PEPS applications there will typically be four or more of these BLE satellite node modules placed around the perimeter of the vehicle and at least one module placed inside the cabin of the vehicle for measuring the AoA and any other BLE characteristics, such as time of flight or received signal strength indication (RSSI), from the key fob to the vehicle. Each of these modules will remain in low power mode until a LIN wake message is broadcast over the LIN bus when the key fob is approaching. This LIN wake message is sent by the LIN master which is in the central security module, such as a base station module or body control module (BCM), and will individually wake one BLE node at a time. Once a BLE node is awake, the central security module will receive the AoA and any other important data from the node via LIN, and then tell the node to re-enter low power mode. All of the BLE satellite nodes will measure the incident angle, or AoA, along with any other BLE measurements (RSSI, ToF) and relay this information back to the central security module via LIN. The central module will aggregate this information and triangulate and trilaterate the position of the key fob to determine what system actions to perform like turning on welcome lights and puddle lights or unlocking the doors of the vehicle.

For remote keyless entry (RKE) applications a single BLE module like this design can be used to communicate with the key fob. The 2.4 GHz RF portion of the design can be simplified and made more compact since AoA measurements are not needed for RKE applications. Therefore, only one antenna structure is needed and the RF switch can be removed. Furthermore, the dipole antennas can be replaced with a single, smaller 2.4 GHz antenna to save additional space.

1.1 Key System Specifications


表 1. Key System Specifications

PARAMETER	SPECIFICATIONS	DETAILS
Input power source (VBATT)	Automotive 12-V battery system	节 2.4.1
Operational input voltage range (VBATT)	4.65 V to 40 V	节 2.4.1
Survivable input voltage range (VBATT)	-40 V to 45 V	节 2.4.1
Regulated voltage rail	3.3 V	节 2.4.1
Average active-state current consumption (Estimate)	11 mA	
Average standby-state current consumption	13.7 μ A	
Radio transmission range	>30 meters	
Operating temperature	-40°C to 105°C	节 2.3.1
Form factor	Rectangular, 45.72 mm $\times$ 76.2 mm (1.8" $\times$ 3.0"), 6-layer, 1-oz copper foil, printed circuit board (PCB)	4 节

2 System Overview

2.1 Block Diagram

图 1. TIDA-01632 Block Diagram

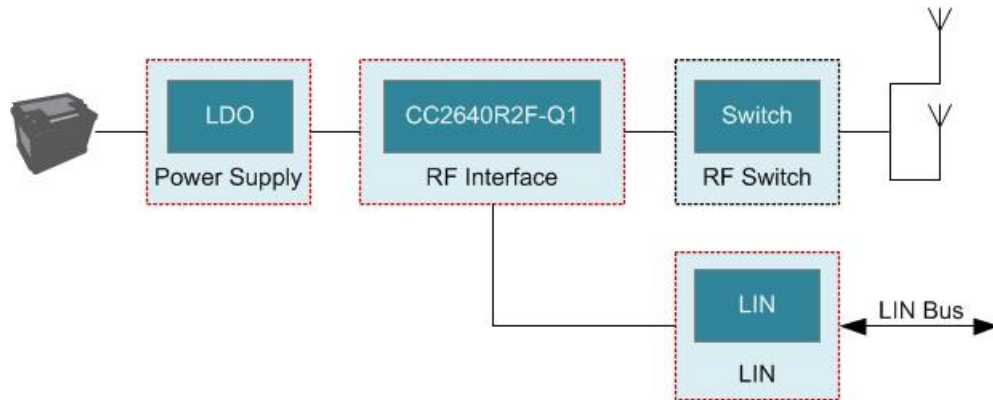

2.2 Design Considerations

The main design consideration was the two dipole antennas designed to measure the angle of arrival from a 2.4-GHz BLE signal. Keeping the antennas as small as possible was a main focus, as the dipole antennas limit the overall board shape and size. Furthermore, dipole antennas work well for this application as they do not have high directivity and radiate well perpendicular to the PCB plane.

A single small (10 mm × 8 mm × 5 mm) terminal block is used to connect power, ground, and LIN to the module. The connector size was also an important consideration to help simplify layout and ensure a compact PCB. A push-in spring connector was picked for ease of removing and adding wires to the board. In addition to the main terminal block connector, a 6-pin header is used for a direct connection to the CC2640R2F-Q1 device. This allows for access to the UART, VDDS, digital input/output (DIO) 5, and DIO 6 pins of the CC2640R2F-Q1 device for debug purposes.

Another consideration is the selection of passive components. Generally, components are selected based on the performance requirements of the applications. For active components, AEC-Q100 qualified parts are used, qualified for either temperature grade 0 or temperature grade 1. Capacitors are generally X7R grade (–55°C to +125°C) or higher. In addition, capacitors are selected with voltage ratings greater than the maximum voltage they could experience and two times the typical operating voltage to avoid DC bias effects.

2.3 Highlighted Products

The TIDA-01632 BLE satellite node reference design features the following three automotive qualified TI devices:

- CC2640R2F-Q1: Automotive Qualified SimpleLink™ Bluetooth low energy Wireless MCU
- TLIN1029-Q1: Automotive Qualified Local Interconnect Network (LIN) Transceiver With Dominant State Timeout and Low Power Wake Receiver
- TPS7B8233-Q1: Automotive Qualified 300-mA High-Voltage Ultra-Low- I_q Low-Dropout (LDO) Regulator

For more information on each of these devices, see their respective data sheets in 6 节 or their product folders listed in 资源 of this design guide.

2.3.1 CC2640R2F-Q1

The SimpleLink Bluetooth low energy CC2640R2F-Q1 device is an AEC-Q100 compliant wireless microcontroller (MCU) targeting Bluetooth 4.2 and Bluetooth 5.0 low energy automotive applications such as PEPS, remote keyless entry (RKE), car sharing, piloted parking, cable replacement, and smartphone connectivity.


The device is a member of the SimpleLink ultra-low power family of cost-effective, 2.4-GHz RF devices. Very low active RF and MCU current and low-power mode current consumption provide excellent battery lifetime allowing for operation on small coin-cell batteries and a low power-consumption footprint for nodes connected to the car battery. Excellent receiver sensitivity and programmable output power provides industry leading RF performance that is required for the demanding automotive RF environment.

The CC2640R2F-Q1 wireless MCU contains a 32-bit ARM® Cortex®-M3 processor that runs at 48 MHz as the main application processor and includes the Bluetooth 4.2 low energy controller and host libraries embedded in ROM. This architecture improves overall system performance and power consumption and frees up significant amounts of flash memory for the application.

Additionally, the device is AEC-Q100 Qualified at the Grade 2 temperature range (–40°C to +105°C) and is offered in a 7-mm × 7-mm VQFN package with wettable flanks. The wettable flanks help reduce production-line cost and increase the reliability enabled by optical inspection of solder points. The Bluetooth low energy Software Stack is available free of charge from www.ti.com.

图 2 shows a block diagram of the device.

图 2. CC2640R2F-Q1 Block Diagram

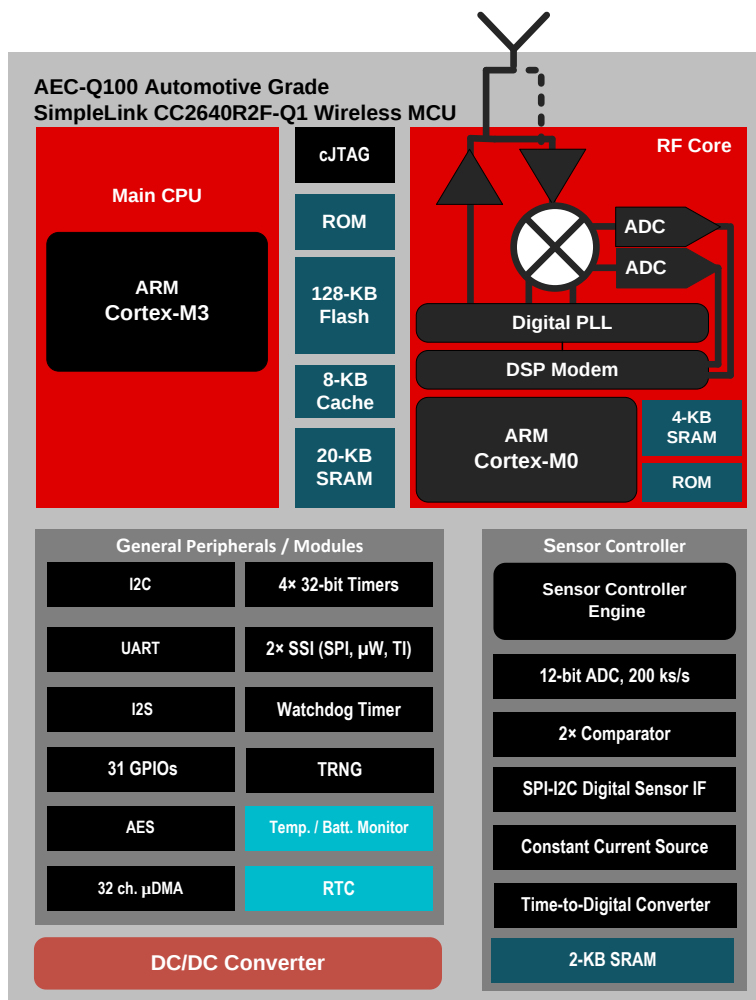

Additional features:

- Qualified for Automotive Applications
- Integrated Powerful ARM Cortex-M3
- 275-KB Nonvolatile Memory, Including 128-KB In-System Programmable Flash
- Ultra-Low Power Sensor Controller
- 2.4-GHz RF Transceiver Compatible with BLE 4.2 and 5 Specifications and Compliant to Worldwide Radio Frequency Regulations
- Link budget of 102 dB for BLE at 1 Mbps
- Efficient Code Size Architecture, Placing Drivers, Bluetooth low energy Controller, and Bootloader in ROM to Make More Flash Available for the Application
- Four General-Purpose Timer Modules (Eight 16-Bit or Four 32-Bit Timers, PWM Each)
- 12-Bit ADC, 200-kSPS, 8-Channel Analog MUX
- AES-128 Security Module
- RoHS-Compliant Automotive Grade Package: 7-mm × 7-mm RGZ VQFN48 With Wettable Flanks

- Wide Bus Fault Protection on LIN Bus of ± 45 V
- Available in SOIC (8) Package and 3 mm $\times$ 3 mm Leadless VSON (8) Package with Improved Automated Optical Inspection (AOI) Capability

2.3.3 TPS7B8233-Q1


In automotive battery-connected applications, low quiescent current (IQ) is important to save power and extend battery lifetime. It is especially necessary to have ultra-low I_Q for always-on systems.

The TPS7B82-Q1 is a low-dropout linear regulator designed for up to 40-V VIN applications. With only 2.7- μ A typical quiescent current at light load, it is an optimal solution for powering microcontrollers and CAN/LIN transceivers in stand by systems.

The device features integrated short-circuit and overcurrent protection. This device operates in ambient temperatures from -40°C to 125°C and with junction temperatures from -40°C to 150°C . Additionally, this device uses a thermally conductive package to enable sustained operation despite significant dissipation across the device. Because of these features, the device is well suited as a power supply for various automotive applications.

图 4 shows a block diagram of the device.

图 4. TPS7B8233-Q1 Block Diagram

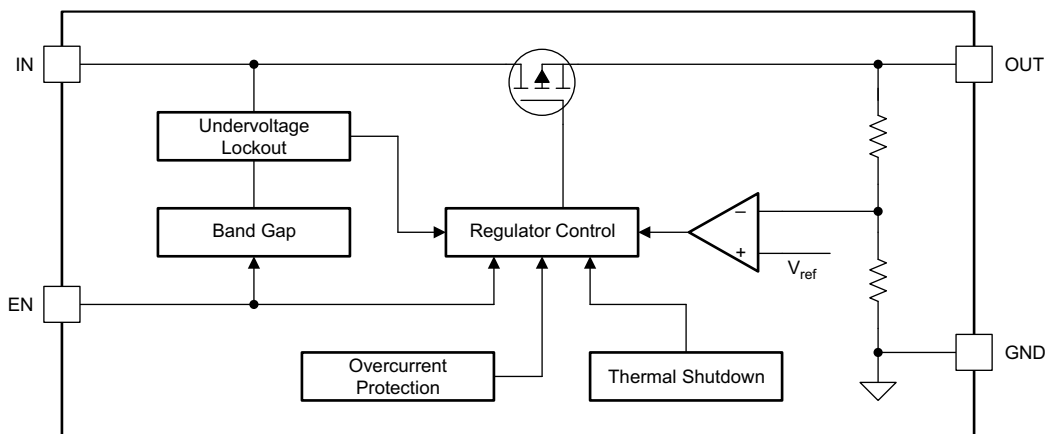

Additional features:

- Qualified for Automotive Applications
- Device Junction Temperature Range: -40°C to 150°C
- 3-V to 40-V Wide VIN Input Voltage Range With up to 45-V Transient
- Maximum Output Current of 300 mA
- Low Quiescent Current in Shutdown Mode of 300 nA Typical (when EN = Low)
- Low Quiescent Current with Light Loads of 2.7 μA Typical (when EN = High)
- 2% Output-Voltage Accuracy
- Stable with Low-ESR ($0.001\text{-}\Omega$ to $5\text{-}\Omega$) Ceramic Output-Stability Capacitor (1 μF to 200 μF)
- Fixed 5-V and 3.3-V Output Voltage Versions
- Integrated Thermal Shutdown, Short-Circuit and Overcurrent Protection
- 8-Pin MSOP Package with Thermal Resistance ($R_{\theta JA}$): 63.9°C/W


Lastly, the 3.3 V LDO was configured to remain on at all times to allow the system to either wake from BLE messages or wake from broadcasted wake-up signals on the LIN bus. To further improve the minimum operable input voltage of the TIDA-01632 design, diode D1 can be replaced with a Schottky diode which has a lower forward voltage drop.

2.4.2 Automotive Qualified SimpleLink™ Bluetooth® Low Energy Wireless MCU

图 6 shows the wireless MCU and all of its required external circuitry, the UART debugging interface, the discrete BALUN, and the RF filtering circuitry portion of the schematic.

- **Capacitors C7, C8, C9, C10, C11, C12, C13 and C25:** 100-nF decoupling capacitors for each supply input pin of the CC2640R2F-Q1
- **Inductor L2 and capacitor C14:** The data sheet recommended values for the LC output filter for the integrated buck switching regulator on the CC2640R2F-Q1
- **Connector J3:** 6-pin 100 mil header with the TX and RX signals of the UART, the VDDS power rail, the ground net, DIO 5, and DIO 6. This header was used for debugging the design and externally monitoring the UART pins. This connector can be removed to save PCB area.
- **Crystal Y1:** 24-MHz clock source for the CC2640R2F-Q1
- **Crystal Y2 and capacitors C18 and C19:** 32.768 KHz clock source with data sheet recommended 12-pF load capacitors
- **Inductors L4 and L5 and capacitors C22, C23 and C24:** RF filtering and matching network. C22 is the DC blocking capacitor and creates a high pass filter whereas inductors L4 and L5 and capacitors C23 and C24 allow a low-pass filter to be created. The combined high-pass filter and low-pass filtering circuitry operates as a band pass filter with low-pass corner frequency of 3.55 GHz which is just above the operating frequency of Bluetooth.
- **Inductors L3 and L6 and capacitors C17, C21 and C26:** These components make up the discrete BALUN which converts the RF signal from single-ended to differential, or differential to signal ended. For example the received RF signal from the RF switch (U4 in 图 8) is single-ended and the input to the CC2640R2F-Q1 is differential. To further decrease the solution size of the RF portion of the design an integrated matched BALUN plus band pass filter component like the 2450BM14G0011 from Johanson Technology can be used which has a total footprint of 1.6 mm × 0.9 mm.

图 6. Automotive SimpleLink™ BLE Wireless MCU Circuitry

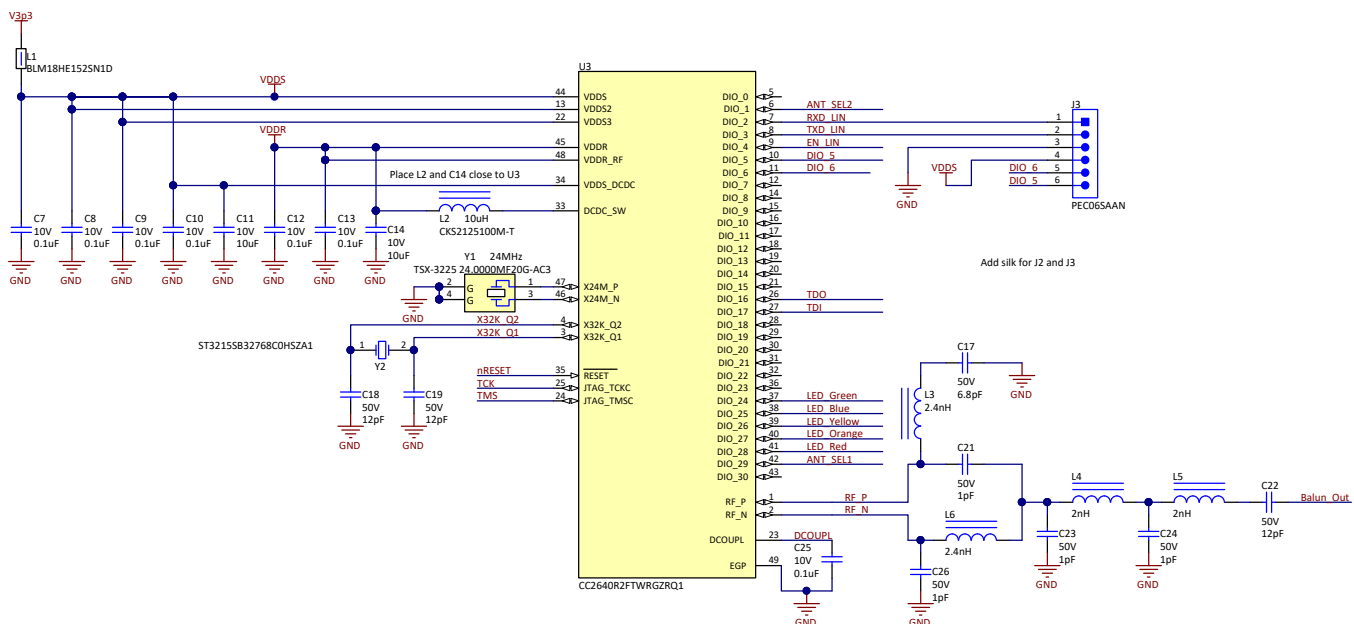

2.4.4 RF Switch for Collinear Antennas

To measure the incident angle of a BLE advertisement two or more collinear antennas are needed so that the phase of the received signal can be measured on each antenna and then the angle can be calculated. To make the design as compact as possible the minimum of two dipole antennas was used and a single pole double throw (SPDT) controlled impedance RF switch was used to switch between the two antennas. 图 8 shows the RF switch and the external circuitry.

Components R6 and C15, and R7 and C16 each create a low-pass filter on the two control inputs of the SPDT RF switch. They ensure that any noise on the control signals does not cause the switch to chatter.

图 8. Controlled Impedance RF Switch Circuitry

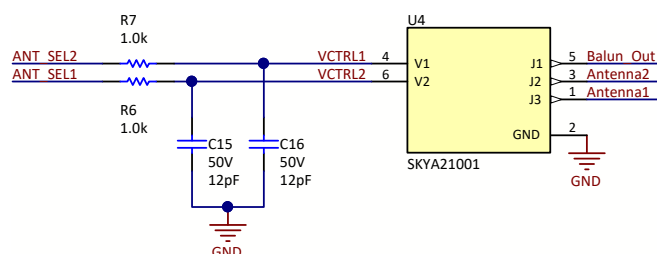


图 9 和 图 10 show the PCB dipole antennas that were used for the design. 图 9 shows the two collinear dipole antenna structures that are on layer 3 of the PCB, and 图 10 shows the PCB BALUN which is used for converting the differential signal from the dipole antennas to a single ended signal to pass to the RF switch (U4). For more information on the antenna design, see 节 4.3.2.

图 9. Dipole Antenna PCB Layer


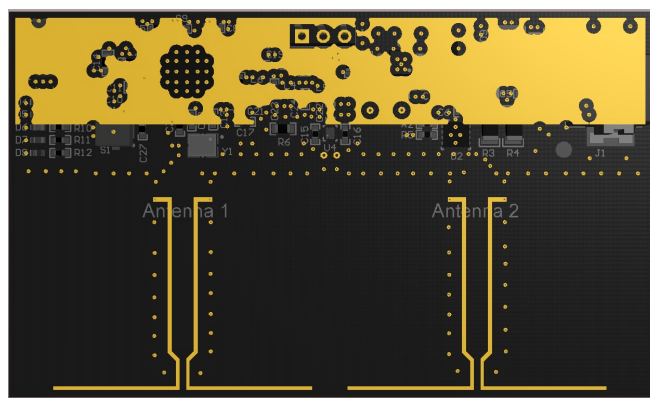


图 10. PCB BALUN

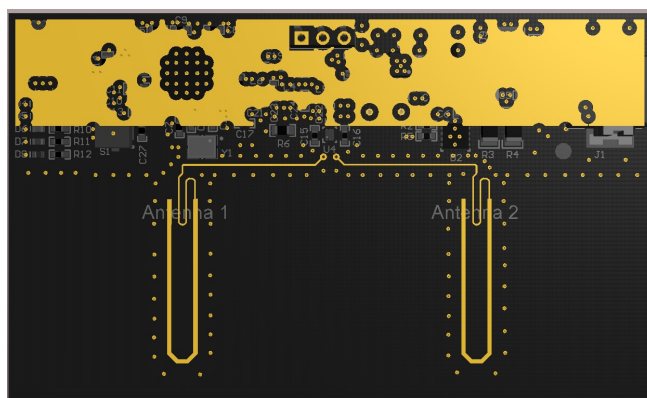


2.4.5 JTAG Programming Interface and Status LEDs

Device programming and on-chip debug support is done through J2 which has a dedicated compact Joint Test Action Group (cJTAG) interface (IEEE 1149.7) or JTAG (IEEE 1149.1) as 图 11 shows.


- **Connector J2:** J2 is a 5 × 2, 50-mil header which was used with an external XDS110 USB to JTAG debug probe for programing and debugging
- **Switch S1:** This switch is an optional small surface mount momentary single pole single throw (SPST) push button that can be used to manually reset the CC2640R2F-Q1 wireless MCU and can be removed to save PCB area
- **Resistor R13:** This is a mandatory external pullup resistor that ensures the nReset net is pulled high when the debug tool is not connected. This resistor is needed since the RESET_N pin of the CC2640R2F-Q1 does not have an integrated pullup resistor or pullup current source.
- **Capacitor C27:** This capacitor was used for filtering the switch output

图 11. JTAG Programming and Debugging Interface Circuitry

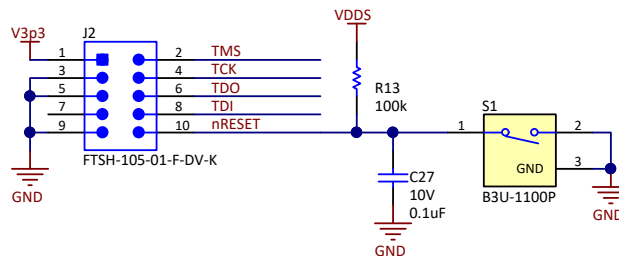

Lastly, five status LEDs have been added to the design for ease of evaluation and monitoring during testing. 图 12 shows the status LED portion of the schematic. The series resistors have been chosen in an effort to match the intensity of all 5 LEDs and keep the nominal current below 5 mA for each LED so that they can be directly driven from the GPIO pins of the CC2640R2F-Q1 wireless MCU.

图 12. Status LED Circuitry

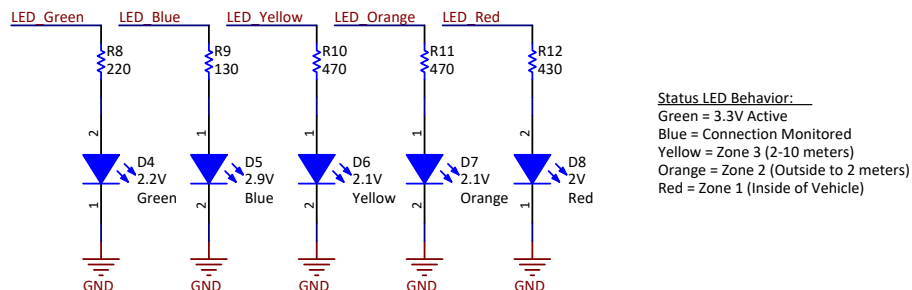

To save PCB area in a final solution test points can be used for the JTAG connections instead of connector J2, and switch S1, the status LEDs, and LED current limiting resistors can be removed.

3 Hardware, Software, Testing Requirements, and Test Results

3.1 Required Hardware

This section provides an overview of the TIDA-01632 board, the external connections, and the required hardware used to evaluate the reference design.


3.1.1 Hardware

To set-up and evaluate this design the following hardware was used:

1. Two TIDA-01632 BLE satellite node reference design PCBs. One boards was configured as a LIN master with D2, R3 and R4 populated, and one configured as a LIN slave with D2, R3 and R4 left unpopulated.
2. SimpleLink Bluetooth low energy CC2650 wireless MCU LaunchPad™ development kit. The top portion of the LaunchPad was used as a programming and debugging interface.
3. SimpleLink Bluetooth low energy CC2640R2F wireless MCU LaunchPad™ development kit. The LaunchPad was programmed to act as a key fob sending BLE angle of arrival packets that the TIDA-01632 board used to measure AoA and RSSI.
4. MIKROE-1766 1.27-mm flat cable. This cable was used to connect from the "XDS110 Out" programming connector on the CC2640R2F LaunchPad to JTAG programming connector J2 on the TIDA-01632 board.

图 13 shows all of these items.

图 13. Getting Started Hardware

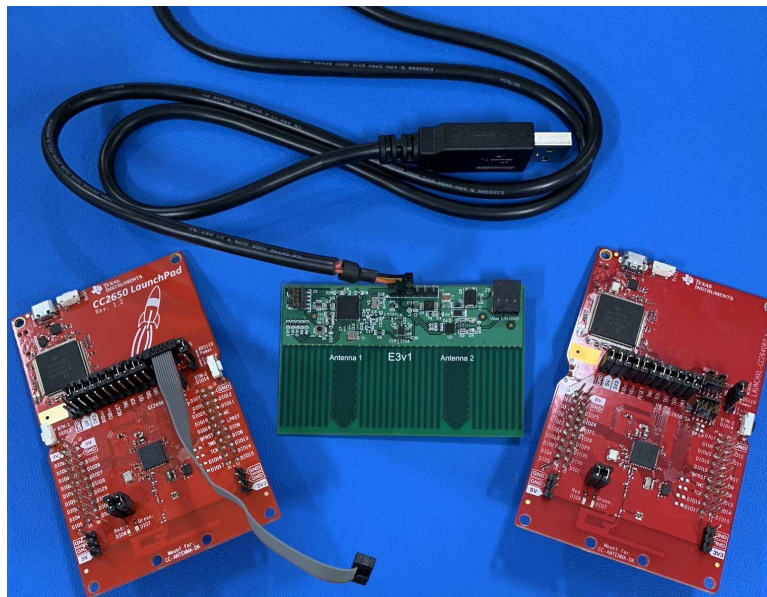


3.2 Required Software

3.2.1 Software

The CC2640R2F was programmed to monitor a BLE connection between a BLE central (that is, base station module) and BLE peripheral (that is, key fob) and calculate the angle of arrival of the signal received from a BLE key fob. Once the angle is calculated, that value is transmitted via LIN to the central control module. All software development started with the [SimpleLink™ CC2640R2 SDK](#) and was modified for the specific board pin out and LIN communications. 图 14 illustrates the software flow chart.

图 14. CC2640R2F-Q1 Flow Chart

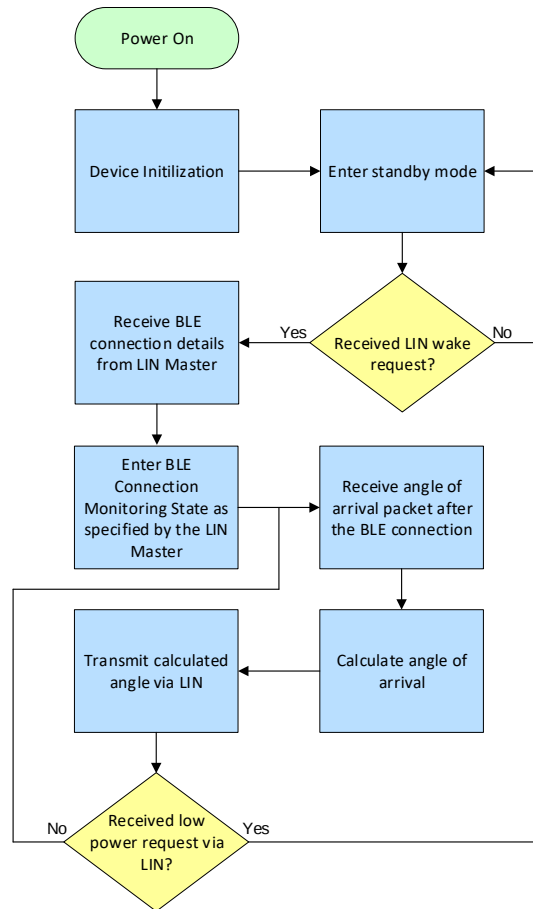

The CC2640R2F-Q1 is in a standby state until awoken from a LIN master (reducing the overall car access system power consumption). When a LIN wake request is received, the device will wake up and receive the BLE connection details such as channels, access address, and BLE connection event timings. Once this information is received, the CC2640R2F-Q1 begins monitoring the BLE connection between the LIN master module (also the BLE central) and the BLE peripheral (that is, key fob) based on the information received from the LIN master. Once the AoA packets are received, the CC2640R2F-Q1 calculates the AoA and transmits the data to the LIN master module. The CC2640R2F-Q1 will continually receive AoA packets, calculate the AoA, and transmit the data to the LIN master until the master requests for the CC2640R2F-Q1 to enter standby mode.

For more information on angle of arrival and how it is implemented, review the [angle of arrival](#) section of the SimpleLink CC2640R2 BLE-Stack User's Guide for Bluetooth 4.2. For more information on the CC2640R2F-Q1 BLE stack implementation and getting started with the SDK, review the [CC2640R2 BLE-Stack User's Guide for Bluetooth 4.2](#) and [SimpleLink Academy CC2640R2 SDK](#).

3.3 Testing and Results

The following items were evaluated on the TIDA-01632 design:

- Measuring AoA
- Transmitting AoA and RSSI data over LIN

3.3.1 Measuring AoA

An anechoic chamber with a mechanical arm inside the chamber was used to perform testing. 图 15 and 图 16 show the chamber and mechanical arm.

图 15. Anechoic Chamber


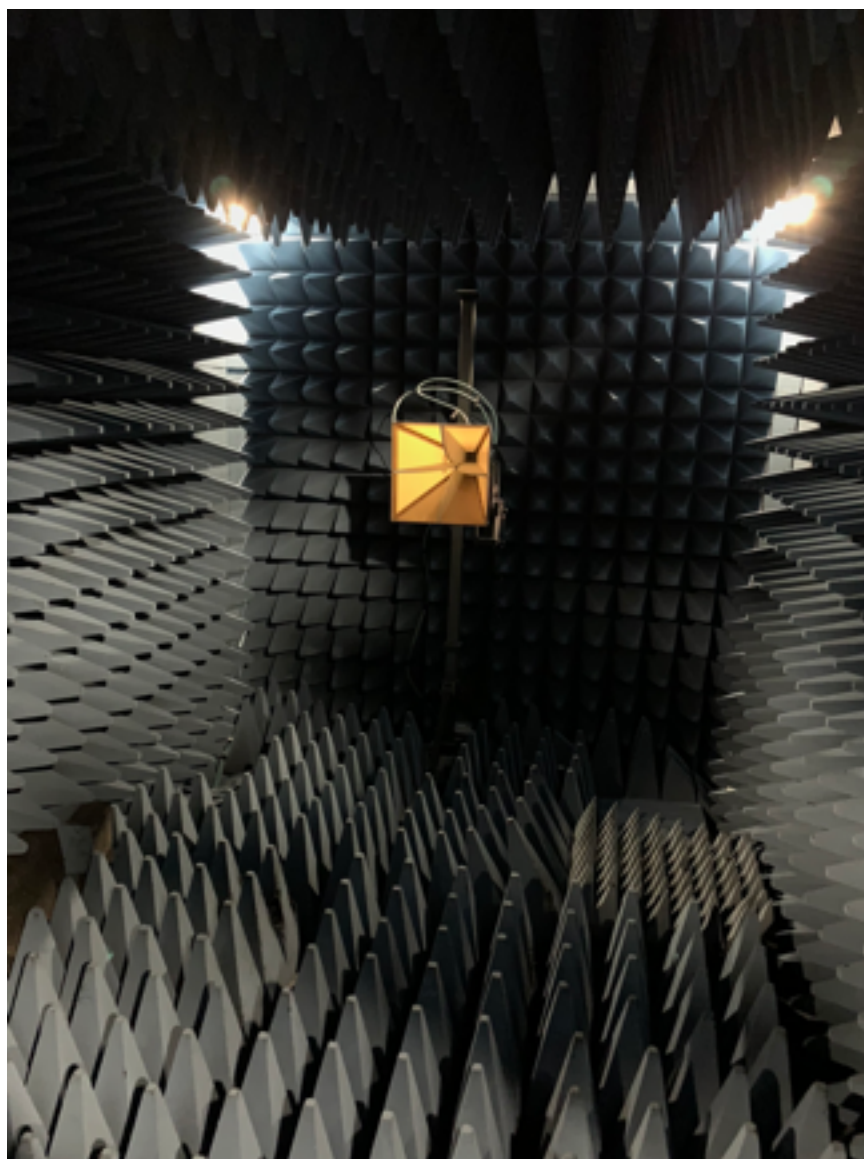


图 16. Mechanical Arm Setup

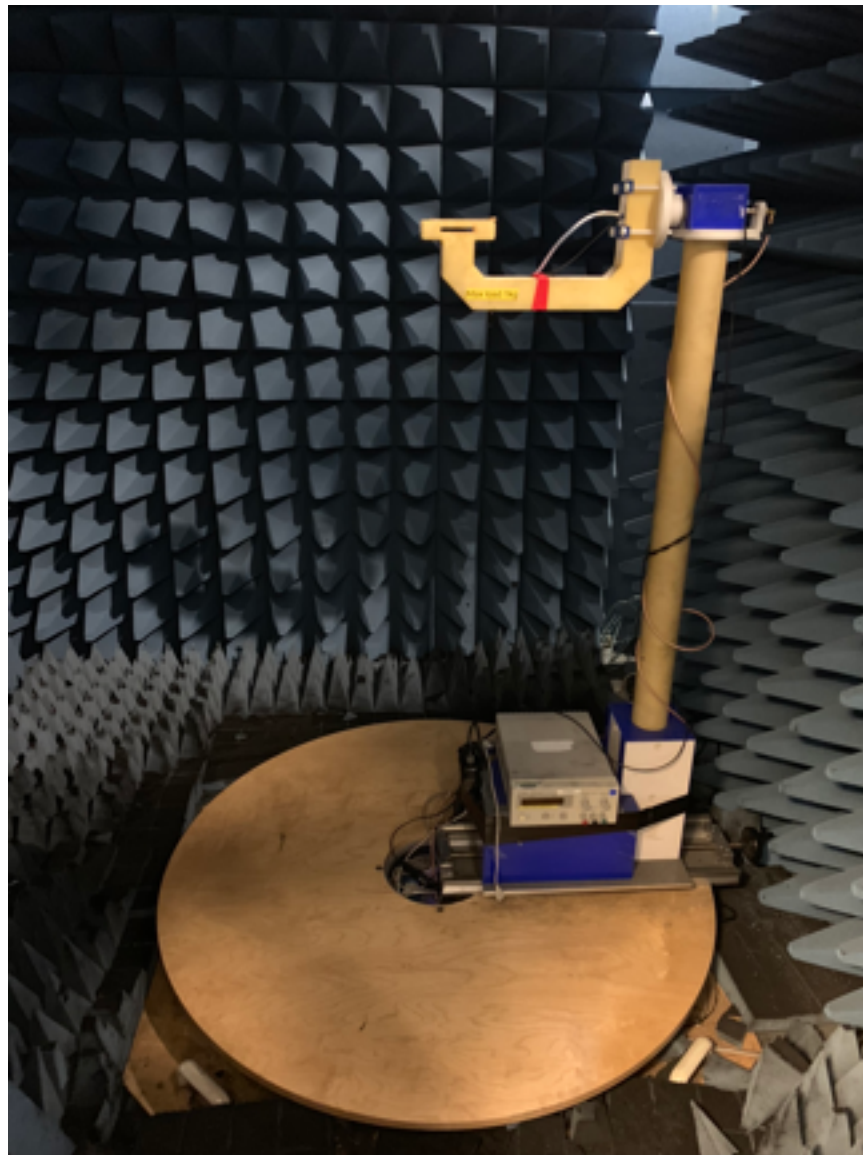

The mechanical arm is used to turn the AoA antenna 1 degree at a time. It is capable of rotating the BLE node in both the x and z directions. For testing, only rotating in the x direction is necessary to test the angle of arrival. A 0.8-mm thick metal structure was used to hold the board up and simulate the board being mounted on the metal body in an actual vehicle. A Wave-X EMI absorption sheet was also added between the metal and the PCB.

图 17 和 图 18 显示该设置。

图 17. PCB With Metal Structure Setup - Front



图 18. PCB With Metal Structure Setup - Back


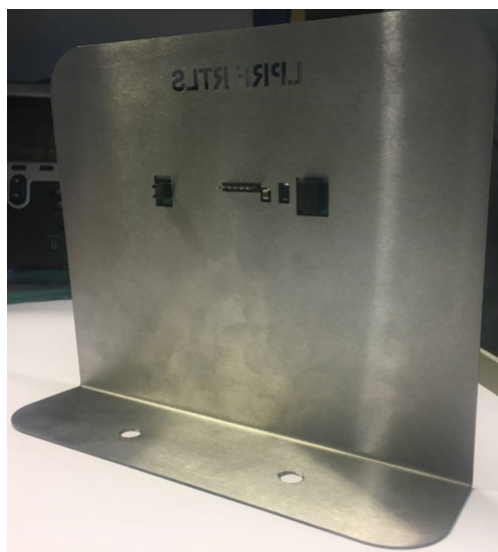



图 19 shows the calculated angle of arrival results.

图 19. Measured AoA vs Actual AoA Results

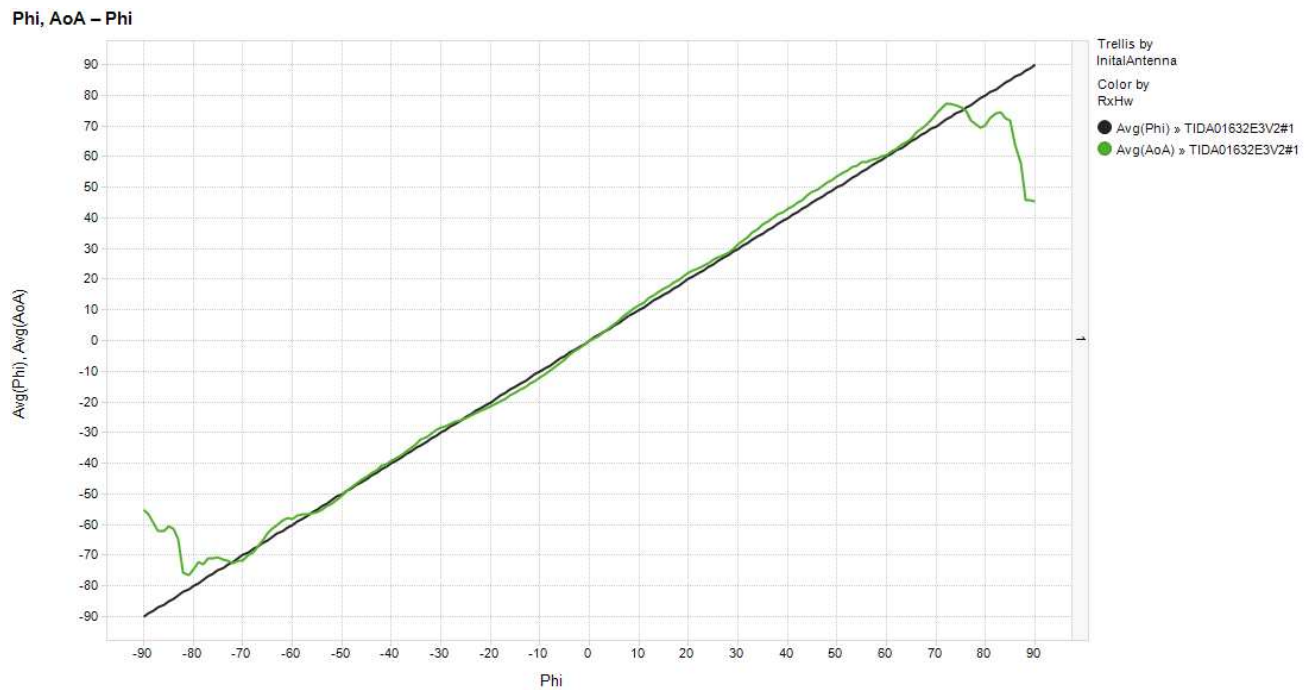

The results show the average AoA results using 13 different BLE channels. The black line represents the ideal result where the measured AoA equals the actual AoA and the green line shows the average of the AoA measurements of the 13 different channels. 图 20 shows the error from the measured AoA and the actual AoA.

图 20. AoA Measurement Error

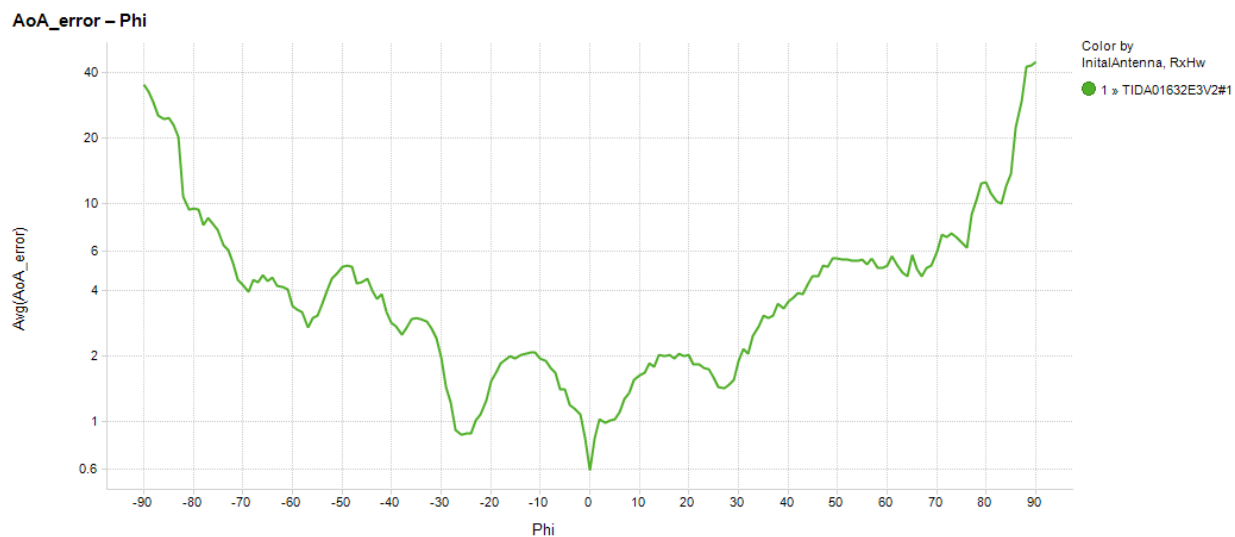

The design achieves less than 10° of error until around ±80°.

3.3.2 Transmitting AoA and RSSI Data Over LIN

The calculated AoA and RSSI values are transmitted via LIN. 图 21 shows the LIN data analyzed with a LIN serial debug tool. Software was developed to demonstrate LIN communication capabilities.

图 21. AoA and RSSI LIN Communication

To Configure the LIN Analyzer, go to: Tools and Options -> Configure LIN Analyzer

Time Stamp (sec)	Frame ID	Frame Data	Checksum	Checksum Type
2653.823316	4C	00 1E D8 07 64 00 00 00	51	Enhanced
2653.873214	4C	00 1E D8 07 64 00 00 00	51	Enhanced
2653.923930	4C	00 1E D7 07 82 00 00 00	34	Enhanced
2653.971783	4C	00 1E D7 07 82 00 00 00	34	Enhanced
2654.022908	4C	00 1E D7 07 82 00 00 00	34	Enhanced
2654.072806	4C	00 1E D7 07 82 00 00 00	34	Enhanced
2654.121886	4C	00 1E D8 07 64 00 00 00	51	Enhanced
2654.172602	4C	00 1E D8 07 64 00 00 00	51	Enhanced
2654.222500	4C	00 1E D7 07 64 00 00 00	52	Enhanced
2654.273625	4C	00 1E D7 07 64 00 00 00	52	Enhanced
2654.322296	4C	00 1E D7 07 A1 00 00 00	15	Enhanced
2654.374239	4C	00 1E D7 07 A1 00 00 00	15	Enhanced
2654.423319	4C	00 1E D7 07 82 00 00 00	34	Enhanced
2654.474444	4C	00 1E D7 07 82 00 00 00	34	Enhanced

The first and second bytes represent the calculated angle, the third byte is the measured RSSI and the fourth and fifth bytes are the execution time.

4 Design Files

4.1 Schematics

To download the schematics, see the design files at [TIDA-01632](#).

4.2 Bill of Materials

To download the bill of materials (BOM), see the design files at [TIDA-01632](#).

4.3 PCB Layout Recommendations

This section covers the following topics:

- BLE Wireless Microcontroller Layout Considerations
- Antenna Design Layout Considerations
- LIN Transceiver Layout Considerations
- LDO Layout Considerations
- Board Layer Stackup
- Layout Prints

4.3.1 BLE Wireless Microcontroller Layout Considerations

See the *Application, Implementation, and Layout* section of the [CC2640R2F-Q1 SimpleLink™ Bluetooth® low energy Wireless MCU for Automotive](#) data sheet for more information on layout recommendations. [6 节](#) has links to all the device data sheets used in this design.

4.3.2 Antenna Design Layout Considerations

Two quarter-wave dipole PCB antennas were designed to measure the angle of arrival. The dipoles measure 30.8-mm wide with a gap between the two antennas set to 4.2 mm. Quarter-wave dipole antennas are required in this design to ensure that the phase centers of the two antenna are less than half a wavelength distance from each other. In this case, the antennas are 35 mm apart from center-to-center, well below a half of a 2.4-GHz wavelength (62.5 mm).

4.3.3 LIN Transceiver Layout Considerations

See the *Layout* section of the [TLIN1029-Q1 Local Interconnect Network \(LIN\) Transceiver with Dominant State Timeout](#) data sheet for more information on layout recommendations. [6 节](#) has links to all the device data sheets used in this design.

4.3.4 LDO Layout Considerations

See the *Layout* section of the [TPS7B82-Q1 300-mA High-Voltage Ultralow-IQ Low-Dropout Regulator](#) data sheet for more information on layout recommendations. [6 节](#) has links to all the device data sheets used in this design.

4.3.5 Board Layer Stackup

The TIDA-01632 reference design board has been designed using six layers. Both top and bottom layers have signals and power traces routed, but a majority of the bottom layer has been used for a large, low-impedance ground plane. See [表 2](#) for the board stackup. The board is a 45.72 mm × 76.2 mm (1.9" × 3.0"), 6-layer, 1/2-oz copper foil with 1-oz plating on top and bottom, printed circuit board (PCB). The total board thickness is approximately 35.6 mils.

表 2. TIDA-01429 Board Layer Stackup

LAYER NAME	TYPE	MATERIAL	THICKNESS (MIL)	DIELECTRIC MATERIAL	DIELECTRIC CONSTANT
Top overlay	Overlay	—	—	—	—
Top solder	Solder mask	Surface material	0.4	Solder resist	—
Top layer	Signal	Copper	1.9	—	—
Dielectric 1	Dielectric	Core	4.2	FR-4	4.1
Layer 2	Signal	Copper	0.7	—	—
Dielectric 2	Dielectric	Core	8.0	FR-4	4.1
Layer 3	Signal	Copper	0.7	—	—
Dielectric 3	Dielectric	Core	3.8	FR-4	4.1
Layer 4	Signal	Copper	0.7	—	—
Dielectric 4	Dielectric	Core	8.0	FR-4	4.1
Layer 5	Signal	Copper	0.7	—	—
Dielectric 5	Dielectric	Core	4.2	FR-4	4.1
Bottom layer	Signal	Copper	1.9	—	—
Bottom solder	Solder mask	Surface material	0.4	Solder resist	—
Bottom overlay	Overlay	—	—	—	—

4.3.6 Layout Prints

To download the layer plots, see the design files at [TIDA-01632](#).

4.4 Altium Project

To download the Altium Designer® project files, see the design files at [TIDA-01632](#).

4.5 Gerber Files

To download the Gerber files, see the design files at [TIDA-01632](#).

4.6 Assembly Drawings

To download the assembly drawings, see the design files at [TIDA-01632](#).

5 Software Files

To download the software files, see the design files at [TIDA-01632](#).

6 Related Documentation

1. Texas Instruments, [CC2640R2F-Q1 SimpleLink™ Bluetooth® low energy Wireless MCU for Automotive Data Sheet](#)
2. Texas Instruments, [TLIN1029-Q1 Local Interconnect Network \(LIN\) Transceiver with Dominant State Timeout Data Sheet](#)
3. Texas Instruments, [TPS7B82-Q1 300-mA High-Voltage Ultralow-IQ Low-Dropout Regulator Data Sheet](#)

6.1 商标

E2E, SimpleLink are trademarks of Texas Instruments.
ARM, Cortex are registered trademarks of ARM Limited.
Altium Designer is a registered trademark of Altium LLC or its affiliated companies.
低功耗, Bluetooth are registered trademarks of Bluetooth SIG, Inc.
All other trademarks are the property of their respective owners.

7 Terminology

Passive Entry Passive Start (PEPS)—PEPS systems are a type of car access system where a user is able to approach their vehicle and the vehicle is able to wirelessly authenticate and position the approaching key fob and allow the user to gain access to the vehicle without needing to press any buttons on the key fob or use a traditional key to unlock the door.

Remote Keyless Entry (RKE)—RKE systems are a type of car access system where a user presses a button on a key fob to gain access to the vehicle without needing to use a traditional key to unlock the doors.

Bluetooth® Low Energy (BLE) —BLE is a 2.4-GHz wireless technology defined by the Bluetooth Special Interest Group (SIG) that is targeted for low power wireless communication.

Local Interconnect Network (LIN)—LIN is an automotive, single-wire, low-cost, low-speed, serial interface that is widely used in automotive applications world-wide.

Triangulation —When used in reference to a car access systems triangulation means that multiple angle of arrival (AoA) measurements are used to estimate the incident angle between known receiver module locations and an advertising node. These angles are then used to determine the absolute position of the advertising node using geometry.

Trilateration —When used in reference to a car access systems trilateration means that multiple received signal strength indicator (RSSI) measurements are used to estimate distance between known receiver module locations and an advertising node. These distances are then used to determine an absolute position of the advertising node using geometry.

Collinear —Collinear refers to any points or objects that lie on the same straight line. When used in reference to the antennas on this design it means that the antenna structures are on the same layers of the PCB and are justified to the same edge of the board. This ensures that any phase difference between the received signals of the 2 antennas is a result of the incident angle and not the layout of the board.

Low-Dropout (LDO) Regulator—An LDO is a direct current (DC) to DC voltage regulator that provides a regulated DC output voltage from an unregulated input voltage. LDOs are able to provide a regulated output voltage without the need to switch on and off and are therefore lower noise than switching regulators and do not need inductors or transformers to provide the regulated output.

8 About the Author

John P. Griffith is a systems engineer at Texas Instruments. As a member of the Automotive Systems Engineering team, John specializes on body control modules, gateway modules and car access modules and creates end equipment block diagrams and reference designs for these automotive end equipments. John earned his bachelor of science and master of science in electrical engineering from Rochester Institute of Technology in Rochester, New York.

Donovan Porter is a systems engineer at Texas Instruments. As a member of the Automotive Systems Engineering team, Donovan specializes on body control modules, gateway modules and car access modules and creates end equipment block diagrams and reference designs for these automotive end equipments. Donovan earned his bachelor of science in electrical engineering from Texas Tech University in Lubbock, Texas.

Reidar Myhr is a RF HW Application Engineer at Texas Instruments. As a member of the Low Power Radio Frequency Application Engineering team, Reidar specializes in developing and testing low power RF designs. Reidar earned his Master of Science in Electrical Engineering (MSEE) from Norwegian University of Science and Technology (NTNU) in Trondheim, Norway.

David Lara is an Applications Engineer on the SimpleLink Customer Applications Team focused on automotive customers and has worked in TI embedded processing since 2012. David earned his masters of science in electrical engineering from New Mexico State University in Las Cruces, NM.

修订历史记录

注：之前版本的页码可能与当前版本有所不同。

Changes from Original (December 2018) to A Revision	Page
• 已添加 author names.	29

重要声明和免责声明

TI 均以“原样”提供技术性 & 可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用 TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的 TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及 TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它 TI 或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI 对此概不负责，并且您须赔偿由此对 TI 及其代表造成的损害。

TI 所提供产品均受 TI 的销售条款 (<http://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 以及 [ti.com.cn](http://www.ti.com.cn) 上或随附 TI 产品提供的其他可适用条款的约束。TI 提供所述资源并不扩展或以其他方式更改 TI 针对 TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2019 德州仪器半导体技术（上海）有限公司

重要声明和免责声明

TI 均以“原样”提供技术性 & 可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用 TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的 TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及 TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它 TI 或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI 对此概不负责，并且您须赔偿由此对 TI 及其代表造成的损害。

TI 所提供产品均受 TI 的销售条款 (<http://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 以及 [ti.com.cn](http://www.ti.com.cn) 上或随附 TI 产品提供的其他可适用条款的约束。TI 提供所述资源并不扩展或以其他方式更改 TI 针对 TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2019 德州仪器半导体技术（上海）有限公司